

FLASHTM

BEST VALUE FOR MONEY

2
0
2
6



CATALOGUE

Last Updated: 8 May 2026



GOALS

To be Africa's most relevant provider of reliable, energy-efficient lighting and essential tools, offering innovative and affordable products that improve the way people live and work. All products are backed by the trusted Flash quality guarantee.

A company that improves its clients' lives by ensuring they make money and are profitable.

A company looking after its staff and improving their lives by providing a safe environment where the staff can earn a fair living and advance through the company's training and teachings.

Empowering community leaders, policemen, teachers and persons who help shape South Africa, to the end result of a safe and prosperous country for all its people.

CONTENTS

	ABOUT US	p. 4 - 7		NOVELTIES	p. 130 - 131
	LED LAMPS	p. 8 - 39		TORCHES & LANTERNS	p. 132 - 135
	INDOOR	p. 40 - 59		BATTERIES	p. 136 - 137
	OUTDOOR	p. 62 - 85		LIGHTERS	p. 138
	SOLAR	p. 86 -97		EVOLUTION	p. 140 - 143
	STRIP LIGHTS & PROFILES	p. 98 - 104		LED BASIC	p. 144 - 149
	ELECTRICAL ACCESSORIES	p. 106 - 119		HARRY'S HOMEWARE	p. 150 - 152
	HARDWARE	p. 120 - 129		ICON GLOSSARY	p. 153



LIGHT IN A GREEN BOX



PROVEN SUCCESS IN SOUTHERN AFRICA



In 24 years, Flash has grown to become South Africa's largest seller of household bulbs, LED tubes, and floodlights. Our sales figures reflect the trust customers place in the Flash brand: in 2025, we sold more than 850,000 floodlights, 1.1 million LED tubes, and 5 million household light bulbs.



**Over 5 million
Household Bulbs SOLD**



**Over 1,100,000 LED Tubes
SOLD**



**850,000 Floodlights
SOLD**

WHAT SETS US APART



01. Over 23 Years of Industry Leadership in Lighting

And more than 80 years of combined trade experience with China

04. New Performance Standards

Fully compliant with the 105 lumen per watt standard required by May 2026.

07. Customized Promotions

Personalized promotions dedicated to establish and your market presence.

02. Strict Quality Control

Rigorous testing at three points: our South African testing lab, our Chinese lab, and during manufacturing.

05. 3 Year Guarantee

A generous 3-year guarantee on most LED products, and a "no questions asked" returns policy.

08. Free Online Training

Complimentary training for clients and staff, including Flash Understanding Lighting booklets.

03. Standards & Compliance

Rigorous testing at three points: our South African testing lab, our Chinese lab, and during manufacturing.

06. Daily Deals & Specials

Daily product specials tailored to increase our clients' turnover and profitability.

09. Exclusive Competition

Engaging free SMS game for retail floor staff offering weekly cash prizes.

QUALITY TESTING PROCESS

01.



Testing Samples Pre-Production

All samples are thoroughly tested by Flash's specialized lighting engineers before production begins.

02.



Flash Testing Lab in China

Fully equipped with state-of-the-art testing instruments—including integrating spheres and IP testing machines.

03.



Testing On Production Line

Flash engineers on the ground during production, testing samples in real time to ensure quality at every stage.

04.



Flash Testing Lab South Africa

Final in-house testing conducted to verify product compliance and performance before market release.

DISPLAY & MERCHANDISING STANDS

Flash offers custom-designed display solutions, branded merchandising stands, and promotional bins — ensuring your in-store merchandising needs are met with high-quality, professional-grade materials. Expect a whole new range of stands, from metal to cardboard, suitable for a variety of products and store layouts.



CUSTOM DISPLAY STANDS



CUSTOM - MADE STANDS



MERCHANDISING STANDS



**HIGH
EFFICIENCY**
More Light,
Less Electricity

NEW REGULATION LED LAMPS

NOW WITH
105 Lumen Per Watt

More Lumen Means More Light




Scan the QR Code
for more Info

[◀ BACK TO CONTENTS PAGE](#)

LED General Purpose A60 Lamps [230V 50Hz] Non-Dimmable - Opal - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours




TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/BA-A60	5E23	LED A60 Lamp	525 lm	5W	E27	220°	3000K	108mm x 60mm	50
E/BA-A60	5E24	LED A60 Lamp	525 lm	5W	E27	220°	4000K	108mm x 60mm	50
E/BA-A60	5E26	LED A60 Lamp	525 lm	5W	E27	220°	6000K	108mm x 60mm	50
E/BA-A60	5B3	LED A60 Lamp	525 lm	5W	B22	220°	3000K	108mm x 60mm	50
E/BA-A60	5B4	LED A60 Lamp	525 lm	5W	B22	220°	4000K	108mm x 60mm	50
E/BA-A60	5B6	LED A60 Lamp	525 lm	5W	B22	220°	6000K	108mm x 60mm	50
E/BA-A609	9E23	LED A60 Lamp	945 lm	9W	E27	220°	3000K	108mm x 60mm	50
E/BA-A609	9E24	LED A60 Lamp	945 lm	9W	E27	220°	4000K	108mm x 60mm	50
E/BA-A609	9E26	LED A60 Lamp	945 lm	9W	E27	220°	6000K	108mm x 60mm	50
E/BA-A609	9B3	LED A60 Lamp	945 lm	9W	B22	220°	3000K	108mm x 60mm	50
E/BA-A609	9B4	LED A60 Lamp	945 lm	9W	B22	220°	4000K	108mm x 60mm	50
E/BA-A609	9B6	LED A60 Lamp	945 lm	9W	B22	220°	6000K	108mm x 60mm	50
E/XLED-A60012	12E23	LED A60 Lamp	1260 lm	12W	E27	220°	3000K	108mm x 60mm	50
E/XLED-A60012	12E24	LED A60 Lamp	1260 lm	12W	E27	220°	4000K	108mm x 60mm	50
E/XLED-A60012	12E26	LED A60 Lamp	1260 lm	12W	E27	220°	6000K	108mm x 60mm	50
E/XLED-A60012	12B3	LED A60 Lamp	1260 lm	12W	B22	220°	3000K	108mm x 60mm	50
E/XLED-A60012	12B4	LED A60 Lamp	1260 lm	12W	B22	220°	4000K	108mm x 60mm	50
E/XLED-A60012	12B6	LED A60 Lamp	1260 lm	12W	B22	220°	6000K	108mm x 60mm	50

LED General Purpose A60 Lamps [230V 50Hz] 3-Step Dimmable - Opal - 3 Year Guarantee


Convert any room to dimmable by replacing lamps with 3-Step dimmable lamps.
No electrician, no electrical components, no dimmer required.
High efficiency of 105 lm/W with a rated lifespan of 15,000 hours




Switch off/on to change the brightness level of the lamp



Step 1
Brightness 100%



Step 2
Brightness 60%



Step 3
Brightness 20%

TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/BA-A60	5E233DM	3-Step DIMM LED A60 Lamp	525 lm	5W	E27	220°	3000K	108mm x 60mm	50
E/BA-A60	5E263DM	3-Step DIMM LED A60 Lamp	525 lm	5W	E27	220°	6000K	108mm x 60mm	50
E/BA-A60	5B333DM	3-Step DIMM LED A60 Lamp	525 lm	5W	B22	220°	3000K	108mm x 60mm	50
E/BA-A60	5B633DM	3-Step DIMM LED A60 Lamp	525 lm	5W	B22	220°	6000K	108mm x 60mm	50
E/BA-A609	9E233DM	3-Step DIMM LED A60 Lamp	945 lm	9W	E27	220°	3000K	108mm x 60mm	50
E/BA-A609	9E263DM	3-Step DIMM LED A60 Lamp	945 lm	9W	E27	220°	6000K	108mm x 60mm	50
E/BA-A609	9B333DM	3-Step DIMM LED A60 Lamp	945 lm	9W	B22	220°	3000K	108mm x 60mm	50
E/BA-A609	9B633DM	3-Step DIMM LED A60 Lamp	945 lm	9W	B22	220°	6000K	108mm x 60mm	50

LED A60 Day/Night Sensor Lamp [230V 50Hz] Non-Dimmable - Opal - 3 Year Guarantee

Day/Night Sensor turns ON at Dusk & Off at Dawn
High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Wattage



Available Caps



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/BA-A60	5E26S	Day/Night Sensor LED A60 Lamp	525 lm	5W	E27	220°	 6000K	108mm x 60mm	50
E/BA-A60	5B6S	Day/Night Sensor LED A60 Lamp	525 lm	5W	B22	220°	 6000K	108mm x 60mm	50

LED General Purpose A60 Lamp [12V] Non-Dimmable - Opal - 3 Year Guarantee



Home application with 12V supply.
Can be used with a 12V battery. Suitable for Caravans, Boats etc.
High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Wattage



Available Caps



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/BA-A60	5E26D	12V LED A60 Lamp	525 lm	5W	E27	220°	6000K	108mm x 60mm	50
E/BA-A60	5B6D	12V LED A60 Lamp	525 lm	5W	B22	220°	6000K	108mm x 60mm	50

LED A60 Colour Lamp [230V 50Hz] Non-Dimmable - 3 Year Guarantee



Wattage



Available Caps



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XLED-A606	ESB	Colour LED A60 Lamp	N/A	5W	E27	220°	 Blue	109mm x 60mm	50
XLED-A606	ESG	Colour LED A60 Lamp	N/A	5W	E27	220°	 Green	109mm x 60mm	50
XLED-A606	ESO	Colour LED A60 Lamp	N/A	5W	E27	220°	 Yellow	109mm x 60mm	50
XLED-A606	ESR	Colour LED A60 Lamp	N/A	5W	E27	220°	 Red	109mm x 60mm	50
XLED-A606	BCB	Colour LED A60 Lamp	N/A	5W	B22	220°	 Blue	109mm x 60mm	50
XLED-A606	BCG	Colour LED A60 Lamp	N/A	5W	B22	220°	 Green	109mm x 60mm	50
XLED-A606	BCO	Colour LED A60 Lamp	N/A	5W	B22	220°	 Yellow	109mm x 60mm	50
XLED-A606	BCR	Colour LED A60 Lamp	N/A	5W	B22	220°	 Red	109mm x 60mm	50

LED GU10 & MR16 Lamps - 38° [230V 50Hz] Non-Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Wattages



Available Caps



SMD LED GU10 Lamp



SMD LED MR16 Lamp

TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XLED3	3G3	COB	SMD LED GU10 Lamp	315 lm	3W	GU10	38°	3000K	52mm x 50mm	100
E/XLED3	3G4	COB	SMD LED GU10 Lamp	315 lm	3W	GU10	38°	4000K	52mm x 50mm	100
E/XLED3	3G6	COB	SMD LED GU10 Lamp	315 lm	3W	GU10	38°	6000K	52mm x 50mm	100
E/BA/XSMD5	4G3	COB	SMD LED GU10 Lamp	420 lm	4W	GU10	38°	3000K	52mm x 50mm	100
E/BA/XSMD5	4G4	COB	SMD LED GU10 Lamp	420 lm	4W	GU10	38°	4000K	52mm x 50mm	100
E/BA/XSMD5	4G6	COB	SMD LED GU10 Lamp	420 lm	4W	GU10	38°	6000K	52mm x 50mm	100
E/XLED5	5G3	COB	SMD LED GU10 Lamp	525 lm	5W	GU10	38°	3000K	52mm x 50mm	100
E/XLED5	5G4	COB	SMD LED GU10 Lamp	525 lm	5W	GU10	38°	4000K	52mm x 50mm	100
E/XLED5	5G6	COB	SMD LED GU10 Lamp	525 lm	5W	GU10	38°	6000K	52mm x 50mm	100
E/XLED3	3M3	COB	SMD LED MR16 Lamp	315 lm	3W	MR16	38°	3000K	52mm x 50mm	100
E/XLED3	3M4	COB	SMD LED MR16 Lamp	315 lm	3W	MR16	38°	4000K	52mm x 50mm	100
E/XLED3	3M6	COB	SMD LED MR16 Lamp	315 lm	3W	MR16	38°	6000K	52mm x 50mm	100
E/XLED5	5M3	COB	SMD LED MR16 Lamp	525 lm	5W	MR16	38°	3000K	52mm x 50mm	100
E/XLED5	5M4	COB	SMD LED MR16 Lamp	525 lm	5W	MR16	38°	4000K	52mm x 50mm	100
E/XLED5	5M6	COB	SMD LED MR16 Lamp	525 lm	5W	MR16	38°	6000K	52mm x 50mm	100

LED GU10 Lamps - 120° [230V 50Hz] Non-Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Wattages



Cap



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XSMD3	3G3	Frosted	SMD LED GU10 Lamp	315 lm	3W	GU10	120°	 3000K	52mm x 50mm	100
E/XSMD3	3G4	Frosted	SMD LED GU10 Lamp	315 lm	3W	GU10	120°	 4000K	52mm x 50mm	100
E/XSMD3	3G6	Frosted	SMD LED GU10 Lamp	315 lm	3W	GU10	120°	 6000K	52mm x 50mm	100
E/XSMD5	5G3	Frosted	SMD LED GU10 Lamp	525 lm	5W	GU10	120°	 3000K	52mm x 50mm	100
E/XSMD5	5G4	Frosted	SMD LED GU10 Lamp	525 lm	5W	GU10	120°	 4000K	52mm x 50mm	100
E/XSMD5	5G6	Frosted	SMD LED GU10 Lamp	525 lm	5W	GU10	120°	 6000K	52mm x 50mm	100

LED GU10 Lamps - 38° [230V 50Hz] Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours
Dimmer Type: Use with Shuttle trailing edge dimmer (SDIM-T-LED-500W)



Wattages



Cap



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XLED5	5G3DM	COB	Dimmable SMD LED GU10 Lamp	525 lm	5W	GU10	38°	3000K	52mm x 50mm	100
E/XLED5	5G4DM	COB	Dimmable SMD LED GU10 Lamp	525 lm	5W	GU10	38°	4000K	52mm x 50mm	100
E/XLED5	5G6DM	COB	Dimmable SMD LED GU10 Lamp	525 lm	5W	GU10	38°	6000K	52mm x 50mm	100

LED GU10 Lamps - 120° [230V 50Hz] Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours
Dimmer Type: Use with Shuttle trailing edge dimmer (SDIM-T-LED-500W)



Wattage



Cap



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XSMD5	5G4DM	Frosted	Dimmable SMD LED GU10 Lamp	525 lm	5W	GU10	120°	4000K	52mm x 50mm	100

FLASH™

LED Lamps

LED GU10 Lamps [230V 50Hz] 3-Step Dimmable - 3 Year Guarantee



Convert any room to dimmable by replacing lamps with 3-Step dimmable lamps.
No electrician, no electrical components, no dimmer required.
High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Wattage



Switch off/on to change the brightness level of the lamp



Step 1
Brightness 100%

Step 2
Brightness 60%

Step 3
Brightness 20%

TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XLED5	5G33DM	COB	3-Step Dimmable SMD LED GU10 Lamp	525 lm	5W	GU10	38°	3000K	52mm x 50mm	100
E/XLED5	5G43DM	COB	3-Step Dimmable SMD LED GU10 Lamp	525 lm	5W	GU10	38°	4000K	52mm x 50mm	100
E/XLED5	5G63DM	COB	3-Step Dimmable SMD LED GU10 Lamp	525 lm	5W	GU10	38°	6000K	52mm x 50mm	100

LED GU10 Lamps Colours [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Wattages

4W

6W

Cap

GU10

38°

3

YEAR

GUARANTEE



TECHNICAL SPECIFICATIONS

ITEM NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XSMD4W-GU10B	COB	Colour SMD LED GU10 Lamp	N/A	4W	GU10	38°	Blue	52mm x 50mm	100
XSMD4W-GU10G	COB	Colour SMD LED GU10 Lamp	N/A	4W	GU10	38°	Green	52mm x 50mm	100
XSMD4W-GU10R	COB	Colour SMD LED GU10 Lamp	N/A	4W	GU10	38°	Red	52mm x 50mm	100
XSMD6W-GU10B	COB	Colour SMD LED GU10 Lamp	N/A	6W	GU10	38°	Blue	52mm x 50mm	100
XSMD6W-GU10G	COB	Colour SMD LED GU10 Lamp	N/A	6W	GU10	38°	Green	52mm x 50mm	100
XSMD6W-GU10R	COB	Colour SMD LED GU10 Lamp	N/A	6W	GU10	38°	Red	52mm x 50mm	100

LED GU10 Lamps RGB [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Wattage

3W

Cap

GU10

38°

3

YEAR

GUARANTEE




TECHNICAL SPECIFICATIONS

ITEM NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XLED-GU10RGB	COB	RGB COB LED GU10 Lamp	N/A	3W	GU10	38°	RGB	61mm x 50mm	100

LED 3U Lamps [230V 50Hz] Non-Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Available Caps




TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XLED-3U5W	E26	Clear	LED 3U Lamp	525 lm	5W	E27	220°	6000K	110mm x 40mm	100
E/XLED-3U5W	B6	Clear	LED 3U Lamp	525 lm	5W	B22	220°	6000K	110mm x 40mm	100
E/XLED-3U9W	E26	Clear	LED 3U Lamp	945 lm	9W	E27	220°	6000K	110mm x 40mm	100
E/XLED-3U9W	B6	Clear	LED 3U Lamp	945 lm	9W	B22	220°	6000K	110mm x 40mm	100

LED Full Spiral Lamps - Frosted [230V 50Hz] Non-Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours

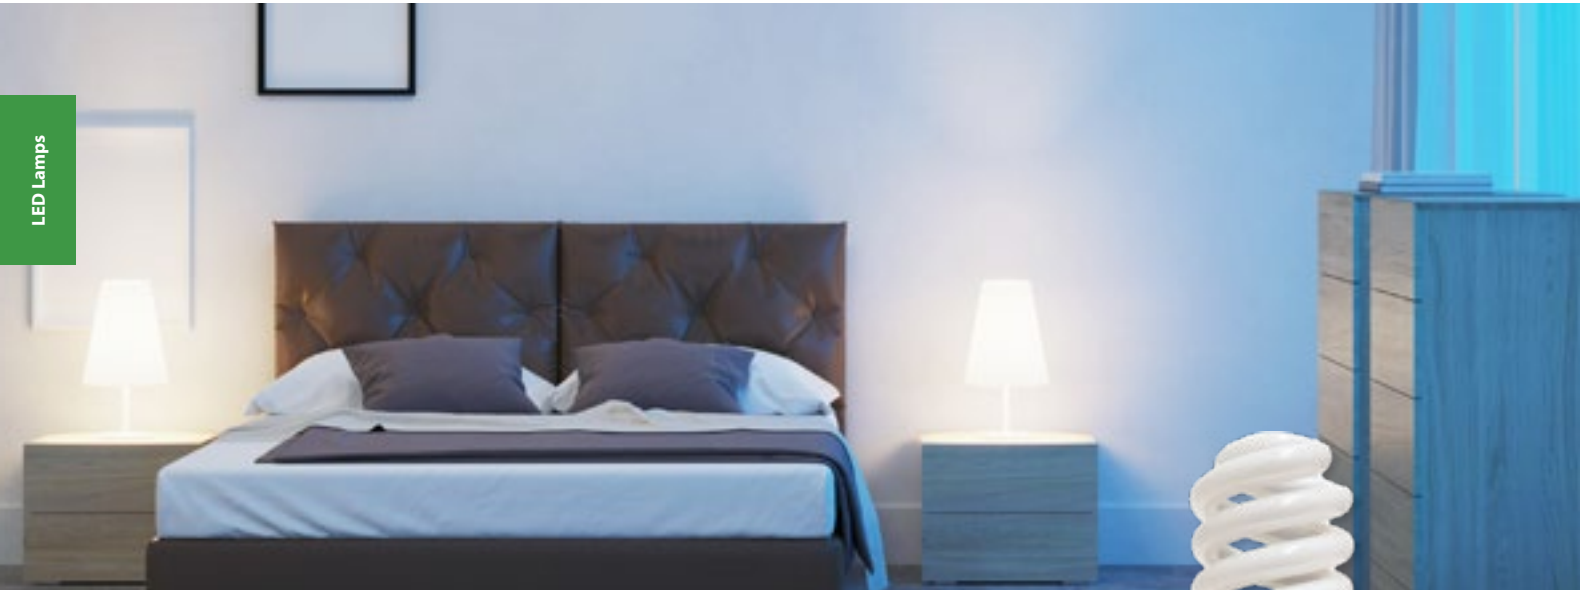

Wattages

20W

36W

Available Caps



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XLED-20WFS	E26F	Frosted	LED Full Spiral Lamp	1800 lm	20W	E27	220°	6000K	170mm x 60mm	50
E/XLED-20WFS	B6F	Frosted	LED Full Spiral Lamp	1800 lm	20W	B22	220°	6000K	170mm x 60mm	50
E/XLED-36WFS	B6F	Frosted	LED Full Spiral Lamp	3780 lm	36W	B22	220°	6000K	205mm x 75mm	50
E/XLED-36WFS	E46F	Frosted	LED Full Spiral Lamp	3780 lm	36W	E40	220°	6000K	290mm x 85mm	50

LED Full Spiral Lamps - Clear [230V 50Hz] Non-Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours

LED Lamps



Wattages

5W

12W

20W

36W

Available Caps

E14

E27

B22

E40



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XLED-5FS	E26	Clear	LED Full Spiral Lamp	525 lm	5W	E27	220°	6000K	103mm x 50mm	100
E/XLED-5FS	B6	Clear	LED Full Spiral Lamp	525 lm	5W	B22	220°	6000K	103mm x 50mm	100
E/XLED-9FS	9E16	Clear	LED Full Spiral Lamp	945 lm	9W	E14	220°	6000K	115mm x 50mm	100
E/XLED-9FS	9E26	Clear	LED Full Spiral Lamp	945 lm	9W	E27	220°	6000K	115mm x 50mm	100
E/XLED-9FS	9B6	Clear	LED Full Spiral Lamp	945 lm	9W	B22	220°	6000K	115mm x 50mm	100
E/XLED-12WFS	E26	Clear	LED Full Spiral Lamp	1260 lm	12W	E27	220°	6000K	160mm x 60mm	50
E/XLED-12WFS	B6	Clear	LED Full Spiral Lamp	1260 lm	12W	B22	220°	6000K	160mm x 60mm	50
E/XLED-20WFS	E26	Clear	LED Full Spiral Lamp	2100 lm	20W	E27	220°	6000K	205mm x 75mm	50
E/XLED-20WFS	B6	Clear	LED Full Spiral Lamp	2100 lm	20W	B22	220°	6000K	205mm x 75mm	50
E/XLED-36WFS	E26	Clear	LED Full Spiral Lamp	3780 lm	36W	E27	220°	6000K	212mm x 77mm	50
E/XLED-36WFS	E46	Clear	LED Full Spiral Lamp	3780 lm	36W	E40	220°	6000K	212mm x 77mm	50

LED C35 Candle Lamps [230V 50Hz] Non-Dimmable - Opal - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XECO-CAN001	3E13	LED Candle Lamp	315 lm	3W	E14	220°	3000K	99mm x 36mm	100
E/XECO-CAN001	3E14	LED Candle Lamp	315 lm	3W	E14	220°	4000K	99mm x 36mm	100
E/XECO-CAN001	3E16	LED Candle Lamp	315 lm	3W	E14	220°	6000K	99mm x 36mm	100
E/XECO-CAN001	3E23	LED Candle Lamp	315 lm	3W	E27	220°	3000K	99mm x 36mm	100
E/XECO-CAN001	3E24	LED Candle Lamp	315 lm	3W	E27	220°	4000K	99mm x 36mm	100
E/XECO-CAN001	3E26	LED Candle Lamp	315 lm	3W	E27	220°	6000K	99mm x 36mm	100
E/XECO-CAN001	3B3	LED Candle Lamp	315 lm	3W	B22	220°	3000K	99mm x 36mm	100
E/XECO-CAN001	3B4	LED Candle Lamp	315 lm	3W	B22	220°	4000K	99mm x 36mm	100
E/XECO-CAN001	3B6	LED Candle Lamp	315 lm	3W	B22	220°	6000K	99mm x 36mm	100
E/XECO-CC01	5E13	LED Candle Lamp	525 lm	5W	E14	220°	3000K	99mm x 36mm	100
E/XECO-CC01	5E14	LED Candle Lamp	525 lm	5W	E14	220°	4000K	99mm x 36mm	100
E/XECO-CC01	5E16	LED Candle Lamp	525 lm	5W	E14	220°	6000K	99mm x 36mm	100
E/XECO-CC01	5E23	LED Candle Lamp	525 lm	5W	E27	220°	3000K	99mm x 36mm	100
E/XECO-CC01	5E24	LED Candle Lamp	525 lm	5W	E27	220°	4000K	99mm x 36mm	100
E/XECO-CC01	5E26	LED Candle Lamp	525 lm	5W	E27	220°	6000K	99mm x 36mm	100
E/XECO-CC01	5B3	LED Candle Lamp	525 lm	5W	B22	220°	3000K	99mm x 36mm	100
E/XECO-CC01	5B4	LED Candle Lamp	525 lm	5W	B22	220°	4000K	99mm x 36mm	100
E/XECO-CC01	5B6	LED Candle Lamp	525 lm	5W	B22	220°	6000K	99mm x 36mm	100

LED C35 Candle Lamps [230V 50Hz] Dimmable - Opal - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours
Dimmer Type: Use with Shuttle trailing edge dimmer (SDIM-T-LED-500W)



LED Lamps



Wattage



Cap



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XECO-CC01	5E13DM	Dimmable LED Candle Lamp	525 lm	5W	E14	220°	3000K	100mm x 37mm	100
E/XECO-CC01	5E16DM	Dimmable LED Candle Lamp	525 lm	5W	E14	220°	6000K	100mm x 37mm	100

LED G45 Golfball Lamps [230V 50Hz] Non-Dimmable - Opal - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Wattages



Available Caps



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XECO3	3E13	LED Golf Ball Lamp	315 lm	3W	E14	220°	 3000K	80mm x 45mm	100
E/XECO3	3E16	LED Golf Ball Lamp	315 lm	3W	E14	220°	 6000K	80mm x 45mm	100
E/XECO3	3E23	LED Golf Ball Lamp	315 lm	3W	E27	220°	 3000K	80mm x 45mm	100
E/XECO3	3E24	LED Golf Ball Lamp	315 lm	3W	E27	220°	 4000K	80mm x 45mm	100
E/XECO3	3E26	LED Golf Ball Lamp	315 lm	3W	E27	220°	 6000K	80mm x 45mm	100
E/XECO3	3B3	LED Golf Ball Lamp	315 lm	3W	B22	220°	 3000K	80mm x 45mm	100
E/XECO3	3B6	LED Golf Ball Lamp	315 lm	3W	B22	220°	 6000K	80mm x 45mm	100
E/XECO5	5E16	LED Golf Ball Lamp	525 lm	5W	E14	220°	 6000K	80mm x 45mm	100
E/XECO5	5E26	LED Golf Ball Lamp	525 lm	5W	E27	220°	 6000K	80mm x 45mm	100
E/XECO5	5B6	LED Golf Ball Lamp	525 lm	5W	B22	220°	 6000K	80mm x 45mm	100

LED Directional R50 Lamps [230V 50Hz] Non-Dimmable

3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Wattage



Cap



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XECO-CAN001	5R5E13	LED R50 Directional Lamp	525 lm	5W	E14	110°	3000K	85mm x 50mm	100
E/XECO-CAN001	5R5E16	LED R50 Directional Lamp	525 lm	5W	E14	110°	6000K	85mm x 50mm	100

LED Directional R63 Lamps [230V 50Hz] Non-Dimmable

3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Wattage



Cap



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XECO-CAN001	5R6E26	LED R63 Directional Lamp	525 lm	5W	E27	110°	6000K	106mm x 63mm	100



LED Pygmy Lamp [230V 50Hz] Non-Dimmable - 3 Year Guarantee



Wattage

2W



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XSMD-PYGMYD	LED Pygmy Lamp	105 lm	1W	E14	220°	6000K	55mm x 25mm	100

LED G4 Lamps [230V 50Hz] Non-Dimmable - 3 Year Guarantee

LED Lamps



Wattage



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XLED-G4CW	LED G4 Lamp	180 lm	2W	G4	160°	3000K	37mm x 10mm	500
XLED-G4CC	LED G4 Lamp	180 lm	2W	G4	160°	4000K	37mm x 10mm	500
XLED-G4CD	LED G4 Lamp	180 lm	2W	G4	160°	6000K	37mm x 10mm	500

LED G9 Lamps [230V 50Hz] Dimmable - 3 Year Guarantee

Dimmer Type: Use with Shuttle trailing edge dimmer (SDIM-T-LED-500W)



Wattage



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XLED-G9DW	Dimmable LED G9 Lamp	180 lm	2W	G9	160°	3000K	48mm x 18mm	500
XLED-G9DC	Dimmable LED G9 Lamp	180 lm	2W	G9	160°	4000K	48mm x 18mm	500
XLED-G9DD	Dimmable LED G9 Lamp	180 lm	2W	G9	160°	6000K	48mm x 18mm	500

LED T8 Tubes [230V 50Hz] Non-Dimmable - 3 Year Guarantee



LED Lamps

Wattages

9W

18W

22W

Available As

FROSTED

CLEAR

T8



TECHNICAL SPECIFICATIONS

ITEM NUMBER	LAMP SHAPE	STYLE	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XLED-T80600F	T8	Frosted Glass	LED T8 Tube	800 lm	9W	4200K	600mm x 26mm	25
XLED-T80600D	T8	Frosted Glass	LED T8 Tube	800 lm	9W	6500K	600mm x 26mm	25
XLED-T80600C	T8	Clear Glass	LED T8 Tube	800 lm	9W	6500K	600mm x 26mm	25
XLED-T81200X	T8	Frosted Glass	LED T8 Tube	1600 lm	18W	6500K	1200mm x 26mm	25
XLED-T812006	T8	Clear Glass	LED T8 Tube	1600 lm	18W	6500K	1200mm x 26mm	25
XLED-T8120CX	T8	Frosted Glass	LED T8 Tube	1600 lm	18W	4200K	1200mm x 26mm	25
XLED-T8150XC	T8	Clear Glass	LED T8 Tube	2000 lm	22W	4200K	1500mm x 26mm	25

LED T8 Tubes Economy [230V 50Hz] Non-Dimmable - 1 Year Guarantee



LED Lamps

Wattages

9W

18W

22W

36W

Available As

FROSTED

CLEAR

T8



TECHNICAL SPECIFICATIONS

ITEM NUMBER	LAMP SHAPE	STYLE	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XECO-T80600C	T8	Frosted Glass	LED T8 Tube Economy	800 lm	9W	 4200K	600mm x 26mm	25
XECO-T80600D	T8	Frosted Glass	LED T8 Tube Economy	800 lm	9W	 6500K	600mm x 26mm	25
XECO-T81200C	T8	Frosted Glass	LED T8 Tube Economy	1600 lm	18W	 4200K	1200mm x 26mm	25
XECO-T81200D	T8	Frosted Glass	LED T8 Tube Economy	1600 lm	18W	 6500K	1200mm x 26mm	25
XLED-T812006	T8	Clear Glass	LED T8 Tube Economy	1600 lm	18W	 6500K	1200mm x 26mm	25
XECO-T81500C	T8	Frosted Glass	LED T8 Tube Economy	2000 lm	22W	 4200K	1500mm x 26mm	25
XECO-T81500D	T8	Frosted Glass	LED T8 Tube Economy	2000 lm	22W	 6500K	1500mm x 26mm	25
XECO-T81500DC	T8	Clear Glass	LED T8 Tube Economy	2000 lm	22W	 6500K	1500mm x 26mm	25
XECO-T82400D	T8	Frosted Glass	LED T8 Tube Economy	3200 lm	36W	 6500K	2400mm x 26mm	20

LED Decorative Filament Vintage Clear Glass Lamps [230V 50Hz] Dimmable- 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



LED Lamps

HIGH EFFICIENCY

More Light,
Less Electricity

Wattage

4W

Available Caps



Candle
Clear

A60
Clear

Pear Shape
Clear

TECHNICAL SPECIFICATIONS

ITEM NUMBER	LAMP SHAPE	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XLFC-GLS01W	A60	Clear Glass	Dimmable LED Filament Vintage Lamp	420 lm	4W	E27	2700K	106mm x 60mm	25
XLFC-4CANE14	C35	Clear Glass	Dimmable Candle LED Filament Vintage Lamp	420 lm	4W	E14	2700K	98mm x 35mm	50
XLFC-4CANE27	C35	Clear Glass	Dimmable Candle LED Filament Vintage Lamp	420 lm	4W	E27	2700K	98mm x 35mm	50
XLFC-4ST64W	ST64	Clear Glass	Dimmable Pear Shape LED Filament Vintage Lamp	420 lm	4W	E27	2700K	143mm x 64mm	25

LED Decorative Filament Vintage Clear Glass Lamps [230V 50Hz] Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



LED Lamps



Wattage

4W

Available Caps



Golf Ball
Clear



G95 Maxi
Clear




G125 Maxi
Clear

TECHNICAL SPECIFICATIONS

ITEM NUMBER	LAMP SHAPE	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XLFC-GB02	G45	Clear Glass	Dimmable Golf Ball LED Filament Vintage Lamp	420 lm	4W	E14	2700K	80mm x 45mm	50
XLFC-GB03	G45	Clear Glass	Dimmable Golf Ball LED Filament Vintage Lamp	420 lm	4W	B22	2700K	80mm x 45mm	50
XLFC-G95B22W	G95	Clear Glass	Dimmable Maxi LED Filament Vintage Lamp	420 lm	4W	B22	2700K	136mm x 95mm	20
XLFC-G95E27W	G95	Clear Glass	Dimmable Maxi LED Filament Vintage Lamp	420 lm	4W	E27	2700K	136mm x 95mm	20
XLFC-G125ESC	G125	Clear Glass	Dimmable Maxi LED Filament Vintage Lamp	420 lm	4W	E27	2700K	176mm x 125mm	20

LED Decorative Filament Vintage Amber/Frosted Glass Lamps [230V 50Hz] Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours

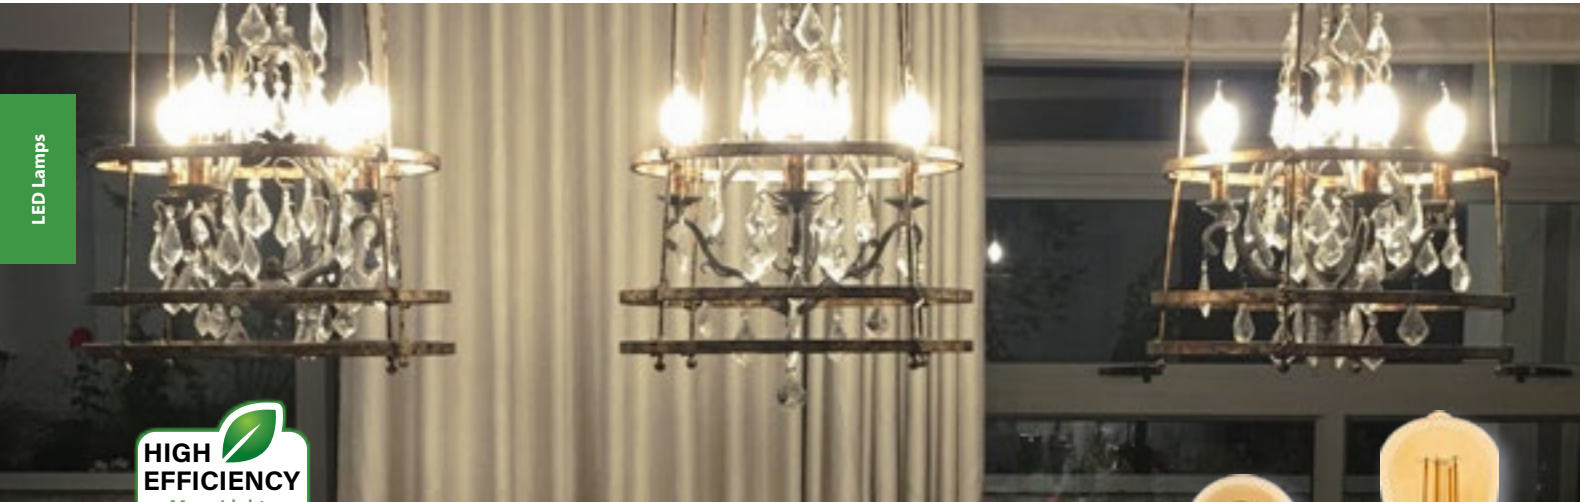

LED Lamps



Wattage



Available Caps



Candle
Frosted



Candle
Amber



A60
Amber



Pear Shape
Amber

TECHNICAL SPECIFICATIONS

ITEM NUMBER	LAMP SHAPE	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XLFC-CANB22A	C35	Amber	LED Filament Vintage Lamp	420 lm	4W	B22	2700K	98mm x 35mm	50
XLFC-CANE14A	C35	Amber	LED Candle Filament Vintage Lamp	420 lm	4W	E14	2700K	98mm x 35mm	50
XLFC-CANE27A	C35	Amber	LED Candle Filament Vintage Lamp	420 lm	4W	E27	2700K	98mm x 35mm	50
XLFC-CANE14W	C35	Frosted	LED Candle Filament Vintage Lamp	420 lm	4W	E14	2700K	98mm x 35mm	50
XLFC-A60E27A	A60	Amber	LED A60 Filament Vintage Lamp	420 lm	4W	E27	2700K	105mm x 60mm	50

LED Decorative Filament Vintage Amber Glass Lamps [230V 50Hz] Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



LED Lamps



Wattage

4W

Available Caps



Tear-drop
Amber



G95 Maxi
Amber



G125 Maxi
Amber

TECHNICAL SPECIFICATIONS

ITEM NUMBER	LAMP SHAPE	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
XLFC-CANT01A	C35	Amber	LED Tear-drop Filament Vintage Lamp	420 lm	4W	E14	 2700K	120mm x 35mm	100
XLFC-ST64ESA	ST64	Amber	LED Pear Shape Filament Vintage Lamp	420 lm	4W	E27	 2700K	140mm x 64mm	100
XLFC-G95E27A	G95	Amber	LED Maxi Filament Vintage Lamp	420 lm	4W	E27	 2700K	136mm x 95mm	20
XLFC-G125ESA	G125	Amber	LED Maxi Filament Vintage Lamp	420 lm	4W	E27	 2700K	176mm x 125mm	20

LED Kits For Metal Base [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Use With Flash Metal Base Fittings



Available Wattages

10W

15W

18W

30W



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	W x D (MM)	PCS/ CRT
BL/SCK10D	LED Kit [For Metal Base Fittings]	750 lm	10W	5000K	116mm x 28mm	60
BL/SCK15D	LED Kit [For Metal Base Fittings]	1200 lm	15W	5000K	150mm x 30mm	60
BL/SCK18D	LED Kit [For Metal Base Fittings]	1350 lm	18W	6000K	153mm x 23mm	60
BL/SCK32D	LED Kit [For Metal Base Fittings]	2250 lm	30W	6000K	230mm x 30mm	60

LED Emergency Kit For Metal Base [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Light stays ON during power failure

Emergency: 150 Lumen
Working time: 2 Hours
Charging time: 5 - 6 hours

Wattage

15W



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	WIDTH (MM)	PCS/ CRT
BL/SCK15EMD	LED Emergency Kit	1125 lm	15W	6000K	175mm x 26mm	60
BL/SCK15EMW	LED Emergency Kit	1125 lm	15W	3000K	175mm x 26mm	60

LED T-Bulb [230V 50Hz] Non-Dimmable · 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Available Wattages

- 20W
- 30W
- 40W
- 50W

Available Caps

- E27
- B22




TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	LAMP SHAPE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E-BL-TA020	20E26	T80	LED T-Bulb	2100 lm	20W	E27	270°	6000K	136mm x 80mm	100
E-BL-TA020	20B6	T80	LED T-Bulb	2100 lm	20W	B22	270°	6000K	136mm x 80mm	100
E-BL-TA030	30E26	T100	LED T-Bulb	3150 lm	30W	E27	270°	6000K	167mm x 100mm	50
E-BL-TA030	30B6	T100	LED T-Bulb	3150 lm	30W	B22	270°	6000K	167mm x 100mm	50
E-BL-TA040	40E26	T112	LED T-Bulb	4200 lm	40W	E27	270°	6000K	194mm x 112mm	30
E-BL-TA050	50E26	T126	LED T-Bulb	5250 lm	50W	E27	270°	6000K	216mm x 126mm	30

LED T36 **Stick Lamps** [230V 50Hz] Non-Dimmable - 3 Year Guarantee

LED Lamps

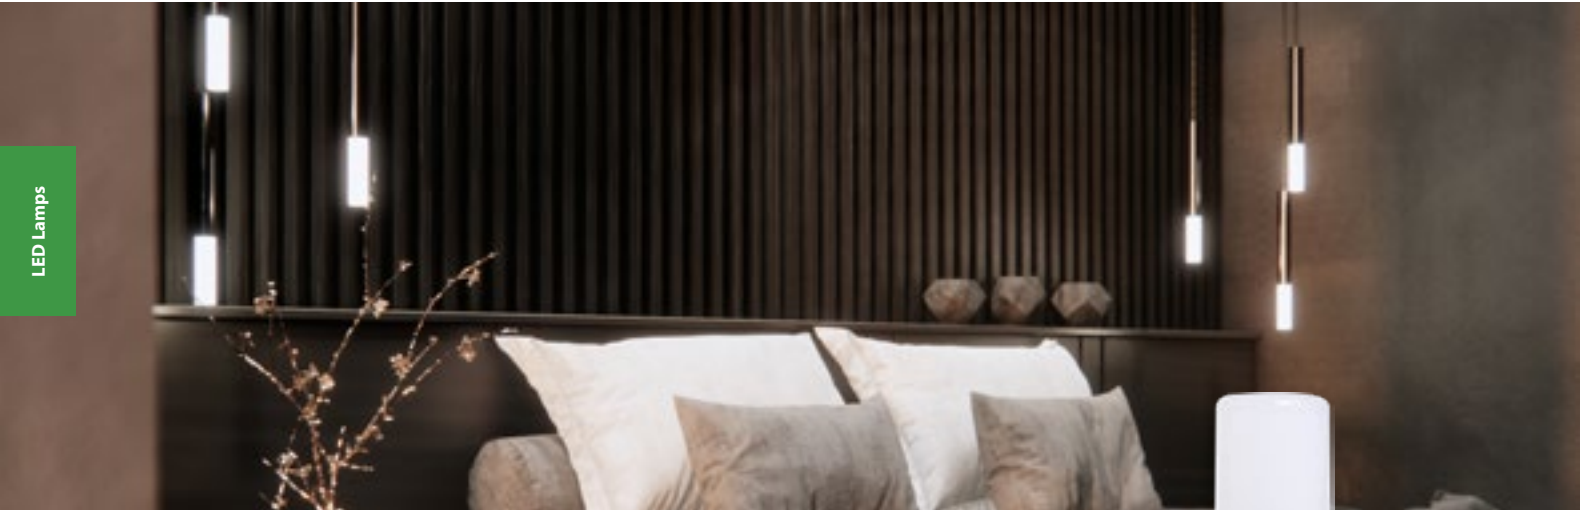

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours



Wattages




Available Caps



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	LAMP SHAPE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	PCS/ CRT
E/XLED-T36-5	5E16	T36	LED Stick Lamp	525 lm	5W	E14	220°	 6000K	120mm x 33mm	100
E/XLED-T36-5	5B6	T36	LED Stick Lamp	525 lm	5W	B22	220°	 6000K	120mm x 33mm	100
E/XLED-T36-5	5B3	T36	LED Stick Lamp	525 lm	5W	B22	220°	 3000K	120mm x 33mm	100
E/XLED-T36-5	5E26	T36	LED Stick Lamp	525 lm	5W	E27	220°	 6000K	120mm x 33mm	100
E/XLED-T36-5	5E23	T36	LED Stick Lamp	525 lm	5W	E27	220°	 3000K	120mm x 33mm	100
E/XLED-T36-9	9B6	T36	LED Stick Lamp	945 lm	9W	B22	220°	 6000K	120mm x 32mm	100
E/XLED-T36-9	9E26	T36	LED Stick Lamp	945 lm	9W	E27	220°	 6000K	120mm x 32mm	100

LED Axis Lamps [230V 50Hz] Non-Dimmable - 3 Year Guarantee

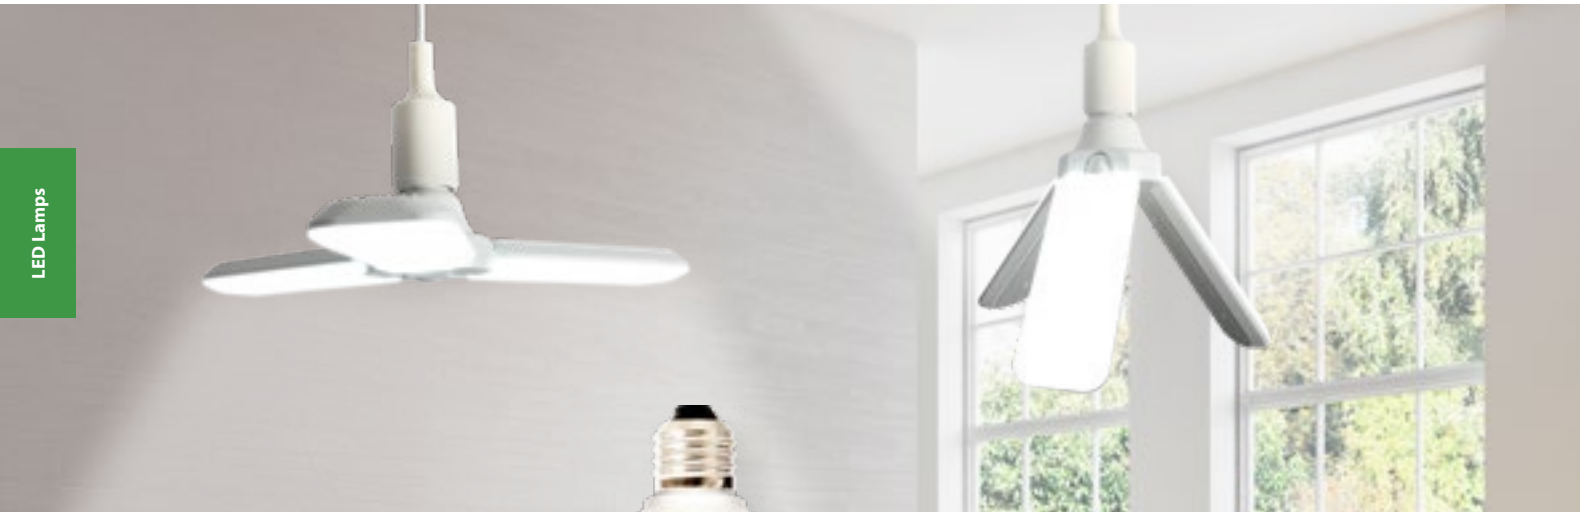

LED Lamps


Wattage

50W

Cap



Adjustable Design | Multi-functional
Easily twist & fold blades
to suit application




TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	SURGE PROTECTION	L X W (MM)	FOLDED (mm)	IP RATING	PCS/ CRT
BL/4A50WDL	Axis LED Lamp • 4 Blades	3750 lm	50W	E27	6000K	2KV	230mm x 400mm	90mm	IP20	25

LED Directional PAR38 Lamps [230V 50Hz] Non-Dimmable - 3 Year Guarantee

High efficiency of 105 lm/W with a rated lifespan of 15,000 hours

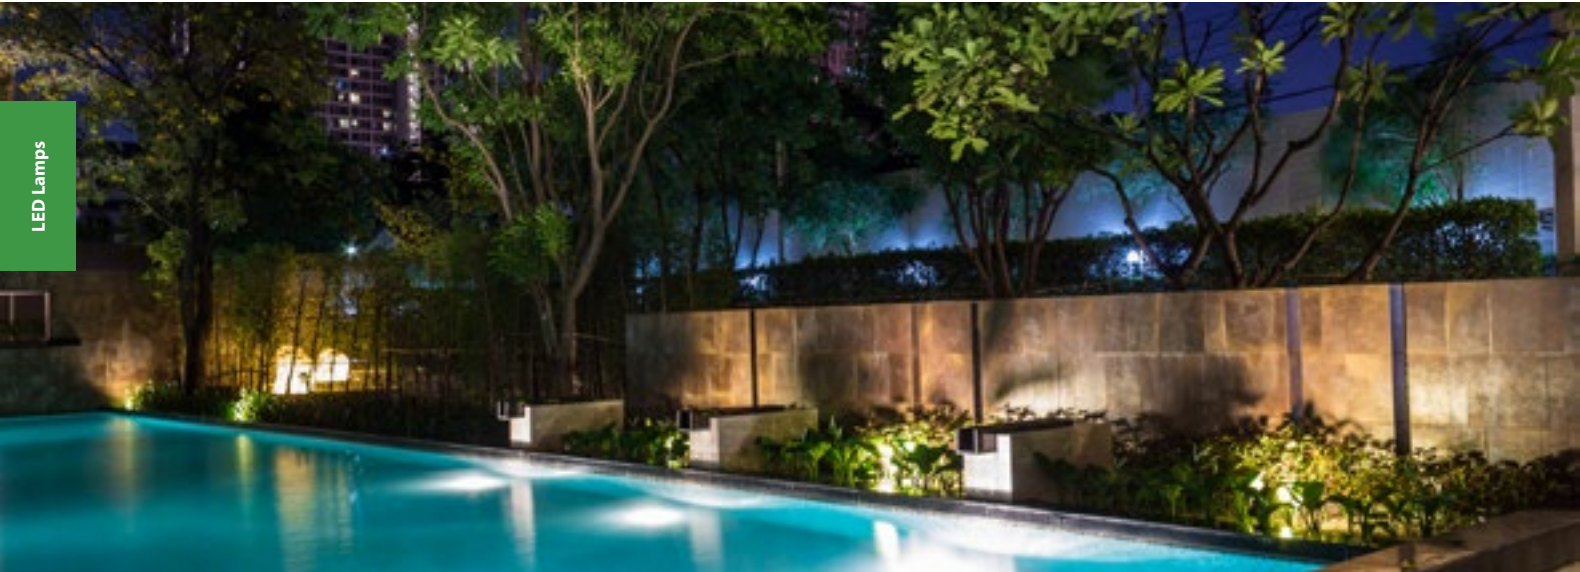

Wattage



Cap



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L X W (MM)	IP RATING	PCS/ CRT
E/XLED-T36-5	5PE26	LED PAR38 Directional Lamp	525 lm	5W	E27	120°	6000K	133mm x 120mm	IP65	30

LED High Bay Lamps [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Energy Efficient & Long Life
Replacing Standard Highbay Lamps:

- Metal Halide Lamps (MH)
- High Pressure Sodium Lamps (HPS)
- Fluorescent Lamps

Do Not Use with Reflectors

Wattages

100W

150W

Cap

E40

3

YEAR



TECHNICAL SPECIFICATIONS

ITEM NUMBER	LAMP SHAPE	DESCRIPTION	LUMEN	WATTAGE	CAP	BEAM ANGLE	COLOUR TEMPERATURE	L x W (mm)	PCS/CRT
XLED-M98/100	M98	High Bay LED Lamp	7500 lm	100W	E40	200°	6000K	275mm x 190mm	20
XLED-HAL150W	M98	High Bay LED Lamp	11250 lm	150W	E40	270°	6000K	290mm x 150mm	10

LED Integrated UFO High Bay Lamps
[230V 50Hz] Non-Dimmable - 3 Year Guarantee

Energy Efficient & Long Life
Replacing Standard Highbay Lamps:

- Metal Halide Lamps (MH)
- High Pressure Sodium Lamps (HPS)
- Fluorescent Lamps

Wattages

150W

200W

3

YEAR



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	REFLECTOR	COLOUR TEMPERATURE	SURGE PROTECTION	L x W (mm)	IP RATING	PCS/CRT
BL/UFO150W	LED Integrated UFO High Bay Lamp	11250 lm	150W	N/A	6000K	4KV	320mm x 160mm	IP65	1
BL/UFO200W	LED Integrated UFO High Bay Lamp	15000 lm	200W	N/A	6000K	4KV	360mm x 180mm	IP65	1

LED Recessed Panel Light [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required

Indoor

Wattages

3W

6W

9W

12W

18W



LED Recessed Panel Light Round

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE		MATERIAL	COLOUR	WIDTH (mm)	CUT OUT	PCS/ CRT
BL/PLR-10DL	LED Recessed Panel Light • Round	225 lm	3W		6000K	Aluminium	White	84mm	70mm	50
BL/PLR-6DL	LED Recessed Panel Light • Round	450 lm	6W		6000K	Aluminium	White	120mm	110mm	40
BL/PLR-12DL	LED Recessed Panel Light • Round	675 lm	9W		6000K	Aluminium	White	145mm	130mm	30
BL/PLR-15DL	LED Recessed Panel Light • Round	900 lm	12W		6000K	Aluminium	White	170mm	155mm	30
BL/PLR-15WW	LED Recessed Panel Light • Round	900 lm	12W		3000K	Aluminium	White	170mm	155mm	30
BL/PLR-20DL	LED Recessed Panel Light • Round	1400 lm	18W		6000K	Aluminium	White	225mm	205mm	20
BL/PLR-20WW	LED Recessed Panel Light • Round	1400 lm	18W		3000K	Aluminium	White	225mm	205mm	20

LED Recessed Panel Lights • Flexi Range
[230V 50Hz] Non-Dimmable - 3 Year Guarantee

Adjustable Cut-Hole Clips • Adjust Clips to Fit Hole Size
Integrated LED Light
No Additional Lamp Required
Driver Included



Round LED Panel Light



Square LED Panel Light

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	WIDTH (mm)	CUT OUT	PCS/CRT
BL/D109R06WD	LED Recessed Panel Lights • Flexi Range • Round	360 lm	6W	6000K	Aluminium • PC	White	100mm	45mm - 55mm	100
BL/D110S06WD	LED Recessed Panel Lights • Flexi Range • Square	360 lm	6W	6000K	Aluminium • PC	White	100mm x 100mm	45mm - 55mm	100

LED Backlit Panel Lights
[230V 50Hz] Non-Dimmable
- 1 Year Guarantee

Integrated LED Light
No Additional
Lamp Required



LED Backlit Panel Light • Square



LED Backlit Panel Light • Rectangle

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L X W (mm)	CUT OUT	PCS/CRT
BL-PBK40W	LED Backlit Panel Light • Square	3000 lm	40W	6000K	Aluminium • PC	White	595mm x 595mm	600 x 600mm	10
BL/PBK40W3CCT	LED Backlit Panel Light • Square	4000 lm	40W	3CCT	Aluminium • PC	White	595mm x 595mm	600 x 600mm	1
BL-PBK60W	LED Backlit Panel Light • Rectangle	4500 lm	60W	6000K	Aluminium • PC	White	595mm x 1195mm	600 x 1200mm	10
BL-PBK60W-CW	LED Backlit Panel Light • Rectangle	4500 lm	60W	4000K	Aluminium • PC	White	595mm x 1195mm	600 x 1200mm	1

LED Backlit Panel Lights [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required



Indoor

Wattages

4W

6W

12W



LED Backlit Panel Light
Round

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	DIAMETER x H(mm)	CUT OUT	PCS/CRT
BL/MB004-6W	LED Backlit Panel Lights • Round	360 lm	4W	6000K	PC • Opal	White	98mm x 27mm	75mm	100
BL/MB014-6W	LED Backlit Panel Lights • Round	540 lm	6W	6000K	PC • Opal	White	120mm x 28mm	92mm	90
BL/MB014-12W	LED Backlit Panel Lights • Round	1080 lm	12W	6000K	PC • Opal	White	144mm x 27mm	115mm	60
BL/MB014-18W	LED Backlit Panel Lights • Round	1350 lm	18W	6000K	PC • Opal	White	225mm x 28mm	180mm	-

LED Surface Mounted Panel Lights [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required

Indoor

Available As

Round

Square



LED Surface Mounted
Panel Light • Round



LED Surface Mounted
Panel Light • Square

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L x W (mm)	PCS/CRT
BL/PLSR-12DL	LED Surface Mounted Panel Light • Round	900 lm	12W	6000K	Aluminium	White	162mm	50
BL/PLSR-18DL	LED Surface Mounted Panel Light • Round	1350 lm	18W	6000K	Aluminium	White	210mm	20
BL/PLSS-12DL	LED Surface Mounted Panel Light • Square	900 lm	12W	6000K	Aluminium	White	162mm x 162mm	50
BL/PLSS-18DL	LED Surface Mounted Panel Light • Square	1350 lm	18W	6000K	Aluminium	White	210mm x 210mm	50

LED 3 in 1 Downlight Kit [230V 50Hz] Non-Dimmable - 3 Year Guarantee

LED GU10 Lamp + Downlight Fitting + Lampholder
[Lamp Body & Lens Style May Vary]



White • ABS
DL/3IN1-DF



Black • ABS
DL/3IN1-DB



Polished Brass • Steel
DL/3IN1-DPBRs



Satin Chrome • Steel
DL/3IN1-DSCHR



Wattage



TECHNICAL SPECIFICATIONS

ITEM NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	FIXED / TILT	FITTING	DIAMETER	L X W (MM)	PCS/CRT
DL/3IN1-DF	Frosted	3 in 1 Downlight Kit	315 lm	3W	GU10	6000K	Tilt [Adjustable]	White ABS	95mm	52mm x 50mm	100
DL/3IN1-DB	Frosted	3 in 1 Downlight Kit	315 lm	3W	GU10	6000K	Tilt [Adjustable]	Black ABS	95mm	52mm x 50mm	100
DL/3IN1-DPBRs	Frosted	3 in 1 Downlight Kit	315 lm	3W	GU10	6000K	Fixed [Straight]	Polished Brass Steel	80mm	52mm x 50mm	100
DL/3IN1-DSCHR	Frosted	3 in 1 Downlight Kit	315 lm	3W	GU10	6000K	Fixed [Straight]	Satin Chrome Steel	80mm	52mm x 50mm	100

LED 3 in 1 Downlight Kit Value Pack [230V 50Hz] Non-Dimmable - 3 Year Guarantee

10 x LED GU10 Lamps + 10 x Downlight Fittings + 10 x Lampholders
[Lamp Body & Lens Style May Vary]

Indoor



White • ABS
DL/3IN1VP-DF



Wattage



TECHNICAL SPECIFICATIONS

ITEM NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	FIXED / TILT	FITTING	DIAMETER	L X W (MM)	PCS/CRT
DL/3IN1VP-DF	Frosted	3 in 1 Downlight Kit Value Pack	315 lm	3 W	GU10	6000K	Tilt [Adjustable]	White ABS	95mm	52mm x 50mm	20

Recessed Downlights - 3 Year Guarantee

Recommended Lamp [Excluded]: Flash 38° GU10 LED Lamp / Flash GU10 Lampholder
Cabinet Downlight Recommended Lamp [Excluded]: Flash G4 LED Bi-Pin

Indoor



Fixed [Straight]
Aluminium
DL00B/SCHR



Fixed [Straight]
Aluminium
DL00A/WHT



Tilt [Adjustable]
Aluminium
DL116/SCHR



Tilt [Adjustable]
Aluminium
DL01A/WHT



Tilt [Adjustable]
ABS
DL/RIS01W

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	MAX WATTAGE	LAMP HOLDER	MATERIAL	COLOUR	WIDTH (mm)	CUT OUT	PCS/CRT
DL00A/WHT	Fixed [Straight] Curved Rim Downlight	Round	Max 50W	N/A	Aluminium	White	78mm	60mm	100
DL00A/SCHR	Fixed [Straight] Curved Rim Downlight	Round	Max 50W	N/A	Aluminium	Satin Chrome	78mm	60mm	100
DL00B/WHT	Fixed [Straight] Twist-lock Downlight	Round	Max 50W	N/A	Aluminium	White	78mm	68mm	100
DL00B/SCHR	Fixed [Straight] Twist-lock Downlight	Round	Max 50W	N/A	Aluminium	Satin Chrome	78mm	68mm	100
DL01A/WHT	Tilt [Adjustable] Curved Rim Downlight	Round	Max 50W	N/A	Aluminium	White	82mm	72mm	100
DL01A/SCHR	Tilt [Adjustable] Curved Rim Downlight	Round	Max 50W	N/A	Aluminium	Satin Chrome	82mm	72mm	100
DL116/WHT	Tilt [Adjustable] Twist-lock Downlight	Round	Max 50W	N/A	Aluminium	White	94mm	78mm	100
DL116/SCHR	Tilt [Adjustable] Twist-lock Downlight	Round	Max 50W	N/A	Aluminium	Satin Chrome	94mm	78mm	100
DL/RIS01W	Tilt [Adjustable] Twist-lock Downlight	Round	Max 5W	GU10	ABS	White	95mm	76mm	200
DL/RIS01S	Tilt [Adjustable] Twist-lock Downlight	Round	Max 5W	GU10	ABS	Satin Chrome	95mm	76mm	200



**Tilt [Adjustable]
Steel
DL124/WHT**



**Fixed [Straight]
Steel
DL730/PBRS**



**Tilt [Adjustable]
Steel
DL831/SCHR**



**Fixed [Straight]
Steel
DL920/WHT**

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	MAX WATTAGE	LAMP HOLDER	MATERIAL	COLOUR	WIDTH (mm)	CUT OUT	PCS/CRT
DL124/WHT	Tilt [Adjustable] Downlight	Round	Max 50W	N/A	Steel	White	106mm	74mm	100
DL124/SCHR	Tilt [Adjustable] Downlight	Round	Max 50W	N/A	Steel	Satin Chrome	106mm	74mm	100
DL730/WHT	Fixed [Straight] Downlight	Round	Max 50W	GU10	Steel	White	84mm	60mm	100
DL730/SCHR	Fixed [Straight] Downlight	Round	Max 50W	GU10	Steel	Satin Chrome	84mm	60mm	100
DL730/PBRS	Fixed [Straight] Downlight	Round	Max 50W	GU10	Steel	Polished Brass	84mm	60mm	100
DL831/SCHR	Tilt [Adjustable] Downlight	Round	Max 50W	GU10	Steel	Satin Chrome	94mm	72mm	100
DL831/WHT	Tilt [Adjustable] Downlight	Round	Max 50W	GU10	Steel	White	94mm	72mm	100
DL920/SCHR	Fixed [Straight] Downlight	Round	Max 50W	N/A	Steel	Satin Chrome	80mm	55mm	100
DL920/WHT	Fixed [Straight] Downlight	Round	Max 50W	N/A	Steel	White	80mm	55mm	100
DL920-PBRS	Fixed [Straight] Downlight	Round	Max 50W	N/A	Steel	Polished Brass	80mm	55mm	100

Slim LED Batten Economy [230V 50Hz] Non-Dimmable - 1 Year Guarantee

Integrated LED Light | No Additional Lamp Required

Available As

0.6m

1.2m

1.5m



Slim LED Batten • Economy

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	BASE	DIFFUSER	COLOUR	L X W x D (mm)	IP	PCS/CRT
XECO/WL0600	Slim LED Batten • Economy	1350 lm	18W	6000K	Iron	PP	White	597mm x 60mm x 23mm	IP20	20
XECO/WL1200	Slim LED Batten • Economy	2700 lm	36W	6000K	Iron	PP	White	1187mm x 60mm x 23mm	IP20	20
XECO/WL1500	Slim LED Batten • Economy	3375 lm	45W	6000K	Iron	PP	White	1497mm x 60mm x 23mm	IP20	20

LED Undercounter Luminaires [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required

Available As

300mm

600mm

900mm

1.2m



LED T5 Undercounter Lamp

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	Size(mm)	PCS/CRT
BL/LEDT5-5W	LED T5 Undercounter Lamp	375 lm	5W	4000K	PC	White	300mm	25
BL/LEDT5-9W	LED T5 Undercounter Lamp	675 lm	9W	4000K	PC	White	600mm	25
BL/LEDT5-13W	LED T5 Undercounter Lamp	975 lm	13W	4000K	PC	White	900mm	25
BL/LEDT5-18W	LED T5 Undercounter Lamp	1350 lm	18W	4000K	PC	White	1200mm	25

Nova Track Light [230V 50Hz] Non-Dimmable • GU10 Lampholder - 3 Year Guarantee

2 Wire Track Adapter - Compatible with Flash Nova 2 Wire Track

Indoor



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MAX WATTAGE	LAMPHOLDER	COLOUR	IP RATING	MATERIAL	DIMENSIONS
BL/TL2W-B	Nova Track Light	7W	GU10	Black	IP20	Aluminium & ABS	N/A
BL/TL2W-W	Nova Track Light	7W	GU10	White	IP20	Aluminium & ABS	N/A
BL/TLP1M-B	Nova 2 Wire Track • 1m	N/A	N/A	Black	IP20	Copper, Aluminium & ABS	33mm x 1000mm x 19mm
BL/TLP1M-W	Nova 2 Wire Track • 1m	N/A	N/A	White	IP20	Copper, Aluminium & ABS	33mm x 1000mm x 19mm
BL/TLP2M-B	Nova 2 Wire Track • 2m	N/A	N/A	Black	IP20	Copper, Aluminium & ABS	33mm x 2000mm x 19mm
BL/TLP2M-W	Nova 2 Wire Track • 2m	N/A	N/A	White	IP20	Copper, Aluminium & ABS	33mm x 2000mm x 19mm
BL/TLA90-W	Nova Track 90° Corner Joint	N/A	N/A	White	IP20	Copper, Aluminium & ABS	64mm x 64mm x 16mm
BL/TLAT-B	Nova Track T Joint	N/A	N/A	Black	IP20	Copper, Aluminium & ABS	93mm x 64mm x 16mm
BL/TLAT-W	Nova Track T Joint	N/A	N/A	White	IP20	Copper, Aluminium & ABS	93mm x 64mm x 16mm
BL/TLAX-B	Nova Track X Joint	N/A	N/A	Black	IP20	Copper, Aluminium & ABS	93mm x 93mm x 16mm
BL/TLAX-W	Nova Track X Joint	N/A	N/A	White	IP20	Copper, Aluminium & ABS	93mm x 93mm x 16mm
BL/TLAS-B	Nova Track Straight Joint	N/A	N/A	Black	IP20	Copper, Aluminium & ABS	34mm x 93mm x 16mm
BL/TLAS-W	Nova Track Straight Joint	N/A	N/A	White	IP20	Copper, Aluminium & ABS	34mm x 93mm x 16mm

Spotlights [230V 50Hz] - 3 Year Guarantee

Recommended Lamp [Excluded]: Flash LED GU10 Lamp

Indoor

VENUS SPOTLIGHTS

1.



2.



3.



NORDIC SPOTLIGHTS

4.



5.



6.



7.



CLASSIC SPOTLIGHTS

8.



9.



10.



TECHNICAL SPECIFICATIONS

ITEM NUMBER	IMAGE NO.	DESCRIPTION	VOLTAGE	MAX WATTAGE	LAMP HOLDER	BODY MATERIAL	COLOUR	PCS/CRT
BL/71017	1	Venus - 1 Light Spotlight	230V 50Hz	35W	GU10	Steel	 Matt White	8
BL/73017-B	2	Venus - 3 Light Spotlight on a Bar	230V 50Hz	35W x 3	GU10 x 3	Steel	 Matt White	4
BL/73017-P	3	Venus - 3 Light Spotlight on a Plate	230V 50Hz	35W x 3	GU10 x 3	Steel	 Matt White	2
BL/71027-2	4	Nordic - 1 Light Spotlight	230V 50Hz	35W	GU10	Steel	 Matt White	8
BL/73027-B	5	Nordic - 3 Light Spotlight on a Bar	230V 50Hz	35W x 3	GU10 x 3	Steel	 Matt White	4
BL/73027-P	6	Nordic - 3 Light Spotlight on a Plate	230V 50Hz	35W x 3	GU10 x 3	Steel	 Matt White	2
BL/72027-2	7	Nordic - 2 Light Spotlight on a Bar	230V 50Hz	35W x 2	GU10 x 2	Steel	 Matt White	4
BL/71052	8	Classic - 1 Light Spotlight	230V 50Hz	35W	GU10	Steel & Glass	 Chrome	8
BL/73052-B	9	Classic - 3 Light Spotlight on a Bar	230V 50Hz	35W x 3	GU10 x 3	Steel & Glass	 Chrome	4
BL/73052-P	10	Classic - 3 Light Spotlight on a Plate	230V 50Hz	35W x 3	GU10 x 3	Steel & Glass	 Chrome	2

Recommended Lamp [Excluded]: Flash LED GU10 Lamp

Indoor	METRO SPOTLIGHTS	11. 	12. 	13. 	14. 
	VEGA SPOTLIGHTS	15. 	16. 	17. 	18. 
	NOVA SPOTLIGHT	19. 			

TECHNICAL SPECIFICATIONS

ITEM NUMBER	IMAGE NO.	DESCRIPTION	VOLTAGE	MAX WATTAGE	LAMP HOLDER	BODY MATERIAL	COLOUR	PCS/CRT
BL/71024PSN	11	Metro - 1 Light Spotlight	230V 50Hz	35W	GU10	Steel	 Satin Nickle & Chrome	8
BL/72024BSN	12	Metro - 2 Light Spotlight on a Bar	230V 50Hz	35W x 2	GU10 x 2	Steel	 Satin Nickle & Chrome	4
BL/73024BSN	13	Metro - 3 Light Spotlight on a Bar	230V 50Hz	35W x 3	GU10 x 3	Steel	 Satin Nickle & Chrome	4
BL/73024PSN	14	Metro - 3 Light Spotlight on a Plate	230V 50Hz	35W x 3	GU10 x 3	Steel	 Satin Nickle & Chrome	2
BL/WDF-P01W	15	Vega - 1 Light Spotlight	230V 50Hz	50W	GU10	Steel	 Matt White	100
BL/WDF-P01S	16	Vega - 1 Light Spotlight	230V 50Hz	50W	GU10	Steel	 Chrome	100
BL/WDF-P03W	17	Vega - 3 Light Spotlight on a Plate	230V 50Hz	50W x 3	GU10 x 3	Steel	 Matt White	20
BL/WDF-P03S	18	Vega - 3 Light Spotlight on a Plate	230V 50Hz	50W x 3	GU10 x 3	Steel	 Chrome	20
BL/P1A7-W	19	Nova - 1 Light SpotLight	230V 50Hz	50W	GU10	Aluminium	 White	100

T8 Open Channel Fittings [230V 50Hz]

3 Year Guarantee

Recommended Lamp [Excluded]:
Flash LED T8 Tube
For LED Use Only

Available As

1.2m

1.5m



Single T8 Open Channel Fitting [Lamp Excluded]

Available As

0.6m

1.2m

1.5m



Double T8 Open Channel Fitting [Lamps Excluded]

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SIZE	TUBE (EXCL.)	BODY MATERIAL	COLOUR	L X W X H (MM)	IP RATING	PCS/ CRT
PR/O136H	T8 Open Channel Fitting	Single	1 x T8 1.2m	Steel	White	1200mm x 40mm x 24mm	IP20	20
PR/O158H	T8 Open Channel Fitting	Single	1 x T8 1.5m	Steel	White	1500mm x 50mm x 27mm	IP20	20
PR/O236H	T8 Open Channel Fitting	Double	2 x T8 1.2m	Steel	White	1200mm x 40mm x 24mm	IP20	20
PR/O258H	T8 Open Channel Fitting	Double	2 x T8 1.5m	Steel	White	1500mm x 50mm x 27mm	IP20	20
PR/O29H	T8 Open Channel Fitting	Double	2 x T8 0.6cm	Steel	White	600mm x 50mm x 27mm	IP20	20
PR/O258	T8 Open Channel Fitting	Double	2 x T8 2.4cm	Steel	White	2400mm x 50mm x 27mm	IP20	30

Combo Pack - Double Open Channel Fitting

+ 2 x T8 LED Tubes [230V 50Hz]

1 Year Guarantee

Available As

1.2m



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SIZE	TUBE (INCL.)	BODY MATERIAL	COLOUR	L X W X H (MM)	IP RATING	PCS/ CRT
T-COMBO1.2	T8 Open Channel Fitting	Double	2 x T8 1.2m	Steel	White	1200mm x 40mm x 24mm	IP20	4

LED Ceiling Luminaires [230V 50Hz] Non-Dimmable - 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required

Indoor

Available As

330mm380mm



LED Ceiling Light - Torus
BL/CL03

Available As

250mm



LED Ceiling Fitting • Azalea Design
BL/CLAZALEADB-D

Available As

250mm



LED Ceiling Fitting - 7pcs/Tray
BL/CL220DB

Available As

250mm300mm



LED Ceiling Light - Square
BL/CL28

Available As

250mm



LED Ceiling Fitting • Maple Design
BL/CLMAPLEDB-D

Available As

300mm



LED Ceiling Fitting - 6pcs/Tray
BL/CL300DB

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	BASE	DIFFUSER	L X W X H (mm)	PCS/CRT
BL/CL03-12W	LED Ceiling Light - Square	900 lm	12W	6000K	Metal	PC	250mm x 250mm	20
BL/CL03-18W	LED Ceiling Light - Square	1350 lm	18W	6000K	Metal	PC	300mm x 300mm	10
BL/CL28-18W	LED Ceiling Light - Torus	1350 lm	18W	3000K	Metal	PC	330mm	10
BL/CL28-24D	LED Ceiling Light - Torus	1800 lm	24W	6000K	Metal	PC	380mm	10
BL/CL28-24W	LED Ceiling Light - Torus	1800 lm	24W	3000K	Metal	PC	380mm	10
BL/CL22-12D	LED Ceiling Light - Square	900 lm	12W	5000K	Steel	PMMA	275mm x 275mm	10
BL/CL300DB-D	LED Ceiling Fitting - 6pcs/Tray	1400 lm	18W	6000K	Metal	PC	300mm x 165mm	6
BL/CL300DB-W	LED Ceiling Fitting - 6pcs/Tray	1400 lm	18W	3000K	Metal	PC	300mm x 165mm	6
BL/CL220DB-D	LED Ceiling Fitting - 7pcs/Tray	960 lm	12W	6000K	Metal	PC	250mm x 50mm	7
BL/CLAZALEADB-D	LED Ceiling Fitting • Azalea Design - 7pcs/Tray	960 lm	12W	6000K	Metal	Opal	250mm x 50mm	7
BL/CLMAPLEDB-D	LED Ceiling Fitting • Maple Design- 7pcs/Tray	960 lm	12W	6000K	Metal	Opal	250mm x 50mm	7

Ceiling Light Fittings with Metal Base [230V 50Hz] - 3 Year Guarantee

Use with Flash LED Kit [Excluded]
Fittings Consist of Metal Base & Diffuser
Light Source / Lamp Holder are Excluded.
LED Light [LED Kit] Must be Added.

Indoor



LED Kits [Excluded]



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	WATTAGE	BASE	DIFFUSER	CUPS/TWIST LOCK		DIAMETER X DEPTH (MM)	PCS/ CRT
BL/CL06-300	Opal Ceiling Fitting	Round	15/18W Kit	Metal	Opal PC	N/A	Twist Lock	330mm x 65mm	10
BL/CL06-350	Opal Ceiling Fitting	Round	18W Kit	Metal	Opal PC	N/A	Twist Lock	385mm x 55mm	10

LED Nimbus Ceiling Lights [230V 50Hz] Non-Dimmable • Metal Base

Integrated LED Light | No Additional Lamp Required



LED Nimbus Surface Mount Ceiling Light • Square
BL/CLNSS10



LED Nimbus Surface Mount Ceiling Light • Round
BL/CLNS



LED Nimbus Suspended Ceiling Light • Round
Cable Length: Up to 1.5m [Adjustable]
BL/CLNS10

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	LUMEN	WATTAGE	COLOUR TEMPERATURE	DIFFUSER	COLOUR	L X W X H (MM)	PCS/CRT
BL/CLNS10-32D	LED Nimbus Suspended Ceiling Light	Round	2880lm	32W	6000K	PC Opal	White	380mm x 60mm	1
BL/CLNS10-32WW	LED Nimbus Suspended Ceiling Light	Round	2880lm	32W	3000K	PC Opal	White	380mm x 60mm	1
BL/CLNS-32D	LED Nimbus Surface Mount Ceiling Light	Round	2880lm	32W	6000K	PC Opal	White	380mm x 90mm	1
BL/CLNS-32WW	LED Nimbus Surface Mount Ceiling Light	Round	2880lm	32W	3000K	PC Opal	White	380mm x 90mm	1
BL/CLNSS10-32D	LED Nimbus Surface Mount Ceiling Light	Square	2880lm	32W	6000K	PC Opal	White	400mm x 400mm x 90mm	1
BL/CLNSS10-32W	LED Nimbus Surface Mount Ceiling Light	Square	2880lm	32W	3000K	PC Opal	White	400mm x 400mm x 90mm	1
BL/CLNS-48D	LED Nimbus Surface Mount Ceiling Light	Round	4300lm	48W	6000K	PC Opal	White	480mm x 90mm	1
BL/CLNS-48WW	LED Nimbus Surface Mount Ceiling Light	Round	4300lm	48W	3000K	PC Opal	White	480mm x 90mm	1

Glass Light Fittings • Design Collection [230V 50Hz] - 3 Year Guarantee

E27 Lampholders [Lamps Excluded]
Box Pack | Indoor IP20

Indoor



Glass Checkered Design
BL/ALB3CC

Glass Grid Design
BL/ALB3GC



Glass Vine Design
BL/ALB3VC

Glass Whirl Design
BL/ALB3WC

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MAX WATTAGE	COLOUR OF CLIPS	DIAMETER (MM)	HEIGHT (MM)	IP
BL/ALB3CC	Glass Checkered Design W/Lampholder Box Pack	200W	Chrome	Ø 300mm	95mm	IP20
BL/ALB3GC	Glass Grid Design W/Lampholder Box Pack	200W	Chrome	Ø 300mm	95mm	IP20
BL/ALB3VC	Glass Vine Design W/Lampholder Box Pack	200W	Chrome	Ø 300mm	95mm	IP20
BL/ALB3WC	Glass Whirl Design W/Lampholder Box Pack	200W	Chrome	Ø 300mm	95mm	IP20

Decorative Cordsets [230V 50Hz] - 3 Year Guarantee

Lampholder



Decorative Cordsets • White
N-CORDW



Decorative Cordsets • Black
N-CORDB

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LAMP HOLDER	WATTAGE	VOLTAGE	CORD LENGTH	COLOUR		L X W (mm)	CUT OUT
N-CORDB	Decorative Cordset	E27	100W	230V 50Hz	1m		Black	40mm x 95mm	40
N-CORDW	Decorative Cordset	E27	100W	230V 50Hz	1m		White	40mm x 95mm	40

Desk Lamps [230V 50Hz] - 3 Year Guarantee

E27 Lampholder
Recommended Lamp [Excluded]:
Flash LED A60 Lamp • E27

Lampholder



Desk Lamp • Black
BL/MT407B



Desk Lamp • White
BL/MT407W

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	LAMP HOLDER	MATERIAL	COLOUR		CORD LENGTH	L X W X H (MM)	PCS/CRT
BL/MT407W	Desk Lamp	40W	1 x E27	Metal & Plastic		White	1m	365mm x 142mm	20
BL/MT407B	Desk Lamp	40W	1 x E27	Metal & Plastic		Black	1m	365mm x 142mm	20

Ceiling Fans [230V 50Hz] · 3 Year Guarantee

Remote Controlled & Wall Operated



Vortice Ceiling Fan with Remote

- 3 Speed Modes & Timer
- Low · 46W · 100 RPM
 - Medium · 66W · 150 RPM
 - High · 71W · 190 RPM



Spira LED Ceiling Fan with Remote

Integrated LED Light
No Additional Lamp Required

- Lumen: 1000 lm · Light Wattage: 20W
6 Speed Modes & Timer
- Min · 5W · 130 RPM
 - Low · 8W · 160 RPM
 - Moderate · 14W · 200 RPM
 - Medium · 20W · 220 RPM
 - High · 25W · 235 RPM
 - Max · 30W · 250 RPM

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	BLADES	BLADE MATERIAL	BODY MATERIAL	DIFFUSER	COLOUR	DIAMETER	BLADE L x W	IP	PCS / CRT
F-52HS308BLK	Vortice Ceiling Fan with Remote	3	ABS	Steel	N/A	Black	52" [132cm]	600mm x 120mm	IP20	1
F-52HS308WHT	Vortice Ceiling Fan with Remote	3	ABS	Steel	N/A	White	52" [132cm]	600mm x 120mm	IP20	1
F-52HS30842B	Spira LED Ceiling Fan with Remote	3	ABS	Steel	PC · Opal	Black	42" [107cm]	450 mm	IP20	1
F-52HS30842W	Spira LED Ceiling Fan with Remote	3	ABS	Steel	PC · Opal	White	42" [107cm]	450 mm	IP20	1



Giro LED Ceiling Fan with Remote

Integrated LED Light
No Additional Lamp Required

Lumen: 680 lm · Light Wattage: 9W
3 Speed Modes & Timer

- Low · 42W · 100 RPM
- Medium · 70W · 150 RPM
- High · 79W · 190 RPM



Vento LED Ceiling Fan with Remote

Integrated LED Light
No Additional Lamp Required

Lumen: 680 lm · Light Wattage: 9W
3 Speed Modes & Timer

- Low · 37W · 190 RPM
- Medium · 52W · 233 RPM
- High · 65W · 262 RPM



Aero LED Ceiling Fan with Remote

Integrated LED Light
No Additional Lamp Required

Lumen: 1500 lm · Light Wattage: 20W
3 Speed Modes & Timer

- Low · 20W · 140 RPM
- Medium · 40W · 220 RPM
- High · 61W · 238 RPM

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	BLADES	BLADE MATERIAL	BODY MATERIAL	DIFFUSER	COLOUR		DIAMETER	BLADE L x W	IP	PCS / CRT
F-52HS304WD	Giro LED Ceiling Fan with Remote	3	Poly Wood	Steel	PC • Opal		Wood	52" [132cm]	600mm x 129mm	IP20	1
F-52HS304WHT	Giro LED Ceiling Fan with Remote	3	Poly Wood	Steel	PC • Opal		White	52" [132cm]	600mm x 129mm	IP20	1
F-36HS303WHT	Vento LED Ceiling Fan with Remote	5	Poly Wood	Steel	PC • Opal		White	36" [92cm]	330mm x 144mm	IP20	1
F-9101348B	Aero LED Ceiling Fan with Remote	3	Poly Wood	Steel	Frosted Glass		Black	48" [122cm]	510mm x 120mm	IP20	1
F-9101348W	Aero LED Ceiling Fan with Remote	3	Poly Wood	Steel	Frosted Glass		White	48" [122cm]	510mm x 120mm	IP20	1
F-9101348C	Aero LED Ceiling Fan with Remote	3	Poly Wood	Steel	Frosted Glass		Walnut	48" [122cm]	510mm x 120mm	IP20	1

HOW PROFESSIONAL ARE YOUR LIGHTING SALES STAFF?

Flash offers FREE ONLINE TRAINING

on Lighting Basics, Basic Lighting Features, Project Lighting and Solar Lighting, everything you need to become a Professional Flash Lighting Consultant!

“I feel confident answering the client's question...”

- The Square Mica, MM

FREE Certificate, Badge and Online Graduation Ceremony!



***“We have attended
many trainings...
yours is superior”***

- CablElec, BC



SUITABLE FOR ALL STAFF MEMBERS!

More Sales • Competent Staff • Recognition by Flash
Better Product Knowledge • Improved Customer Satisfaction

Call 021-788 5532 for more information
or visit www.flash.za.com/training

Slim LED Floodlights • Non-Dimmable • 3 Year Guarantee
High Efficiency 100lm/W • Surge Protected • Beam Angle: 120°

Outdoor



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	SURGE PROTECTION	BODY	L x W (mm)	PCS/CRT
BL/ZR-TG005	NY10	LED Slim Floodlight	850 lm	10W	 6000K	2.5KV	Nylon, Aluminium	70mm x 95mm	-
BL/ZR-TG002	NY20	High Efficiency LED Slim Floodlight	2000 lm	20W	 6000K	2.5KV	Nylon, Aluminium	90mm x 120mm	40
BL/ZR-TG008	NY30	High Efficiency LED Slim Floodlight	3000 lm	30W	 6000K	2.5KV	Nylon, Aluminium	110mm x 145mm	20
BL/ZR-TG009	NY50	High Efficiency LED Slim Floodlight	5000 lm	50W	 6000K	2.5KV	Nylon, Aluminium	140mm x 185mm	12
BL/ZR-TG100	NY100	High Efficiency LED Slim Floodlight	10000 lm	100W	 6000K	4KV	Nylon, Aluminium	200mm x 255mm	10
BL/ZR-TG150	NY150	High Efficiency LED Slim Floodlight	15000 lm	150W	 6000K	4KV	Nylon, Aluminium	240mm x 320mm	5
BL/ZR-TG200	NY200	High Efficiency LED Slim Floodlight	20000 lm	200W	 6000K	4KV	Nylon, Aluminium	315mm x 385mm	5
BL/ZR-TG300	NY300	High Efficiency LED Slim Floodlight	30000 lm	300W	 6000K	4KV	Nylon, Aluminium	335mm x 445mm	4
BL/ZR-TG400	NY400	High Efficiency LED Slim Floodlight	40000 lm	400W	 6000K	4KV	Nylon, Aluminium	390mm x 530mm	1

*Note: This product has a 3 year guarantee for domestic and commercial use. For industrial and hazardous applications such as mines, quarries, processing plants or for mounting onto moving or vibrating machinery, the guarantee is 18 months.

Flash Pro Professional LED Slim Floodlight
[230V 50Hz] Non-Dimmable • 3 Year Guarantee
High Efficiency 160lm/W • Extra Bright • Surge Protected



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	BEAM ANGLE	COLOUR TEMPERATURE	SURGE PROTECTION	BODY	L x W (mm)
PL/ZR-TG005	Professional LED Slim Floodlight	8000 lm	50W	120°	 6000K	4KV	Nylon, Aluminium	165mm x 175mm
PL/ZR-TG100	Professional LED Slim Floodlight	16000 lm	100W	120°	 6000K	4KV	Nylon, Aluminium	235mm x 230mm
PL/ZR-TG200	Professional LED Slim Floodlight	32000 lm	200W	120°	 6000K	4KV	Nylon, Aluminium	315mm x 340mm

*Note: This product has a 3 year guarantee for domestic and commercial use. For industrial and hazardous applications such as mines, quarries, processing plants or for mounting onto moving or vibrating machinery, the guarantee is 18 months.

Slim SMD LED Floodlights with Radar Motion Sensor [230V 50Hz] Non-Dimmable • 3 Year Guarantee
Surge Protected | Radar Motion Sensor Maximum Distance: 8m



Outdoor



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	BEAM ANGLE	COLOUR TEMPERATURE	SURGE PROTECTION	BODY	L x W (mm)
BL/ZR-TG0062NY	LED Floodlight with Radar Motion Sensor	2000 lm	20W	120°	6000K	2.5KV	Nylon, Aluminium	90mm x 120mm
BL/ZR-TG008SNY	LED Floodlight with Radar Motion Sensor	3000 lm	30W	120°	6000K	2.5KV	Nylon, Aluminium	110mm x 145mm
BL/ZR-TG009SNY	LED Floodlight with Radar Motion Sensor	5000 lm	50W	120°	6000K	2.5KV	Nylon, Aluminium	145mm x 185mm

Slim SMD LED Floodlights with **PIR Motion Sensor** [230V 50Hz] Non-Dimmable · 3 Year Guarantee

Surge Protected | PIR Sensor Maximum Distance: 8m

Wattages

10W

20W

30W

50W

IP65

Surge
Protection

PIR
Sensor

GUARANTEE
3
YEAR



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	BEAM ANGLE	COLOUR TEMPERATURE	SURGE PROTECTION	BODY	L x W (mm)	PCS/CRT
BL/ZR-TG006S	Slim SMD LED Floodlight with PIR Sensor	750 lm	10W	120°	6000K	2.5KV	Aluminium	129mm x 171mm	30
BL/ZR-TG0062	Slim SMD LED Floodlight with PIR Sensor	1500 lm	20W	120°	6000K	2.5KV	Aluminium	150mm x 188mm	24
BL/ZR-TG008S	Slim SMD LED Floodlight with PIR Sensor	2300 lm	30W	120°	6000K	2.5KV	Aluminium	226mm x 240mm	18
BL/ZR-TG009S	Slim SMD LED Floodlight with PIR Sensor	3800 lm	50W	120°	6000K	2.5KV	Aluminium	226mm x 242mm	12

LED Floodlight with **Day/Night Sensor** [230V 50Hz] Non-Dimmable · 3 Year Guarantee

Wattage

30W

IP65



GUARANTEE
3
YEAR



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	BEAM ANGLE	COLOUR TEMPERATURE	BODY	L x W (mm)	PCS/CRT
BL-ZR-TG008D	LED Floodlight with Day/Night Sensor	2300 lm	30W	120°	6000K	Aluminium	226mm x 240mm	18

LED 12V DC LED Floodlight [12V] Non-Dimmable · 3 Year Guarantee

Outdoor



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	BEAM ANGLE	COLOUR TEMPERATURE	BODY	L X W (MM)	COLOUR	IP	PCS/CRT
BL/ZR-TG212V	LED 12V DC LED Floodlight	1500lm	20W	120°	6000K	Nylon, Aluminium	160mm x 120mm	Matt Black	IP65	50

Slim LED Floodlight with **Portable Stand** [230V 50Hz] Non-Dimmable · 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required



20W LED Portable Work Light
BL/ZR-TG002P

50W LED Portable Work Light
BL/ZR-TG009P

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	BEAM ANGLE	SURGE PROTECTION	COLOUR TEMPERATURE	STAND COLOUR	FLOODLIGHT COLOUR	L X W (MM)	PCS/CRT
BL/ZR-TG002P	LED Portable Work Light	1500lm	20W	120°	2.5KV	6000K	Yellow	Matt Black	145mm x 104mm	18
BL/ZR-TG009P	LED Portable Work Light	3500lm	50W	120°	2.5KV	6000K	Yellow	Matt Black	220mm x 170mm	6

Slim SMD **LED RGB Floodlight** & Remote [230V 50Hz]
Non-Dimmable · 3 Year Guarantee

Wattages

10W30W

IP65

3 YEAR GUARANTEE



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY	L x W (mm)	PCS/CRT
BL/ZR-TG005R	Slim SMD LED RGB Floodlight & Remote	N/A	10W	 RGB	Nylon, Aluminium	165mm x 110mm x 38mm	60
BL/ZR-TG008R	Slim SMD LED RGB Floodlight & Remote	N/A	30W	 RGB	Nylon, Aluminium	155mm x 135mm x 31mm	20

Tripod Stand [230V 50Hz] · 3 Year Guarantee

Recommended Use:
With FLASH LED Floodlights [Excluded]

IP65

3 YEAR GUARANTEE



Tripod Stand · Single
BL/JMLB

Tripod Stand · Double
BL/JMX2B

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LIGHT MOUNTING	BODY MATERIAL	COLOUR	L X W X H (MM)	IP	PCS/CRT
BL/JMLB	Tripod Stand	Single	Steel	 Yellow	1200mm x 40mm x 24mm	IP65	4
BL/JMX2B	Tripod Stand	Double	Steel	 Yellow	1500mm x 50mm x 27mm	IP65	4

Garden Spikes [230V 50Hz] · 3 Year Guarantee

Recommended Lamp [Excluded]:
BL/GS3019 - Flash LED E27 PAR38 Lamp
BL/SG3025/G - Flash LED GU10 Lamp

Lampholder

GU10

IP65

3 YEAR GUARANTEE



Garden Spike for GU10
BL/SG3025/G

Lampholder

E27

IP44

3 YEAR GUARANTEE



Garden Spike for PAR38
BL/GS3019

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	VOLTAGE	LAMP HOLDER	MATERIAL	COLOUR	LXW (MM)	IP	PCS/CRT
BL/GS3019	Garden Spike for PAR38	Max 80W	230V 50Hz	E27	PC	 Black	415mm x 73mm	IP44	60
BL/SG3025/G	Garden Spike for GU10	Max 50W	230V 50Hz	GU10	PC	 Black	390mm x 77mm	IP54	40

Security Lights [230V 50Hz] · 3 Year Guarantee

Recommended Lamps [Excluded]:
BL/JMP38:
Flash E27 LED PAR38 Lamps
BL/IT602L:
Flash GU10 LED Lamps

Lampholder

GU10

IP54

PIR Sensor

3 YEAR GUARANTEE



Security Light with Motion Sensor for GU10
BL/IT602

Lampholder

E27

IP44

PIR Sensor

3 YEAR GUARANTEE



Security Light with Motion Sensor for PAR38
BL/JMP38

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	VOLTAGE	LAMP HOLDER	DETECTION ANGLE	MATERIAL	COLOUR	LXW (MM)	IP	PCS/CRT
BL/JMP38	Security Light with Motion Sensor for PAR38	Max 2 x150W	230V 50Hz	2 x E27	180°	Plastic	 Black	115mm x 101mm	IP44	20
BL/IT602	Security Light with Motion Sensor for GU10	Max 2 x 50W	230V 50Hz	2 x GU10	180°	Plastic	 Black	115mm x 101mm	IP54	20

Waterproof T8 Fitting [230V 50Hz] · 3 Year Guarantee

Recommended Lamp [Excluded]: Flash LED T8 Tube

Available As

- 0.6m
- 1.2m
- 1.5m



TECHNICAL SPECIFICATIONS


ITEM NUMBER	DESCRIPTION	SIZE	TUBE (EXL.)	COLOUR	BODY MATERIAL	DIFFUSER	L X W X H (MM)	IP	PCS/CRT
PR/F7260	Waterproof T8 Fitting	Double	2 x T8 0.6m	Grey	ABS	Clear	600mm x 116mm x 87mm	IP65	8
PR/F7136H	Waterproof T8 Fitting	Single	1 x T8 1.2m	Grey	ABS	Clear	1263mm x 74mm x 87mm	IP65	12
PR/F7236H	Waterproof T8 Fitting	Double	2 x T8 1.2m	Grey	ABS	Clear	1263mm x 116mm x 87mm	IP65	8
PR/F7158H	Waterproof T8 Fitting	Single	1 x T8 1.5m	Grey	ABS	Clear	1565mm x 74mm x 87mm	IP65	12
PR/F7258H	Waterproof T8 Fitting	Double	2 x T8 1.5m	Grey	ABS	Clear	1565mm x 116mm x 87mm	IP65	8

LED Waterproof Battens [230V 50Hz] Non-Dimmable · 3 Year Guarantee

Integrated LED Light
No Additional Lamp Required

Available As


- 1.2m
- 1.5m



Waterproof LED Batten

Available As

- 1.2m



Waterproof Linkable LED Batten

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	DIFFUSER	LXWXD (MM)	IP	PCS/CRT
BL/B002-36D	Waterproof LED Batten	2700 lm	36W	6000K	PC	PC White	1155mm x 63mm x 35mm	IP65	30
BL/B005-45D	Waterproof LED Batten	3400 lm	45W	6000K	PC	PC White	1460mm x 63mm x 35mm	IP65	30
BL/9703U-60L	Waterproof Linkable LED Batten	4500 lm	60W	6000K	PC	PC White	1200mm x 70mm x 43mm	IP65	30

Flute Fittings Die Cast Aluminium [230V 50Hz] · 3 Year Guarantee

Recommended Lamp [Excluded]:
GU10 Lampholder - Flash LED GU10 Lamp
E27 Lampholder - Flash LED A60 Lamp

Outdoor



Lampholders



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	VOLTAGE	WATTAGE	LAMP HOLDER	LENS MATERIAL	COLOUR		LXW (MM)	IP	PCS/CRT
BL/K41000	Up & Down Flute Fitting	230V 50Hz	50W x 2	GU10 x 2	Glass Frosted		Charcoal	190mm x 115mm x 62mm	IP54	10
BL/K41001-1	Up & Down Flute Fitting	230V 50Hz	50W x 2	GU10 x 2	Glass Clear		Charcoal	190mm x 65mm	IP54	10
BL/K41002-1	Up / Down Flute Fitting	230V 50Hz	50W x 1	GU10	Glass Clear		Charcoal	120mm x 65mm	IP54	20
BL/K41050	Up / Down Flute Fitting	230V 50Hz	50W x 1	GU10	Glass/PC Clear		Charcoal	205mm x 95mm x 110mm	IP54	10
BL/K41051	Up & Down Flute Fitting	230V 50Hz	50W x 2	GU10 x 2	Glass/PC Clear		Charcoal	300mm x 95mm x 110mm	IP54	10
BL/K4100108G	Up & Down Flute Fitting	230V 50Hz	50W x 2	E27 x 2	Glass Frosted		Grey	300mm x 108mm	IP54	10
BL/K4100108B	Up & Down Flute Fitting	230V 50Hz	50W x 2	E27 x 2	Glass Frosted		Black	300mm x 108mm	IP54	10
BL/K4100145G	Up & Down Flute Fitting	230V 50Hz	50W x 2	E27 x 2	Glass Frosted		Grey	450mm x 145mm	IP54	6

LED Outdoor Flute Fittings • Coastal Range [230V 50Hz] Non-Dimmable • 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required

Outdoor



Up / Down
Flute Fitting with
Side Illuminating Diffuser
BL/P9Y4-B



Up & Down
Flute Fitting
BL/P9Y1-B



Up & Down
Flute Fitting
BL/P10F1-B



Up & Down
Flute Fitting with
Side Illuminating Diffuser
BL/P9Y3-B



Up & Down
Flute Fitting with
Side Illuminating Diffuser
BL/P10F3-B



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	VOLTAGE	LUMEN	WATTAGE	BODY MATERIAL	LENS MATERIAL	COLOUR		L X W X D (MM)	IP	PCS/CRT
BL/P10F1-B	Flute Up & Down Fitting	230V 50Hz	1050 lm	14W	ABS	Clear PC		Black	162mm x 78mm x 99mm	IP65	20
BL/P9Y1-B	Flute Up & Down Fitting	230V 50Hz	1050 lm	14W	ABS	Clear PC		Black	160mm x 78mm x 99mm	IP65	20
BL/P10F3-B	Flute Up & Down Fitting	230V 50Hz	1050 lm	14W	ABS	Clear PC		Black	240mm x 78mm x 99mm	IP65	20
BL/P9Y3-B	Flute Up & Down Fitting	230V 50Hz	1050 lm	14W	ABS	Clear PC		Black	240mm x 78mm x 99mm	IP65	20
BL/P9Y4-B	Flute Up / Down Fitting	230V 50Hz	675 lm	9W	ABS	Clear PC		Black	156mm x 78mm x 99mm	IP65	20

Aluminium Bulkheads › Round [230V 50Hz] · 3 Year Guarantee

Recommended Lamp [Excluded]:
Large: Flash E27 Spiral CFL / A60 LED Lamp



Lampholder



Plain Bulkhead

Grid Bulkhead

Eyelid Bulkhead

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	SIZE	WATTAGE	LAMP HOLDER	BODY MATERIAL	COLOUR	DIFFUSER	LXW (MM)	IP	PCS/CRT
BL/JM1/L/BL	Bulkhead with Grid	Round	Large	100W	E27	Aluminium	Black	Frosted Glass	235mm x 124mm	IP44	10
BL/JM1/L/WH	Bulkhead with Grid	Round	Large	100W	E27	Aluminium	White	Frosted Glass	235mm x 124mm	IP44	10
BL/JM1/S/BL	Bulkhead with Grid	Round	Small	60W	E27	Aluminium	Black	Frosted Glass	178mm x 107mm	IP44	20
BL/JM1/S/WH	Bulkhead with Grid	Round	Small	60W	E27	Aluminium	White	Frosted Glass	178mm x 107mm	IP44	20
BL/JM2/L/BL	Plain Bulkhead	Round	Large	100W	E27	Aluminium	Black	Frosted Glass	235mm x 110mm	IP44	10
BL/JM2/L/WH	Plain Bulkhead	Round	Large	100W	E27	Aluminium	White	Frosted Glass	235mm x 110mm	IP44	10
BL/JM2/S/BL	Plain Bulkhead	Round	Small	60W	E27	Aluminium	Black	Frosted Glass	178mm x 82mm	IP44	20
BL/JM2/S/WH	Plain Bulkhead	Round	Small	60W	E27	Aluminium	White	Frosted Glass	178mm x 82mm	IP44	20
BL/JM85/L/BL	Bulkhead with Eyelid	Round	Large	100W	E27	Aluminium	Black	Frosted Glass	235mm x 110mm	IP44	10
BL/JM85/L/WH	Bulkhead with Eyelid	Round	Large	100W	E27	Aluminium	White	Frosted Glass	235mm x 110mm	IP44	10
BL/JM85/S/BL	Bulkhead with Eyelid	Round	Small	60W	E27	Aluminium	Black	Frosted Glass	190mm x 80mm	IP44	20
BL/JM85/S/WH	Bulkhead with Eyelid	Round	Small	60W	E27	Aluminium	White	Frosted Glass	190mm x 80mm	IP44	20



Lampholder



Plain Bulkhead



Grid Bulkhead



Eyelid Bulkhead

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	SIZE	WATTAGE	LAMP HOLDER	BODY MATERIAL	COLOUR	DIFFUSER	LXW (MM)	IP	PCS/CRT
BL/JM30/L/BL	Bulkhead with Eyelid	Oval	Large	100W	E27	Aluminium	Black	Frosted Glass	279mm x 167mm	IP44	10
BL/JM30/L/WH	Bulkhead with Eyelid	Oval	Large	100W	E27	Aluminium	White	Frosted Glass	279mm x 167mm	IP44	10
BL/JM30/S/BL	Bulkhead with Eyelid	Oval	Small	60W	E27	Aluminium	Black	Frosted Glass	210mm x 105mm	IP44	20
BL/JM30/S/WH	Bulkhead with Eyelid	Oval	Small	60W	E27	Aluminium	White	Frosted Glass	210mm x 105mm	IP44	20
BL/JM4/L/BL	Plain Bulkhead	Oval	Large	100W	E27	Aluminium	Black	Frosted Glass	275mm x 155mm	IP44	10
BL/JM4/L/WH	Plain Bulkhead	Oval	Large	100W	E27	Aluminium	White	Frosted Glass	275mm x 155mm	IP44	10
BL/JM4/S/BL	Plain Bulkhead	Oval	Small	60W	E27	Aluminium	Black	Frosted Glass	210mm x 105mm	IP44	20
BL/JM4/S/WH	Plain Bulkhead	Oval	Small	60W	E27	Aluminium	White	Frosted Glass	210mm x 105mm	IP44	20
BL/JM3/L/BL	Bulkhead with Grid	Oval	Large	100W	E27	Aluminium	Black	Frosted Glass	265mm x 155mm	IP44	10
BL/JM3/L/WH	Bulkhead with Grid	Oval	Large	100W	E27	Aluminium	White	Frosted Glass	265mm x 155mm	IP44	10
BL/JM3/S/BL	Bulkhead with Grid	Oval	Small	60W	E27	Aluminium	Black	Frosted Glass	210mm x 105mm	IP44	20
BL/JM3/S/WH	Bulkhead with Grid	Oval	Small	60W	E27	Aluminium	White	Frosted Glass	210mm x 105mm	IP44	20

LED Bulkheads • Orbit [230V 50Hz] Non-Dimmable • 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required
Available in Black & White



Large LED Bulkhead • Round

Small LED Bulkhead • Round

Large LED Bulkhead • Oval

Small LED Bulkhead • Oval

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY MATERIAL	COLOUR	DIFFUSER	LXW (MM)	PCS/CRT
BL/YRB9B13B	Orbit Range - Small LED Bulkhead	Round	450 lm	6W	6000K	ABS	Black	Frosted	132mm x 53mm	30
BL/YRB9B13W	Orbit Range - Small LED Bulkhead	Round	450 lm	6W	6000K	ABS	White	Frosted	132mm x 53mm	30
BL/YRB9B12B	Orbit Range - Small LED Bulkhead	Oval	450 lm	6W	6000K	ABS	Black	Frosted	180mm x 85mm x 57mm	30
BL/YRB9B12W	Orbit Range - Small LED Bulkhead	Oval	450 lm	6W	6000K	ABS	White	Frosted	180mm x 85mm x 57mm	30
BL/YRB18B13B	Orbit Range - Large LED Bulkhead	Round	900 lm	12W	6000K	ABS	Black	Frosted	170mm x 55mm	24
BL/YRB18B13W	Orbit Range - Large LED Bulkhead	Round	900 lm	12W	6000K	ABS	White	Frosted	170mm x 55mm	24
BL/YRB18B12B	Orbit Range - Large LED Bulkhead	Oval	900 lm	12W	6000K	ABS	Black	Frosted	230mm x 106mm x 56mm	24
BL/YRB18B12W	Orbit Range - Large LED Bulkhead	Oval	900 lm	12W	6000K	ABS	White	Frosted	230mm x 106mm x 56mm	24

LED Bulkheads • Opaline [230V 50Hz]

Non-Dimmable • 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required
Available in Black & White


Outdoor




Large LED Bulkhead • Round



Small LED Bulkhead • Round



Large LED Bulkhead • Oval



Small LED Bulkhead • Oval

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY MATERIAL	COLOUR	DIFFUSER	LXW (MM)	PCS/CRT
BL/YRB10WPR-B	Opaline - Small LED Bulkhead	Round	750 lm	10W	6500K	PP	Black	Frosted	170mm	6
BL/YRB10WPR-W	Opaline - Small LED Bulkhead	Round	750 lm	10W	6500K	PP	White	Frosted	170mm	6
BL/YRB10WPO-B	Opaline - Small LED Bulkhead	Oval	750 lm	10W	6500K	PP	Black	Frosted	210mm x 100mm	6
BL/YRB10WPO-W	Opaline - Small LED Bulkhead	Oval	750 lm	10W	6500K	PP	White	Frosted	210mm x 100mm	6
BL/YRB15WPR-B	Opaline - Large LED Bulkhead	Round	1125 lm	15W	6500K	PP	Black	Frosted	205mm	6
BL/YRB15WPR-W	Opaline - Large LED Bulkhead	Round	1125 lm	15W	6500K	PP	White	Frosted	205mm	6
BL/YRB15WPO-B	Opaline - Large LED Bulkhead	Oval	1125 lm	15W	6500K	PP	Black	Frosted	275mm x 135mm	6
BL/YRB15WPO-W	Opaline - Large LED Bulkhead	Oval	1125 lm	15W	6500K	PP	White	Frosted	275mm x 135mm	6

Garden Lanterns & Pedestals [230V 50Hz] · 3 Year Guarantee

Recommended Lamp [Excluded]: Flash LED A60 E27 Lamp

Lampholder



4 Panel
Up-facing Lantern
BL/4101B



4 Panel
Down-facing Lantern
BL/4102B



4 Panel
Pedestal
BL/4104B



6 Panel
Up-facing Lantern
BL/6102B



6 Panel
Down-facing Lantern
BL/6202B



6 Panel
Pedestal
BL/6104B

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	PANELS	WATTAGE	LAMP HOLDER	MATERIAL	COLOUR	PANEL	L X W X H (MM)	IP	PCS/CRT
BL/4101B	Up-facing Lantern	4	60W	E27	Aluminium	Black	Clear Glass	150mm x 200mm x 375mm	IP44	12
BL/4101W	Up-facing Lantern	4	60W	E27	Aluminium	White	Clear Glass	150mm x 200mm x 375mm	IP44	12
BL/4102B	Down-facing Lantern	4	60W	E27	Aluminium	Black	Clear Glass	150mm x 200mm x 375mm	IP44	12
BL/4102W	Down-facing Lantern	4	60W	E27	Aluminium	White	Clear Glass	150mm x 200mm x 375mm	IP44	12
BL/4104B	Pedestal	4	60W	E27	Aluminium	Black	Clear Glass	150mm x 200mm x 405mm	IP44	12
BL/4104W	Pedestal	4	60W	E27	Aluminium	White	Clear Glass	150mm x 200mm x 405mm	IP44	12
BL/6102B	Up-facing Lantern	6	60W	E27	Aluminium	Black	Clear Glass	175mm x 210mm x 360mm	IP44	12
BL/6102W	Up-facing Lantern	6	60W	E27	Aluminium	White	Clear Glass	175mm x 210mm x 360mm	IP44	12
BL/6104B	Pedestal	6	60W	E27	Aluminium	Black	Clear Glass	175mm x 150mm x 405mm	IP44	12
BL/6104W	Pedestal	6	60W	E27	Aluminium	White	Clear Glass	175mm x 150mm x 405mm	IP44	12
BL/6202B	Down-facing Lantern	6	60W	E27	Aluminium	Black	Clear Glass	175mm x 210mm x 360mm	IP44	12
BL/6202W	Down-facing Lantern	6	60W	E27	Aluminium	White	Clear Glass	175mm x 210mm x 360mm	IP44	12



3 Panel Half Lantern
BL/K42249B



5 Panel Half Lantern
BL/K42253B



3 Panel Half Lantern
BL/K42247B

Lampholder



4 Panel Down-facing
Lantern [Large]
BL/K32037-LB



4 Panel Down-facing
Lantern [Small]
BL/K32037-SB



6 Panel Up-facing
Lantern [Small/Large]
BL/K4301

Lampholder



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	PANELS	WATTAGE	LAMP HOLDER	MATERIAL	COLOUR	PANEL	L X W X H (MM)	IP	PCS/CRT
BL/K42247B	Half Lantern	3	60W	E27	Aluminium	Black	Frosted Glass	177mm x 100mm x 365mm	IP54	10
BL/K42247W	Half Lantern	3	60W	E27	Aluminium	White	Frosted Glass	177mm x 100mm x 365mm	IP54	10
BL/K42249B	Half Lantern	3	60W	E27	Aluminium	Black	Frosted Glass	260mm x 100mm x 438mm	IP54	10
BL/K42253B	Half Lantern	5	60W	E27	Aluminium	Black	Frosted Glass	260mm x 100mm x 383mm	IP54	10
BL/K42253W	Half Lantern	5	60W	E27	Aluminium	White	Frosted Glass	260mm x 100mm x 383mm	IP54	10
BL/K32037-SB	Small Down-facing Lantern	4	60W	E27	Aluminium	Black	Frosted Glass	170mm x 205mm x 320mm	IP44	8
BL/K32037-SW	Small Down-facing Lantern	4	60W	E27	Aluminium	White	Frosted Glass	170mm x 205mm x 320mm	IP44	8
BL/K32037-LB	Large Down-facing Lantern	4	60W	E27	Aluminium	Black	Frosted Glass	195mm x 270mm x 400mm	IP44	8
BL/K4301-SB	Small Up-facing Lantern	6	60W	E27	Aluminium	Black	Opal PC	165mm x 205mm x 360mm	IP44	10
BL/K4301-SW	Small Up-facing Lantern	6	60W	E27	Aluminium	White	Opal PC	165mm x 205mm x 360mm	IP44	6
BL/K4301-LB	Large Up-facing Lantern	6	60W	E27	Aluminium	Black	Opal PC	237mm x 265mm x 415mm	IP44	6

Garden Lanterns & Pedestals [230V 50Hz] · 3 Year Guarantee

Recommended Lamp [Excluded]: Flash LED A60 E27 Lamp

Lampholder



Diana - Down-facing Lantern
BL/K43036LB

Victoria - Down-facing Lantern
BL/K43074LB

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	PANELS	WATTAGE	LAMP HOLDER	MATERIAL	COLOUR	PANEL	L X W X H (MM)	IP	PCS/CRT
BL/K43036LB	Diana - Down-facing Lantern	6	50W	E27	Aluminium	Black	Frosted Glass	225mm x 295mm x 570mm	IP44	4
BL/K43074LB	Victoria - Down-facing Lantern	4	50W	E27	Aluminium	Black	Clear Glass	280mm x 330mm x 565mm	IP44	4

LED Fairylights [230V 50Hz] Non-Dimmable · 1 Year Guarante

Wattage



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	LED/METRE	VOLTAGE	COLOUR TEMPERATURE	COLOUR	LENGTH (MM)	PKG	PCS/CRT
XLED-SL2013W	LED Fairy Lights [T-Wiring]	3.5W	10 LED / m	230V 50Hz	3000K	White	10m	Box	10
XLED-SL2013D	LED Fairy Lights [T-Wiring]	3.5W	10 LED / m	230V 50Hz	6000K	White	10m	Box	10

LUXURY COMPOSITE DECKING



Splinter
Resistant



Weather
Resistant



Termite
Resistant



Stain
Resistant



Fade
Resistant



Mold
Resistant



Low
Maintenance



ECO
FRIENDLY

AVAILABLE COLOURS:

MICA ASH

TEAK

IPE

ANTIQUE

SAND

CALL US NOW

021 788 5532

VISIT US AT

Capricorn Business Park, 14 Gateway Cl,
Muizenberg, Cape Town, 7948

PRODUCT OF

FLAORTM

LED Wall Lamps [230V 50Hz] Non-Dimmable · 3 Year Guarantee
Integrated LED Light | No Additional Lamp Required

Outdoor



LED Wall Light



Razor Wall Lamps



Eclipse Wall Lamps

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY MATERIAL	COLOUR	DIFFUSER	L X W X H (MM)	IP	PCS/CRT
BL/K42001	LED Wall Light	N/A	420lm	6W	6000K	Aluminium	Charcoal	Glass	160mm x 90mm	IP54	10
BL/K2210SRG	Eclipse Wall Lamp	Round	900 lm	12W	6000K	Aluminium	Grey	PC Opal	150mm	IP54	10
BL/K2210SRB	Eclipse Wall Lamp	Round	900 lm	12W	6000K	Aluminium	Black	PC Opal	150mm	IP54	10
BL/K2210LRB	Eclipse Wall Lamp	Round	1350 lm	18W	6000K	Aluminium	Black	PC Opal	220mm	IP54	10
BL/K2211SSG	Eclipse Wall Lamp	Square	900 lm	12W	6000K	Aluminium	Grey	PC Opal	150mm x 150mm	IP54	10
BL/K2211SSB	Eclipse Wall Lamp	Square	900 lm	12W	6000K	Aluminium	Black	PC Opal	150mm x 150mm	IP54	10
BL/K2211LSG	Eclipse Wall Lamp	Square	1350 lm	18W	6000K	Aluminium	Grey	PC Opal	220mm x 220mm	IP54	10
BL/K2211LSB	Eclipse Wall Lamp	Square	1350 lm	18W	6000K	Aluminium	Black	PC Opal	220mm x 220mm	IP54	10
BL/K2205RB	Razor Wall Lamp	Round	750 lm	10W	6000K	Aluminium	Black	PC Opal	170mm	IP54	10


LED Garden Wall Lights • Auben Range [230V 50Hz] Non-Dimmable • 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required

Outdoor



LED Garden Wall Light • Auben
Square • Eyelid
BL/SR1201/B



LED Garden Wall Light • Auben
Rectangular • Eyelid
BL/SR1502/W



LED Outdoor Wall Light
Coastal Range • Rectangular
BL/P2F-B



LED Outdoor Wall Light
Coastal Range • Round
BL/P6Y-B



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY MATERIAL	COLOUR	L X W (MM)	IP	PCS/CRT
BL/SR1201/B	LED Garden Wall Light • Auben • Eyelid	Square	60 lm	1W	6000K	ABS • PC	Black	123mm x 123mm	IP54	20
BL/SR1502/W	LED Garden Wall Light • Auben • Eyelid	Rectangular	120 lm	2W	6000K	ABS • PC	White	230mm x 80mm	IP54	20
BL/P2F-B	LED Outdoor Wall Light • Coastal Range	Rectangular	170 lm	3W	6500K	ABS	Black	134mm x 85mm	IP44	20
BL/P6Y-B	LED Outdoor Wall Light • Coastal Range	Round	170 lm	3W	6500K	ABS	Black	110mm x 15mm	IP44	20

LED Flute Fittings [230V 50Hz] Non-Dimmable · 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required



Outdoor



2 Light LED Flute
Beacon Design • Square
BL/K2228



2 Light LED Flute
Beacon Design • Round
BL/K230

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY MATERIAL	COLOUR	L X D X W (MM)	PCS/CRT
BL/K2228-D	2 Light LED Flute - Beacon Design	Square	1125 lm	15W	 6000K	Aluminium-PC	 Black	130mm x 105mm x 95mm	20
BL/K2228-WW	2 Light LED Flute - Beacon Design	Square	1125 lm	15W	 3000K	Aluminium-PC	 Black	130mm x 105mm x 95mm	20
BL/K2230-D	2 Light LED Flute - Beacon Design	Round	975 lm	3W	 6500K	Aluminium-PC	 Black	130mm x 105mm x 95mm	20
BL/K2230-WW	2 Light LED Flute - Beacon Design	Round	975 lm	3W	 3000K	Aluminium-PC	 Black	130mm x 105mm x 95mm	20

LED Outdoor Light - Signal Design [230V 50Hz]

Non-Dimmable · 3 Year Guarantee

Integrated LED Light

No Additional Lamp Required



LED Outdoor Light

Signal Design · Round

BL/K2271



LED Outdoor Light

Signal Design · Square

BL/K2270

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY MATERIAL	COLOUR	L X D X W (MM)	IP	PCS/CRT
BL/K2270	LED Outdoor Light - Signal Design	Square	780 lm	12W	6000K	Aluminium · PC	Black	180mm x 135mm x 130 mm	IP65	10
BL/K2271	LED Outdoor Light - Signal Design	Round	780 lm	12W	6000K	Aluminium · PC	Black	180mm x 135mm x 130 mm	IP65	10

LED Outdoor Wall Light - Aurora Design [230V 50Hz] Non-Dimmable · 3 Year Guarantee

Fitting complete with LED

No Additional Lamp Required



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY MATERIAL	COLOUR	L X D X W (MM)	IP	PCS/CRT
BL/K2245-D	LED Outdoor Wall Light Aurora Design	750 lm	10W	6000K	Aluminium·PC	Black	250mm x 100mm x 100 mm	IP65	10

Bollard • Marine Range [230V 50Hz] · 3 Year Guarantee

Recommended Lamp [Excluded]:
Flash LED A60 E27 Lamp

Lampholder



Bollard
Marine Range
BL/LSG018SS

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	LAMP HOLDER	BODY MATERIAL	COLOUR	DIFFUSER	L X W (MM)	IP	PCS/CRT
BL/LSG018SS	Bollard • Marine Range	40W	E27	Stainless Steel	Satin Chrome	PC Opal	118mm x 450mm	IP44	12

LED Wall Light & Bollard • Brooklyn Design [230V 50Hz]
Non-Dimmable · 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required
Diffuser - PC Opal • Colour - Dark Grey



LED Wall light
BL/TY601-6W



LED Bollards
BL-TY602-6W

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY MATERIAL	L X W (MM)	IP	PCS/CRT
BL/TY601-6W	LED Up/Down Facing Wall Light • Brooklyn • Round	350 lm	6W	6000K	Aluminium	122mm x 100mm x 200mm	IP54	6
BL-TY602-6W	LED Bollard • Brooklyn • Round	350 lm	6W	6000K	Aluminium	100mm x 100mm x 400mm	IP54	6

LED Brick Lights & Step Lights [230V 50Hz] Non-Dimmable · 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required



LED Brick Light
BL/K2149



Up or Down Facing LED Step-Light
BL/K2113



Up or Down Facing LED Step-Light
BL/K2111

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	BODY MATERIAL	COLOUR	DIFFUSER	L X W X H (MM)	PCS/CRT
BL/K2111	Up/Down Facing LED Step-light	150lm	2W	6000K	Die-cast Aluminium	Charcoal	Glass	81mm x 76mm x 63mm	50
BL/K2113	Up/Down Facing LED Step-light	150lm	2W	6000K	Die-cast Aluminium	Charcoal	Glass	81mm x 76mm x 63mm	50
BL/K2149	LED Brick Light	200lm	3W	6000K	Die-cast Aluminium	Charcoal	Glass	110mm x 70mm x 50mm	50

Party Stringlight [230V 50Hz] Non-Dimmable · Power Cable Included · 3 Year Guarantee

9 x E27 Lampholder

Recommended Lamp:

Flash LED Colour Golfball Lamps [Excl.]

Lampholder



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	BODY MATERIAL	COLOUR	LENGTH (MM)	IP
BL/SL10M10	Outdoor Party Stringlight	PVC	Black	10m	IP65



GO SOLAR



Buy Lumens Not Watts



Easy to use in remote areas where there is no electrical grid.



Easy to install and maintain - no need for electrical supply or additional wires.



Reduces maintenance costs and electrical bills.



Free, renewable & environmentally friendly.



Works during loadshedding and power failure.



Scan for more info


[◀ BACK TO CONTENTS PAGE](#)

Solar LED Patio light with Bluetooth Speaker [3.7V 20AH] · 1 Year Guarantee



Key Features

- Maximum 2400 Lumens Output
- Solar Powered
- Bluetooth Speaker for Music
- Magnetic Remote Attaches Anywhere on the Light Pole
- Type-C Charging Port
- USB Output Port
- Rotational Directional Lamp
- Portable Water Tank
- 3 Colour Modes (3000K / 4000K / 6000K)

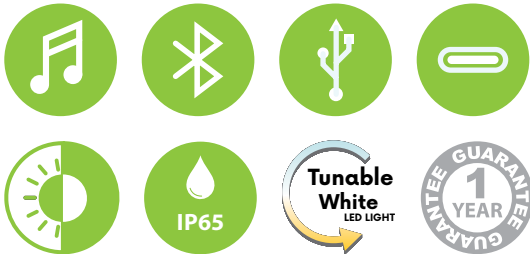

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	HEIGHT (MM)	PCS/CRT
SO-TG-20A-BS	Solar LED Patio light with Bluetooth Speaker	2400lm	24W	3 CCT	ABS	Black	2600mm	1

Solar LED Floodlight · Urban Range · Dimmable · 2 Year Guarantee

With Solar Panel & Remote Control

- Eco-Friendly 100% Green energy | Solar charging system
- Can operate 100% independently without electricity
- 3 Brightness modes: Full / Dim / Auto • 3 Time modes: 2hrs / 4hrs / 6hrs0
- LiFePO4 battery
- Including Mounting Bracket

Available Wattages

1.5W

3W

7W

12W

15W



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L X W (MM)	L X W X H (MM)	PCS/CRT
SO1.5WFL	Solar LED Floodlight	180 lm	1.5W	6500K	ABS	Black	175mm x 155mm	210mm x 10mm x 130mm	20
SO3WFL	Solar LED Floodlight	360lm	3W	6500K	ABS	Black	205mm x 170mm	210mm x 17mm x 200mm	10
SO7WFL	Solar LED Floodlight	840lm	7W	6500K	ABS	Black	255mm x 210mm	300mm x 17mm x 205mm	-
SO12WFL	Solar LED Floodlight	1440lm	12W	6500K	ABS	Black	305mm x 255mm	390mm x 17mm x 230mm	5
SO15WFL	Solar LED Floodlight	1800lm	15W	6500K	ABS	Black	360mm x 300mm	390mm x 17mm x 300mm	5

Solar LED Adjustable Floodlight · Day / Night Sensor · 2 Year Guarantee

With PIR Sensor

- Eco-Friendly 100% Green energy | Solar charging system
- Can operate 100% independently without electricity
- 2 Modes: Sensor Mode / Full Brightmode
- Li-ion battery 3.2V 6000mAh

Wattage

10W



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L X W X H (MM)	IP	PCS/CRT
SOFL10W	Solar LED Adjustable Floodlight	1000lm	10W	6500K	ABS	Black	175mm x 40mm x 155mm	IP65	8

Solar LED Wall Light · Metropolis Range · Dimmable · 2 Year Guarantee

- With Solar Panel & Remote Control
- Wall Mounted / Pole Mounted [Bracket Accessory Incl.]
- Eco-Friendly 100% Green energy
 - Solar charging system
 - Can operate 100% independently without electricity
 - Turn OFF Modes: 3hr / 5hr / 8hr / Auto
 - LiFePO4 battery (10W: 3.2V 18Ah • 18W: 3.2V 36Ah)



Wattage

10W

18W

Dimmable

IP65

2 YEAR

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L X W (MM)	L X W X H (MM)	IP	PCS/CRT
SO10WST	Solar LED Wall Lights	1100 lm	10W	6500K	Die-Cast Aluminium	Grey	490mm x 240mm	520mm x 350mm x 17mm	IP65	4
SO18WST	Solar LED Wall Lights	1800 lm	18W	6500K	Die-Cast Aluminium	Grey	590mm x 240mm	670mm x 350mm x 17mm	IP65	3

Solar LED Wall Light With PIR Sensor · Civic Style · Day / Night Sensor · 2 Year Guarantee

- With PIR Sensor | Including Wall Mounting & Pole Mounting Bracket
- Eco-Friendly 100% Green energy | Solar charging system
 - Can operate 100% independently without electricity
 - 2 Modes: >30% Brightness / <30% Brightness
 - Li-ion battery 3.7V 10.8Ah



Wattage

15W

PIR Sensor

IP65

2 YEAR

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L X W X H (MM)	IP
SOSL15W	Solar LED Wall Light	1500lm	15W	6500K	ABS	Black	490mm x 233mm x 59mm	IP65

Solar LED Wall Light With PIR Sensor · 1 Year Guarantee

With PIR Sensor & Backlight | Eco-Friendly 100% Green energy | Solar charging system
Can operate 100% independently without electricity

Pixie Style

- Modes: On/Off (Light dims when no motion is detected)
- Li-ion battery (1W: 3.7V 500mAh • 2W: 3.7V 2000mAh)



Butterfly Style

- 3 Modes: Off (No motion) / 20% Brightness at Dusk / 3% Brightness with no motion detected
- Li-ion battery (3W: 3.7V 2000mAh • 8W: 3.7V 4000mAh)



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L X W X H (MM)	IP	PCS/CRT
SOF1W/W	Solar LED Wall Lights • Pixie Range	100lm	1W	6500K	ABS	Black	190mm x 95mm x 90mm	IP65	24
SOF1W/B	Solar LED Wall Lights • Pixie Range	100lm	1W	6500K	ABS	White	190mm x 95mm x 90mm	IP65	24
SOF2W/W	Solar LED Wall Lights • Pixie Range	280lm	2W	6500K	ABS	Black	225mm x 13mm x 105mm	IP65	24
SOF2W/B	Solar LED Wall Lights • Pixie Range	280lm	2W	6500K	ABS	White	225mm x 13mm x 105mm	IP65	24
SOB3W/B	Solar LED Wall Lights • Butterfly Range	300lm	3W	6500K	ABS	Black	190mm x 130mm x 100mm	IP65	20
SOB3W/W	Solar LED Wall Lights • Butterfly Range	300lm	3W	6500K	ABS	White	190mm x 130mm x 100mm	IP65	20
SOB8W/B	Solar LED Wall Lights • Butterfly Range	840lm	8W	6500K	ABS	Black	270mm x 220mm x 111mm	IP65	12
SOB8W/W	Solar LED Wall Lights • Butterfly Range	840lm	8W	6500K	ABS	White	270mm x 220mm x 111mm	IP65	12

Solar LED 2-in-1 Garden Light · Habitat Range · Non-Dimmable · 2 Year Guarantee

- Wall Mounted / Garden Spike [Spike Accessory Included]
- Eco-Friendly 100% Green energy | Solar charging system
 - Can operate 100% independently without electricity
 - 3-Step Dimmable: 100% / 75% / 50%
 - Li-ion battery 3.7V 2600mAh

Wattage

1W



IP65



2-in-1 Garden Light
Wall Mounted Spot / Garden Spike

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	COLOUR	L X W (MM)	MATERIAL	IP	PCS/CRT
SO2WSPD	Solar LED Garden Spike	100 lm	1W	6500K	Black	283mm x 315mm (Incl. Spike)	ABS	IP65	36
SO2WSPW	Solar LED Garden Spike	100 lm	1W	3000K	Black	283mm x 315mm (Incl. Spike)	ABS	IP65	36

Solar LED Wall Light · Habitat Range · Non-Dimmable · 2 Year Guarantee

- Wall Mounted
- Eco-Friendly 100% Green energy | Solar charging system
 - Can operate 100% independently without electricity
 - Light dims when no motion is detected
 - Li-ion battery 3.7V 2600mAh

Wattage

2W



IP65



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	COLOUR	L X W X H (MM)	IP	PCS/CRT
SO10WWLD	Solar LED Wall Light	150 lm	1W	6500K	Black	295mm x 88mm x 68mm	IP65	1
SO10WWLW	Solar LED Wall Light	150 lm	1W	3000K	Black	295mm x 88mm x 68mm	IP65	1

Solar LED Garden Spike · Habitat Range · Non-Dimmable · 2 Year Guarantee

Garden Spike with PIR Motion Sensor · Height Extension Accessory - Bollard Style
Eco-Friendly 100% Green energy | Solar charging system

- Can operate 100% independently without electricity
- Light dims when no motion is detected
- Li-ion battery: 3.7V 1500mAh



Garden Spike / Garden Spike with Height Extension Accessory - Bollard Style

Wattage

0.5W



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	COLOUR TEMPERATURE	COLOUR	GARDEN SPIKE (MM)	BOLLARD STYLE (MM)	IP	PCS/CRT
S00.5WBOD	Solar LED Garden Spike	0.5W	6500K	Black	465mm x 105mm	625mm x 105mm	IP65	40
S00.5WBOW	Solar LED Garden Spike	0.5W	3000K	Black	465mm x 105mm	625mm x 105mm	IP65	40

Solar LED Garden Spike · Ambient Lighting · Non-Dimmable · 3 Year Guarantee

For Ambient Lighting

- Eco-Friendly 100% Green energy | Solar charging system
- Operates 100% independently without electricity
- Interior Switch
- 1.2V 40mAh NiMH battery



Example of LED Solar Spike Tray



Willow Style
BL/PGS-PC3-5



Birch Style
BL/PGS-PS02

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	COLOUR TEMPERATURE	COLOUR	L X DIAMETER (MM)	PACKAGING	IP	PCS/CRT
BL/PGS-PC3/5	LED Solar Spike - Willow Style	6500K	Black	295mm x 45mm	24 pcs / Tray	IP65	42
BL/PGS-PS02	LED Solar Spike - Birch Style	6500K	Black	345mm x 57mm	24 pcs / Tray	IP65	42

LED Solar Wall Lamps · Non-Dimmable · 1 Year Guarantee

Eco-Friendly 100% Green energy

- Solar charging system
- Up to 3 days on a single charge
- Can operate 100% independently without electricity
- Motion & Light sensor
- Li-ion battery
- Material - ABS
- Detection Angle - 120°



5W LED Solar Wall Lamp · Astra
BL-SLFMW04W



LED Solar Wall Lamp
BL/SSWL-10B

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	BATTERY	COLOUR	L X W X H (MM)	IP	PCS/CRT
BL-SLFMW04W	LED Solar Lamp · Astra	400 lm	5W	6500K	2600mAh	White	185mm x 118mm x 68mm	IP65	50
BL/SSWL-10B	LED Solar Lamp	200lm	1W	6500K	1200mAh	Black	96mm x 124mm x 48mm	IP54	25

Solar LED Wall Brick Lights · Non-Dimmable · 2 Year Guarantee

With Day/Night Sensor & PIR Sensor | 2 Sensor Modes

- Charging Time: 8hrs | Li-ion battery 3.7V 3000mAh
- Solar charging system | Eco-Friendly 100% Green energy
- Can operate 100% independently without electricity
- Material - ABS + PC (Anti UV)
- Detection Angle - 120°



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	BATTERY	COLOUR	L X W X H (MM)	IP
SOBL6W/W	Solar LED Wall Brick Light	850 lm	6W	6500K	ABS + PC (Anti UV)	White	230mm x 97mm x 43mm	IP65

Solar LED Detachable Wall Light · 2 Year Guarantee

With PIR Sensor & Backlight | Eco-Friendly 100% Green energy | Solar charging system
Can operate 100% independently without electricity



Battery: 3.7V 4000mAh
Charging Time: 8hrs
Cable Length: 3m
2 Light Modes:

- Mode 1: Lights up at full power on motion detection. Light dims turns off after 20 seconds.
- Mode 2: Lights up at full power for 5hrs / battery is on 30%, then switches to Energy Saving Mode.




Detachable Light Module

- Portable
- Hanging Hooks
- Magnetic Base



Adjustable:



TECHNICAL SPECIFICATIONS


ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L X W X H (MM)	IP	PCS/CRT
SOT8W/B	Solar LED Detachable Wall Light	700lm	8W	6500K	ABS & PC	Black	268mm x 214mm x 76mm	IP65	12

Portable Solar LED Lighting System · 2 Year Guarantee

Dual Charging: Solar & USB | 3 Lighting Options: Torch Light, Floodlight & 3 Plug-in Lamps | USB Output Charging Port

Solar

3.7V 14,5Wh Li-ion Batteries
Solar Charging Time: 8 Hours
USB Charging Time: 2 Hours
USB Output Charging Port
Dimensions: 180 x 90 x 60mm
Solar Panel: Polycrystalline 6V, 3W
Dimensions: 240 x 150mm • Cable Length: 3m
Lamp Dimensions: 85 x 60mm • Cable Length: 2.5m

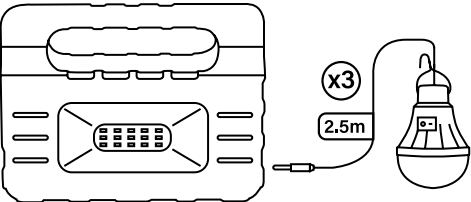

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	TORCH LUMEN	FLOODLIGHT LUMEN	FLOODLIGHT LUMEN	COLOUR TEMPERATURE	MATERIAL	IP
SO/HOMELIGHT	Portable Solar LED Lighting System	80lm	200lm	150lm	6500K	ABS Plastic	IP20

Solar Ambient String Light [3.7V 4000mAH] · 1 Year Guarantee

2 Charging Methods: Solar/USB | Eco-Friendly 100% Green energy
Solar charging system Can operate independently without electricity | Day/Night Sensor
4 Light Modes | Includes 10pcs S14 • G45 LED Bulbs | 5V Solar Panel | 10 M



G45 LED Bulbs
SO/SL10MGW



S14 LED Bulbs
SO/SL10MSW



5V Solar Panel
Garden Spike Included

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	BULB SHAPE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L X W X D (MM)	IP	PCS/CRT
SO/SL10MSW	Solar LED Ambient String Light	S14	2700K	PET Plastic • ABS • PVC	Black	210mm x 133mm x 70mm	IP65	10
SO/SL10MGW	Solar LED Ambient String Light	G45	2700K	PET Plastic • ABS • PVC	Black	210mm x 133mm x 70mm	IP65	10

Portable Solar Kit With LED T-Bulb [3.7V 3000mAH]
1 Year Guarantee

3 Working Modes (High/Medium/Auto) | Includes Solar Panel
with 5M Cable + 3M Bulb Cable | Beam Angle 220° |
5V 3W Monocrystalline Solar Panel



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	MATERIAL	COLOUR	L X W X H (MM)	IP	PCS/CRT
SO4W-HT1	Portable Solar Kit with LED T-Bulb	400lm	4W	6500K	ABS & PC	White	220mm x 135mm x 10mm	IP65	12

SolarLED Fairy Lights [1.2V 600mAH] · 1 Year Guarantee

Solar Charging | Eco-Friendly: 100% Green Energy | Day/Night Sensor
10M | 8 Light Modes | 5V Solar Panel Garden Spike | Working Time: Up to 8 Hours



SO/SL10MWW



SO/SL10MRGB

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LED'S	COLOUR TEMPERATURE	MATERIAL	SOLAR PANEL	L X W (MM)	PCS/CRT
SO/SL10MWW	Solar LED Fairy Lights	10m • 100 LEDS	 2700K	ABS • PVC	Black	67mm x 67mm	200
SO/SL10MRGB	Solar LED Fairy Lights	10m • 100 LEDS	 RGB	ABS • PVC	Black	67mm x 67mm	200

Aluminium Lighting Profiles

All accessories are included with full profile lengths | Additional accessories can be purchased separately
Opal Diffuser • 30% loss of light




3m

Flat Bed - Recessed

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Metal Clips

EX-BK2507D12

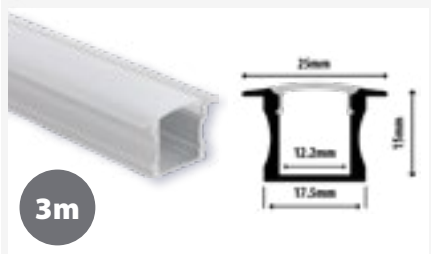

3m

Square Arch - Recessed

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Metal Clips

EX-BK2515




3m

Flat Bed - Surface Mounted

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Metal Clips

EX-BK1707D12B

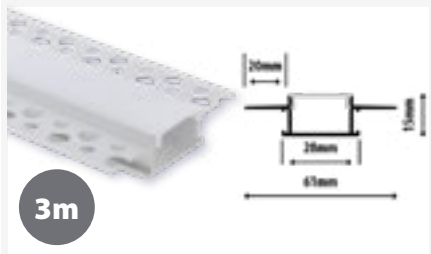


3m

Rectangle - Recessed

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole

EX-BK6114A30

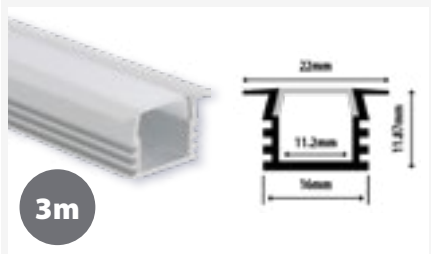

3m

Square Box - Recessed

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Metal Clips

EX-BK221211



2m

Single Block - Recessed

Accessories: 4x Metal Spring Clips,
2x Metal End-Caps


EX-BK653229

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	USE	LENGTH	DIFFUSER	INCLUDED ACCESSORIES
EX-BK2507D12	Flat Bed	Recessed	3m	Opal	2x Metal Clips, 1x End-Cap Without Hole, 1x End-Cap With Hole
EX-BK2515	Square Arch	Recessed	3m	Opal	2x Metal Clips, 1x End-Cap Without Hole, 1x End-Cap With Hole
EX-BK1707D12	Flat Bed	Surface Mounted	3m	Opal	2x Metal Clips, 1x End-Cap Without Hole, 1x End-Cap With Hole
EX-BK6114A30	Rectangle	Recessed	3m	Opal	1x End-Cap Without Hole, 1x End-Cap With Hole
EX-BK221211	Square Box	Recessed	3m	Opal	2x Metal Clips, 1x End-Cap Without Hole, 1x End-Cap With Hole
EX-BK653229	Single Block	Recessed	2m	Opal	4x Metal Spring Clips, 2x Metal End-Caps

All accessories are included with full profile lengths | Additional accessories can be purchased separately
Opal Diffuser • 30% loss of light

Striplights & Profiles



3m

Square Arch • Surface Mounted

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Metal Clips

EX-BK1715B12




3m

Corner Block • Corner Surface Mounted

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Metal Clips

EX-BK161610




3m

Flat Bed • Surface Mounted

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Metal Clips

EX-BK1707D12




3m

Square Box • Surface Mounted

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Metal Clips

EX-BK1911B16




3m

Round Arch • Suspended / Surface Mounted

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Suspension Cables

EX-2027C17



3m

Slim Line Box • Surface Mounted

Accessories: 1x End-Cap Without Hole
1x End-Cap With Hole, 2x Metal Clips


EX-BK1210-8

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	USE	LENGTH	DIFFUSER	INCLUDED ACCESSORIES
EX-BK1715B12	Square Arch	Surface Mounted	3m	Opal	2x Metal Clips, 1x End-Cap Without Hole, 1x End-Cap With Hole
EX-BK161610	Corner Block	Corner Surface Mounted	3m	Opal	2x Metal Clips, 1x End-Cap Without Hole, 1x End-Cap With Hole
EX-BK1707D12	Flat Bed	Surface Mounted	3m	Opal	2x Metal Clips, 1x End-Cap Without Hole, 1x End-Cap With Hole
EX-BK1911B16	Square Box	Surface Mounted	3m	Opal	2x Metal Clips, 1x End-Cap Without Hole, 1x End-Cap With Hole
EX-2027C17	Round Arch	Suspended / Surface Mounted	3m	Opal	2x Suspension Cables, 1x End-Cap Without Hole, 1x End-Cap With Hole
EX-BK1210-8	Slim Line Box	Surface Mounted	3m	Opal	2x Metal Clips, 1x End-Cap Without Hole, 1x End-Cap With Hole

Aluminium Lighting Profiles

All accessories are included with full profile lengths | Additional accessories can be purchased separately
Opal Diffuser • 30% loss of light



2m

Double Block with Built-In Tray · Suspended / Surface Mounted
Accessories: 2 x Surface Mount Bracket,
2 x Suspension Cables, 2 x Metal End-Caps

EX-BK5075-29



3m

Single Block · Suspended / Surface Mounted
Accessories: 2x Suspension Cables, 2x Metal End-Caps

EX-BK5032393



3m

Rectangle Block · Surface Mounted
Accessories: 2 x Suspension Cables,
2 x Metal End-Cap

EX-BK3535-32



3m

Rectangle Block w/ Wings · Recessed
Accessories: 4 x Metal Spring Clips,
2 x End-Caps Without Hole

EX-BK5035-32



3m

Corner Block · Surface Mounted
Accessories: 2x Corner Block Diffuser

EX-BK6060X17

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	USE	LENGTH	DIFFUSER	INCLUDED ACCESSORIES
EX-BK5075-29	Double Block with Built-In Tray	Suspended / Surface Mounted	2m	Opal	2 x Surface Mount Bracket , 2 x 1m Suspension Cables, 2 x Metal End-Caps
EX-BK5032393	Single Block	Suspended / Surface Mounted	3m	Opal	2 x 1m Suspension Cables, 2x Metal End-Caps
EX-BK3535-32	Rectangle Block	Surface Mounted	3m	Opal	4 x Metal Spring Clips, 2 x Metal End-Cap
EX-BK5035-32	Rectangle Block with Wings	Recessed	3m	Opal	4 x Metal Spring Clips, 2 x End-Caps Without Hole, 2 x Hanging Wires
EX-BK6060X17	Corner Block	Surface Mounted	3m	Opal	2x Corner Block Diffuser

LED Striplights [220V DC] Non-Dimmable · 3 Year Guarantee
Outdoor IP65 | Use with: Striplight Power Supply [Excluded]

Striplights & Profiles



LED Striplight



Striplight Power Supply

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATT/METRE	VOLTAGE	COLOUR TEMPERATURE	L X W ((MM)	IP	PCS/CRT
SH60C-IP65W	LED Striplight	4.5W	220V DC	 3000K	5m x 8mm	IP65	20
SH60C-IP65D	LED Striplight	4.5W	220V DC	 6000K	5m x 8mm	IP65	20
SH60C-IP65B	LED Striplight	4.5W	220V DC	 Blue	5m x 8mm	IP65	20
SHPS-220V	Striplight Power Supply	N/A	220V 50Hz	N/A	N/A	IP20	24

FLASH™

Striplights & Profiles


LED Strip-Lights [12V] • Outdoor • 3 Year Guarantee

Power Supply Excluded | Self-Adhesive Backing
Not to be submerged in water

*Cut Points (on dotted line):
60 LED - 50mm increments • 120 LED - 30mm increments



Strip-Light • IP65 • 120 LED



Strip-Light • IP65 • 60 LED



5m Roll



50m Roll

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE/ROLL	LED/METRE	WATT/METRE	VOLTAGE	COLOUR TEMPERATURE	LENGTH (MM)	IP	PKG	PCS/CRT
SL60C-IP65W	LED Striplight	22.5W	60 LED / m	4.5W / m	12V DC	3000K	5m	IP65	Box	40
SL60C-IP65C	LED Striplight	22.5W	60 LED / m	4.5W / m	12V DC	4000K	5m	IP65	Box	40
SL60C-IP65D	LED Striplight	22.5W	60 LED / m	4.5W / m	12V DC	6000K	5m	IP65	Box	40
SL60C-IP65B	LED Striplight	22.5W	60 LED / m	4.5W / m	12V DC	Blue	5m	IP65	Box	40
SL60B-IP65W	LED Striplight	225W	60 LED / m	4.5W / m	12V DC	3000K	50m	IP65	Box	10
SL60B-IP65C	LED Striplight	225W	60 LED / m	4.5W / m	12V DC	4000K	50m	IP65	Box	10
SL60B-IP65D	LED Striplight	225W	60 LED / m	4.5W / m	12V DC	6000K	50m	IP65	Box	10
SL120C-IP65W	LED Striplight	45W	120 LED / m	9W / m	12V DC	3000K	5m	IP65	Box	40
SL120C-IP65C	LED Striplight	45W	120 LED / m	9W / m	12V DC	4000K	5m	IP65	Box	40
SL120C-IP65D	LED Striplight	45W	120 LED / m	9W / m	12V DC	6000K	5m	IP65	Box	40
SL120B-IP65W	LED Striplight	450W	120 LED / m	9W / m	12V DC	3000K	50m	IP65	Box	10
SL120B-IP65C	LED Striplight	450W	120 LED / m	9W / m	12V DC	4000K	50m	IP65	Box	10
SL120B-IP65D	LED Striplight	450W	120 LED / m	9W / m	12V DC	6000K	50m	IP65	Box	10

FLASH™

Striplights & Profiles

LED Strip-Lights [12V DC] • Indoor • 3 Year Guarantee
Power Supply Excluded | Self-Adhesive Backing

*Cut Points (on dotted line):
60 LED - 50mm increments • 120 LED - 30mm increments



Strip-Light • IP20 • 60 LED



Strip-Light • IP20 • 120 LED



5m Roll



50m Roll

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE/ROLL	LED/METRE	WATT/METRE	VOLTAGE	COLOUR TEMPERATURE	LENGTH (MM)	IP	PKG	PCS/CRT
SL60C-IP20W	LED Striplight Roll	22.5W	60 LED / m	4.5W / m	12V DC	3000K	5m	IP20	Box	40
SL60C-IP20C	LED Striplight Roll	22.5W	60 LED / m	4.5W / m	12V DC	4000K	5m	IP20	Box	40
SL60C-IP20D	LED Striplight Roll	22.5W	60 LED / m	4.5W / m	12V DC	6000K	5m	IP20	Box	40
SL60B-IP20W	LED Striplight Roll	225W	60 LED / m	4.5W / m	12V DC	3000K	50m	IP20	Box	10
SL60B-IP20C	LED Striplight Roll	225W	60 LED / m	4.5W / m	12V DC	4000K	50m	IP20	Box	10
SL60B-IP20D	LED Striplight Roll	225W	60 LED / m	4.5W / m	12V DC	6000K	50m	IP20	Box	10
SL120C-IP20W	LED Striplight Roll	45W	120 LED / m	9W / m	12V DC	3000K	5m	IP20	Box	40
SL120C-IP20C	LED Striplight Roll	45W	120 LED / m	9W / m	12V DC	4000K	5m	IP20	Box	40
SL120C-IP20D	LED Striplight Roll	45W	120 LED / m	9W / m	12V DC	6000K	5m	IP20	Box	40
SL120B-IP20W	LED Striplight Roll	450W	120 LED / m	9W / m	12V DC	3000K	50m	IP20	Box	10
SL120B-IP20C	LED Striplight Roll	450W	120 LED / m	9W / m	12V DC	4000K	50m	IP20	Box	10
SL120B-IP20D	LED Striplight Roll	450W	120 LED / m	9W / m	12V DC	6000K	50m	IP20	Box	10

FLATMOH

Striplights & Profiles

LED RGB Striplights [230V 50Hz] · 3 Year Guarantee

Remote Control & Power Supply Included



LED RGB Striplight Kit & Remote

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATT/METRE	VOLTAGE	COLOUR TEMPERATURE	LENGTH ((MM))	IP	PCS/CRT
SL30K-IP65RGB	LED RGB Striplight Kit	4.5W / m	220V 50Hz	 RGB	5m	IP65	20

LED COB Striplights [24V DC] Non-dimmable · 3 Year Guarantee
With Self-Adhesive Backing



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MAX LUMEN/METRE	WATT/METRE	VOLTAGE	COLOUR TEMPERATURE	LENGTH ((MM))	IP
SL-COBIP20W	LED Striplight	520lm / m	7W / m	24V DC	 3000K	5m	IP20
SL-COBIP20D	LED Striplight	520lm / m	7W / m	24V DC	 6000K	5m	IP20
SL-COBIP20CW	LED Striplight	520lm / m	7W / m	24V DC	 4000K	5m	IP20
SL-COBIP20WW	LED Striplight	520lm / m	7W / m	24V DC	 3000K	50m	IP20

UNDERSTANDING LIGHTING

An Educational Guide Into Lighting Basics & Basic Lighting Features



FREE FOR FLASH CLIENTS

Indoor & Outdoor Motion Sensors

[230V 50Hz] · 3 Year Guarantee

Electrical
Accessories



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	VOLTAGE	DETECTION ANGLE	MATERIAL	COLOUR	L X W (MM)	IP	PCS/CRT
PR/SA003DW	Infrared 180° Motion Sensor	Max 1200W	230V 50Hz	180°	PC	White	210mm x 85mm	IP44	50
PR/SA003DB	Infrared 180° Motion Sensor	Max 1200W	230V 50Hz	180°	PC	Black	210mm x 85mm	IP44	50
PR/SA003GW	Infrared 120° x 360° Motion Sensor	Max 1200W	230V 50Hz	120° x 360°	PC	White	100mm	IP20	50

Components › LED Drivers [230V 50Hz]

Electrical
Accessories



12V LED Driver • 15W
DR/MU38-2



12V LED Driver • 150W
DR/MU150W



24V LED Driver • 30W
DR/MS30-12



LED Driver • 6W
DR/MU38-3

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	INPUT VOLTAGE	OUTPUT VOLTAGE	L X W X D (MM)	IP	PCS/CRT
DR/MU38-3	LED Driver	6W	230V 50Hz	12V DC	40mm x 40mm	IP20	100
DR/MU38-2	LED Driver	15W	230V 50Hz	12V DC	113mm x 42mm	IP20	100
DR/MS30-12	LED Driver	30W	230V 50Hz	12V DC	88mm x 58mm	IP20	50
DR/S60-12	LED Driver	60W	230V 50Hz	12V DC	110mm x 77mm	IP20	60
DR/MU100W	LED Driver	100W	230V 50Hz	12V DC	128mm x 97mm	IP20	50
DR/MU150W	LED Driver	150W	230V 50Hz	12V DC	160mm x 97mm	IP20	50
DR/MU200W	LED Driver	200W	230V 50Hz	12V DC	160mm x 97mm	IP20	40
DR/GS24V30W	LED Driver	30W	110/220V 50Hz	24V DC	110mm x 77mm	IP20	50
DR/GS24V60W	LED Driver	60W	110/220V 50Hz	24V DC	110mm x 77mm	IP20	100
DR/GS24V120W	LED Driver	120W	220V 50Hz	24V DC	200mm x 93mm	IP20	50
DR/GS24V240W	LED Driver	240W	230V 50Hz	24V DC	197mm x 110mm	IP20	36
DR/HLB-50W	LED Driver with Connector	50W	230V 50Hz	38 - 54V DC	130mm x 44mm	IP66	50
DR/HLB-100W	LED Driver with Connector	100W	230V 50Hz	38 - 54V DC	178mm x 70mm	IP66	50

Day / Night Sensors [230V 50Hz] · 3 Year Guarantee



Day / Night Sensor - 25A
PR/DNS25A



Day / Night Sensor - 10A
PR/DNS10A

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	CURRENT	VOLTAGE	AMBIENT LIGHT	WORKING TEMP	H X W X D (MM)	HEIGHT INCLUDING BRACKET	IP	PCS/CRT
PR/DNS25A	Day / Night Sensor	25A	230V 50Hz	< 5-50 Lux	-20°C to +40°C	75mm x 80mm	120mm	IP65	50
PR/DNS10A	Day / Night Sensor	10A	230V 50Hz	< 5-50 Lux	-20°C to +40°C	75mm x 80mm	120mm	IP65	50

GU10 Lampholders [230V 50Hz]



GU10 Lampholder with Bracket
DL/GU10/BR



GU10 Ceramic Lampholder
DL/GU10/LH

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LAMP HOLDER	MAX WATTAGE	VOLTAGE	WIRE/CORD LENGTH	L X W X D (MM)	PCS/CRT
DL/GU10/BR	GU10 Lampholder with Bracket	GU10	100W	230V 50Hz	0.5mm ² Copper	185mm x 33mm	120
DL/GU10/LH	GU10 Ceramic Lampholder	GU10	100W	230V 50Hz	0.5mm ² Copper	200mm x 28mm	700

Wireless Door Bell [Battery Operated] · 3 Year Guarantee

Electrical
Accessories



- Flashing Light
 - 3 Different Volume Levels
 - 16 Different Ringtones
- Transmitter: LR23 Alkaline Battery Included
Recommended Receiver Battery [Excluded]:
2 x AAA Flash Alkaline Batteries



Wireless Doorbell with Flashing Light

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	RECIEVER	TRANSMITTER	SIGNAL RANGE	MATERIAL	COLOUR	L X W X D (MM)	PCS/CRT
DB/8516D	Wireless Doorbell with Flashing Light	2 x AAA	1 x LR23	20+ Meters	Plastic	White & Blue	Receiver - 90mm x 35mm Transmitter - 95mm x 65mm	60

Surge Protector Multiplugs [230V 50Hz] · 1 Year Guarantee

- Overload Protection: 16A
- Max Surge Protection: 450J
- Surge Protection: 3.6Kv
- Max Peak Surge Current: 13500A
- Rating: 16A 3680W
- SA 3 Pin Plug
- Cable Length: 500mm
- Wall Mountable



XH-SAS321



XH-SAS322U



XH-SAS211



XH-SAS212U



XH-SAS541



XH-SAS542U



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	PACKAGING	L X D X W (MM)	IP
XH-SAS321	6 Way Surge Protected Multiplug	Polypropylene (PP) Fire Retardant	Colour Box	200 x 37 x 100mm	IP20
XH-SAS322U	5 Way Surge Protected Multiplug with 2 x USB Ports	Polypropylene (PP) Fire Retardant	Colour Box	200 x 37 x 100mm	IP20
XH-SAS211	4 Way Surge Protected Multiplug	Polypropylene (PP) Fire Retardant	Colour Box	250 x 37 x 60mm	IP20
XH-SAS212U	3 Way Surge Protected Multiplug with 2 x USB Ports	Polypropylene (PP) Fire Retardant	Colour Box	250 x 37 x 60mm	IP20
XH-SAS541	10 Way Surge Protected Multiplug	Polypropylene (PP) Fire Retardant	Colour Box	300 x 37 x 100mm	IP20
XH-SAS542U	9 Way Surge Protected Multiplug with 2 x USB Ports	Polypropylene (PP) Fire Retardant	Colour Box	300 x 37 x 100mm	IP20

Multiplugs [230V 50Hz] · 1 Year Guarantee

- Overload Protection: 16A
- Rating: 16A 3680W
- SA 3 Pin Plug
- Cable Length: 500mm
- Wall Mountable



XH-SA321



XH-SA322U



XH-SA211



XH-SA212U



XH-SA541



XH-SA542U



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	PACKAGING	L X D X W (MM)	IP
XH-SA321	6 Way Multiplug	Polypropylene (PP) Fire Retardant	Hanging Polybag	200 x 37 x 100mm	IP20
XH-SA322U	5 Way Multiplug with 2 x USB Ports	Polypropylene (PP) Fire Retardant	Hanging Polybag	200 x 37 x 100mm	IP20
XH-SA211	4 Way Multiplug	Polypropylene (PP) Fire Retardant	Hanging Polybag	250 x 37 x 60mm	IP20
XH-SA212U	3 Way Multiplug with 2 x USB Ports	Polypropylene (PP) Fire Retardant	Hanging Polybag	250 x 37 x 60mm	IP20
XH-SA541	10 Way Multiplug	Polypropylene (PP) Fire Retardant	Hanging Polybag	300 x 37 x 100mm	IP20
XH-SA542U	9 Way Multiplug with 2 x USB Ports	Polypropylene (PP) Fire Retardant	Hanging Polybag	300 x 37 x 100mm	IP20

Multiplugs and Adapters [230V 50Hz] · 1 Year Guarantee

Electrical
Accessories



BA-F01-5M



BA-F01-3M



FL-F03-A013



FL-F03-A005



FL-F03-A006



FL-F03-A016



FL-F03-A15

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	PACKAGING	COLOUR	IP	PCS/CRT
BA-F01-3M	2 Way Janus Coupler	Polypropylene (PP) Fire Retardant	Hanging Polybag	Black	IP20	150
BA-F01-5M	2 Way Janus Coupler	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	150
FL-F03-A013	Multiplug • Slim 2-Pin (5A) + Shuko Socket	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	360
FL-F03-A005	Shuko Plug Adapter	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	360
FL-F03-A006	Standard 3-Pin Plug	Polypropylene (PP) Fire Retardant	Hanging Polybag	Black	IP20	360
FL-F03-A016	Standard 3-Pin Plug	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	360
FL-F03-A15	Multiplug • 3 x Slim 2-Pin (5A) + Shuko Socket	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	240



FL-F03-A088



FL-03-A008



FL-F03-A108



FL-F03-A112



FL-F03-A110



FL-F03-A011

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	PACKAGING	COLOUR	IP	PCS/CRT
FL-F03-A088	Multiplug • 16A	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	240
FL-03-A008	Multiplug • 2 x 16A	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	210
FL-F03-A108	Multiplug Adapter • 2 x 16A + USB + Type C	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	120
FL-F03-A112	Multiplug Adapter • 16A + Schuko + 5A + USB + Type C	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	120
FL-F03-A110	Multiplug Adapter • 3 x 16A + 3 x 5A + USB + Type C	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	100
FL-F03-A011	Multiplug Adapter • 16A + 3 x Slim 2-Pin (5A)	Polypropylene (PP) Fire Retardant	Hanging Polybag	White	IP20	180

Wall Switches and Sockets [230V 50Hz] · 1 Year Guarantee

Electrical
Accessories



SNA-101



SNA-201



SNA-301



SNA-401



SNA-BP2



SNA-102



SNA-202



SNA-302



SNA-402

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	MEASUREMENTS	PACKAGING	COLOUR	IP	PCS/CRT
SNA-101	1 Lever 1 Way Switch	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	100
SNA-201	2 Lever 1 Way Switch	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	100
SNA-301	3 Lever 1 Way Switch	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	100
SNA-401	4 Lever 1 Way Switch	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	100
SNA-BP2	Blank Plate Switch	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	200
SNA-102	1 Lever 2 Way Switch	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	200
SNA-202	2 Lever 2 Way Switch	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	200
SNA-302	3 Lever 2 Way Switch	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	200
SNA-402	4 Lever 2 Way Switch	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	200



SNA-150E3



SNA-160U



SNA-180USB



SNA-BP4



SNA-120S



SNA-130S



SNA-140S



SNA-150E1



SNA-150E2

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	MEASUREMENTS	PACKAGING	COLOUR	IP	PCS/CRT
SNA-120S	Single Socket	Polypropylene (PP) Fire Retardant	4X2	Hanging Polybag	White	IP20	200
SNA-130S	Single Socket	Polypropylene (PP) Fire Retardant	4X4	Hanging Polybag	White	IP20	200
SNA-140S	Double Socket	Polypropylene (PP) Fire Retardant	4X4	Hanging Polybag	White	IP20	200
SNA-150E1	16A + EURO Socket	Polypropylene (PP) Fire Retardant	4X4	Hanging Polybag	White	IP20	200
SNA-150E2	16A + 2 EURO Sockets	Polypropylene (PP) Fire Retardant	4X4	Hanging Polybag	White	IP20	200
SNA-150E3	16A + 3 EURO Sockets	Polypropylene (PP) Fire Retardant	4X4	Hanging Polybag	White	IP20	200
SNA-160EU	16A + EURO + Shuko Sockets	Polypropylene (PP) Fire Retardant	4X4	Hanging Polybag	White	IP20	200
SNA-180USB	16A + EURO Socket + USB + Type C Port	Polypropylene (PP) Fire Retardant	4X4	Hanging Polybag	White	IP20	80
SNA-BP4	Blank Plate	Polypropylene (PP) Fire Retardant	4X4	Hanging Polybag	White	IP20	200

Surge Protector Adaptors [230V 50Hz] · 1 Year Guarantee

- Overload Protection: 16A
- Max Surge Protection: 450J
- Surge Protection: 3.6Kv
- Rating: 16A 3680W
- SA 3 Pin Plug
- Packaging: Colour Box



XH-SAS1003




XH-SAS1003U

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	PACKAGING	L X D X W (MM)	IP
XH-SAS1003	2 Way Adapter Plug	Polypropylene (PP) Fire Retardant	Colour Box	200 x 37 x 100mm	IP20
XH-SAS1003U	2 Way Adapter Plug with 2 USB Ports & Type C Port	Polypropylene (PP) Fire Retardant	Colour Box	200 x 37 x 100mm	IP20

Extention Cords [230V 50Hz] · 1 Year Guarante

2 Way: 2 x 3 Pin Socket (10A)

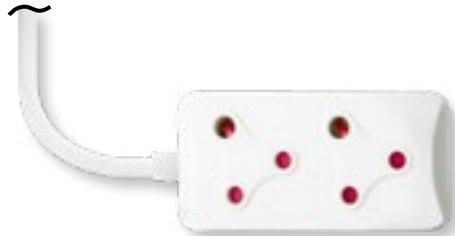

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	PACKAGING	LENGTH (MM)	IP
XH-SA02	Extention Cord	Polypropylene (PP) Fire Retardant	Hanging Polybag	3m	IP20
XH-SA22	Extention Cord	Polypropylene (PP) Fire Retardant	Hanging Polybag	5m	IP20
XH-SA33	Extention Cord	Polypropylene (PP) Fire Retardant	Hanging Polybag	10m	IP20

12V Lead-Acid Battery

Can be used for: Alarm systems, Electronic gates, Electronic garage doors, 12V Lighting products & Small UPS (uninterrupted power supply) systems.



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	NOMINAL VOLTAGE	NOMINAL CAPACITY	CHARGING VOLTAGE (FLOAT USE)	CHARGING VOLTAGE (CYCLE USE)	INITIAL CURRENT
GB/12V7AH	Lead-Acid Battery	12V	7Ah/20HR	13.5~13.8V	14.4~14.7V	≤ 2.1A

IP65 Inline Connectors • 3 Way Block Connectors

Used for insuring watertight electrical connections to outdoor fittings.



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	VOLTAGE	CABLE DIAMETRE (MM)	CROSS SECTION AREA (MM)	MATERIAL	HOUSING L X D (MM)	PCS/CRT
FC/M685B	Inline Connector • Clip-in Connector Block	24A 230VAC	8mm -12mm	0.5mm ² - 4mm ²	Plastic (PA66)	104mm x 32mm	336
FC/M684B	Inline Connector • Screw-in Connector Block	16A 230VAC	5mm - 9mm	0.5mm ² - 1.5mm ²	Plastic (PA66)	77mm x 25.5mm	462
FC/M682B	Inline Connector • Screw-in Connector Block	9A 230VAC	4mm - 8mm	0.5mm ² - 0.75mm ²	Plastic (PA66)	64mm x 18mm	600

IP65 Inline Connectors • 3 Way Block Connectors

Used for insuring watertight electrical connections to outdoor fittings.



FC/M684-H



FC/M684-X



FC/M684-T



FC/M20



FC/M686-4C2



FC/M686-3A

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	VOLTAGE	CABLE DIAMETRE (MM)	CROSS SECTION AREA (MM)	MATERIAL	HOUSING L X D x W (MM)	PCS/CRT
FC/M684-H	10pcs • H Inline Connector • Clip-in Connector Block	9A 230VAC	4-8mm	0.5mm ² - 4mm ²	Plastic (PA66)	120mm x 65mm x 27mm	120
FC/M684-X	10pcs • Cross Inline Connector • Clip-in Connector Block	9A 230VAC	4-8mm	0.5-1.5mm ²	Plastic (PA66)	120mm x 120mm x 27mm	60
FC/M684-T	10pcs • T Inline Connector • Connector Block	9A 230VAC	4-8mm	0.5-1.5mm ²	Plastic (PA66)	120mm x 110mm x 27mm	120
FC/M686-4C2	1pc • 4-Way Junction Box • Connector Block Excluded	9A 230VAC	4-8mm	0.5-1.5mm ²	Plastic (PA66)	90mm x 125mm x 36mm	100
FC/M686-3A	1pc • 3-Way Junction Box • Connector Block Excluded	9A 230VAC	4-8mm	0.5-1.5mm ²	Plastic (PA66)	80mm x 125mm x 36mm	160
FC/M20-RJ	40pcs • Rubber Glands • Junction Box	N/A	6-11mm	1.5-2.5mm ²	Plastic (PA66)	N/A	800
FC/M20-R	2pcs • Rubber Glands • Inline Connectors	N/A	6-11mm	1.5-2.5mm ²	Plastic (PA66)	N/A	800

PVC Insulating Tape

- Durable and Reliable
- Strong elasticity and retractability
- Easy to tear and apply
- SGS German test and apply
- For use up to 600V
- Flame-Retardant
- Heat Resistant to 80°C



F/IT20MR



F/IT20MG



F/IT20MW



F/IT20MY



F/IT20MBL



F/IT5MB



F/IT10MB



F/IT20MB

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	THICKNESS	WIDTH	LENGTH	COLOUR	PCS/CRT
F/IT5MB	PVC Insulating Tape	0.18mm	18mm	5m	Black	50
F/IT10MB	PVC Insulating Tape	0.18mm	18mm	10m	Black	50
F/IT20MB	PVC Insulating Tape	0.18mm	18mm	20m	Black	20
F/IT20MR	PVC Insulating Tape	0.18mm	18mm	20m	Red	20
F/IT20MG	PVC Insulating Tape	0.18mm	18mm	20m	Green	20
F/IT20MW	PVC Insulating Tape	0.18mm	18mm	20m	White	20
F/IT20MY	PVC Insulating Tape	0.18mm	18mm	20m	Yellow	20
F/IT20MBL	PVC Insulating Tape	0.18mm	18mm	20m	Blue	20

Terminal Blocks



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	PCS PER PACK	SHAPE	AMPS	COLOUR	BLOCK (MM)	PCS/CRT
TB/5A6MM	Terminal Blocks	10	H Type	5A	Black	6mm	1000
TB/15A12MM	Terminal Blocks	10	H Type	15A	Black	12mm	500
TB/30A16MM	Terminal Blocks	10	H Type	30A	Black	16mm	300
TB/15A12MMW	Terminal Blocks	10	H Type	15A	White	12mm	500
TB/30A16MMW	Terminal Blocks	10	H Type	30A	White	16mm	300

Foldable Pocket Knife

- Features:
- Trigger
 - Pocket Clip
 - Lanyard Hole



Packaging



Foldable Pocket Knife

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	PACKAGING	FOLDED L X W (MM)	BLADE LENGTH (MM)
TL/KNF-G1	Foldable Pocket Knife	Stainless Steel	Blister Pack	125mm	90mm

11-in-1 Multi-Tool with Carry Pouch

- Features:
- Long nose pliers
 - Regular pliers
 - Hard-wire cutters
 - Small flat head driver
 - Medium flat head driver
 - Can Opener
 - Wire Stripper
 - 2 Cross Drive
 - Knife
 - Awl - Hole maker
 - File



Packaging



11 in 1 Multitool + Carry Pouch

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MATERIAL	PACKAGING	L X W (MM)	FOLDED L X W (MM)
TL/MLT-S1	Multi-Tool with Carry Pouch · Stainless Steel	Stainless Steel	Blister Pack	160mm x 60mm	100mm x 48mm

Individual Screwdrivers

- Chromium-Vanadium (CR-V) Steel
- Ergonomic Thermoplastic Rubber Grip
- Magnetic Tip
- Hardness: HRC 50–56



Screwdriver (Not Insulated)



VDE Certified Screwdriver (Insulated)

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SIZE	MATERIAL	HANDLE MATERIAL	INSULATION	HARDNESS RATING
901PH075	Phillips Screwdriver	Phillips: PH0 x 75mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
901PH1100	Phillips Screwdriver	Phillips: PH1 x 100mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
901PH2150	Phillips Screwdriver	Phillips: PH2 x 150mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
9013075	Slotted Screwdriver	Slotted: 0.5 x 3.0 x 75mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
90140100	Slotted Screwdriver	Slotted: 0.8 x 4.0 x 100mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
90155100	Slotted Screwdriver	Slotted: 1.0 x 5.5 x 125mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
90165150	Slotted Screwdriver	Slotted: 1.2 x 6.5 x 150mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
901PZ075	Pozidriv Screwdriver	Pozidriv: PZ0 x 75mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
901PZ1100	Pozidriv Screwdriver	Pozidriv: PZ1 x 100mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
901PZ2150	Pozidriv Screwdriver	Pozidriv: PZ2 x 150mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
901PH238	Stubby Screwdriver	Phillips: PH2 x 38mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
9016538	Stubby Screwdriver	Slotted: 1.2 x 6.5 x 38mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
901PZ238	Stubby Screwdriver	Pozidriv: PZ2 x 38mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
901060EH	VDE Insulated Screwdriver	Phillips: PH0 x 60mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	VDE Certified Screwdriver	HRC 50–56
901180EH	VDE Insulated Screwdriver	Phillips: PH1 x 80mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	VDE Certified Screwdriver	HRC 50–56
9012100EH	VDE Insulated Screwdriver	Phillips: PH2 x 100mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	VDE Certified Screwdriver	HRC 50–56
9013075E	VDE Insulated Screwdriver	Slotted: 0.5 x 3.0 x 75mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	VDE Certified Screwdriver	HRC 50–56
90140100E	VDE Insulated Screwdriver	Slotted: 0.8 x 4.0 x 100mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	VDE Certified Screwdriver	HRC 50–56
90155125E	VDE Insulated Screwdriver	Slotted: 1.0 x 5.5 x 125mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	VDE Certified Screwdriver	HRC 50–56
90165150E	VDE Insulated Screwdriver	Slotted: 1.2 x 6.5 x 150mm	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	VDE Certified Screwdriver	HRC 50–56

Screwdriver & Bit Sets



8-Piece VDE Insulated Screwdriver Set

- Includes:
- Phillips: PH0 x 60mm
 - Phillips: PH1 x 80mm
 - Phillips: PH2 x 100mm
 - Slotted: 0.4 x 2.5 x 75mm
 - Slotted: 0.8 x 4.0 x 100mm
 - Slotted: 1.0 x 5.5 x 125mm
 - Slotted: 1.2 x 6.5 x 150mm
 - Voltage Tester:
125 - 250V 140mm

Item Number: 901080E



10-Piece Screwdriver Set

- Includes:
- Phillips: PH1 x 100mm
 - Phillips: PH2 x 125mm
 - Slotted: 1.0 x 5.5 x 100mm
 - Slotted: 1.2 x 6.5 x 125mm
 - Pozidriv: PZ1 x 100mm
 - Pozidriv: PZ2 x 125mm
 - Torx: T20 x 100mm
 - Torx: T25 x 125mm
 - VDE: 0.8 x 4.0 x 100mm
 - Voltage Tester:
125 - 250V 140mm

Item Number: 901-10



6-Piece Screwdriver Set

- Includes:
- Slotted: 5.5 x 75mm
 - Slotted: 6.5 x 100mm
 - Slotted: 8.0 x 150mm
 - Phillips: PH1 x 75mm
 - Phillips: PH2 x 100mm
 - Phillips: PH3 x 150mm

Item Number: 901063

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SET QUANTITY	MATERIAL	HANDLE MATERIAL	INSULATION	HARDNESS RATING
901063	6-Piece Screwdriver Set	6	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
901080E	8-Piece VDE Insulated Screwdriver Set	8	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	All VDE Certified Screwdrivers	HRC 50–56
901-10	10-Piece Screwdriver Set	10	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	1 x VDE Certified Screwdriver	HRC 50–56

Hardware



10pc Bit Sets

Item Numbers:
BTZ12510C
BTZ22510C
BTZ15010C
BTZ25010C

21-Piece Screwdriver & Bit Set

Includes:

- 2 x Slotted Screwdrivers
- 2 x Phillips Screwdrivers
- 2 x Pozidriv Screwdrivers
- 2 x Slotted Precision Screwdrivers
- 2 x Phillips Precision Screwdrivers
- 75mm Bit Holder
- 2 x Slotted Bits
- 2 x Phillips Bits
- 2 x Pozidriv Bits
- 2 x Torx Bits
- 2 x Hex Bits

Item Number: 9011003

100-Piece Screwdriver & Bit Set

Includes:

- 6 x Slotted Screwdrivers
- 6 x Phillips Screwdrivers
- 3 x Torx Screwdrivers
- 3 x Pozidriv Screwdrivers
- 3 x Square Screwdrivers
- 2 x Slotted Precision Screwdrivers
- 2 x Phillips Precision Screwdrivers
- 4 x Torx Precision Screwdrivers
- SL5-PH1 Offset Screwdriver
- SL6-PH2 Offset Screwdriver
- Ratchet Screwdriver
- 6 x Nut Drivers
- 10 x Slotted Bits
- 10 x Phillips Bits
- 10 x Pozidriv Bits
- 10 x Torx Bits
- 10 x Hex (mm) Bits
- 6 x Hex (SAE) Bits
- 4 x Square Bits

Item Number: 9011003

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SET QUANTITY	MATERIAL	HANDLE MATERIAL	INSULATION	HARDNESS RATING
901210	21-Piece Screwdriver & Bit Set	21	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	Not Insulated	HRC 50–56
9011003	100-Piece Screwdriver & Bit Set	100	Chrome Vanadium (CR-V) Steel	Thermoplastic Rubber (TPR)	2 x VDE Certified Screwdrivers	HRC 50–56
BTZ12510C	10pc Bit Set - Pozidriv: PZ1 x 25mm	10	S2 Steel Alloy	N/A	N/A	HRC 56-62
BTZ22510C	10pc Bit Set - Pozidriv: PZ2 x 25mm	10	S2 Steel Alloy	N/A	N/A	HRC 56-62
BTZ15010C	10pc Bit Set - Pozidriv: PZ1 x 50mm	10	S2 Steel Alloy	N/A	N/A	HRC 56-62
BTZ25010C	10pc Bit Set - Pozidriv: PZ2 x 50mm	10	S2 Steel Alloy	N/A	N/A	HRC 56-62

Spirit Levels

- 3 High Accuracy Vials: 90° / 180° / 45°
- Anti-shock Proof End Cap
- Milled Bottom Surface
- 90° Top View Window.



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	DIMENSION	VIALS	ACCURACY	COLOUR
PS27B-30CM	Spirit Level	12"/30cm	3	1.0 mm/m	Black
PS27B-60CM	Spirit Level	12"/60cm	3	1.0 mm/m	Black
PS27B-100CM	Spirit Level	12"/100cm	3	1.0 mm/m	Black
PS27B-120CM	Spirit Level	12"/120cm	3	1.0 mm/m	Black
PS27B-150CM	Spirit Level	12"/150cm	3	1.0 mm/m	Black

Torpedo Magnet Level

- 3 High Accuracy Vials: 90° / 180° / 45°
- Magnetic base allows for hands-free use on metal structures
- Aluminium reinforced frame • Tapered design fits in tool pouchor pocket.



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	DIMENSION	VIALS	FRAME	COLOUR
YL19-9	Torpedo Magnet Level	9"/22.5cm	3	Aluminium	Black

Flash Pro Digital Level

- LCD screen with backlight • 360° display that automatically flips • Shows measurements in ° (degrees), % (slope), and mm/m.
- Two precision-machined leveling surfaces (top and bottom)
- Built-in horizontal and vertical vials for quick manual level checks
- Shock-resistant end caps with overmoulding for extra durability
- Use with 2 × AAA batteries [Included]



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	DIMENSION	ACCURACY	VIALS	COLOUR
SX06-100CM	Flash Pro Digital Level	40"/100cm	0.5 mm/m	2	Black

Flash Pro Self-Leveling Cross Laser

- Cross laser with automatic self-adjusting function, projects a horizontal and vertical laser line
- Automatic self-levelling range: ±3°
- Uses 2 x AA batteries (not included)
- Fits universal 1/4" tripods. (not included)



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LASER COLOUR	LASER LINE ACCURACY	MAX WORKING RANGE	COLOUR	DIMENSION
SP09	Flash Pro Self-Leveling Cross Laser	Red	0.5mm/m	7m	Black	65cm x 65cm x 85cm

Flash Post & Pipe Level

- Durable impact resistant molded body.
- 90° frame design fits on regular posts and round pipes.
- Durable hands-free strap holds level in place.
- Tough acrylic vials read plumb and level.
- Read upper two vials to check that post is plumb.
- Read vials in both directions to check for level and plumb.



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	VIALS	FRAME	COLOUR
175	Flash Post & Pipe Level	3	Aluminium	Black

Flash Ratchet Tie Downs

- Perfect for load securing & cargo restraint
- High-strength polyester webbing
- Heavy-duty ratchet buckle
- Reinforced steel hooks



Hanging Card Packaging



Clamshell Packaging

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SIZE	PCS/PACK	PACKAGING TYPE	LASHING CAPACITY	BREAKING STRENGTH	COLOUR
F-1250501	Flash Ratchet Tie Downs	25mm x 5m	1pc	Hanging Card	250 daN (kg)	500 daN (kg)	Orange
F-2250502	Flash Ratchet Tie Downs	25mm x 5m	2pcs	Hanging Card	250 daN (kg)	500 daN (kg)	Orange
F-1352001	Flash Ratchet Tie Downs	35mm x 5m	1pc	Hanging Card	1000 daN (kg)	2000 daN (kg)	Orange
F-2352002	Flash Ratchet Tie Downs	35mm x 5m	2pcs	Hanging Card	1000 daN (kg)	2000 daN (kg)	Orange
F-1503001	Flash Ratchet Tie Downs	50mm x 5m	1pc	Clamshell	1500 daN (kg)	3000 daN (kg)	Orange

Retractable Utility Knife & Blades

Locking Mechanism
Nonslip Rubber Grip | Blade width: 18mm
Material: ABS + Carbon steel



TL/KNF-BC



TL/KNF-BL

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	BLADE TYPE	BLADE SIZE	MATERIAL	CUTTER DIMENSIONS
TL/KNF-BC	Retractable Utility Knife	8 Snap-Off Blades	0.5 x 18 x 100mm	ABS	165 x 40 x 15mm
TL/KNF-BL	Retractable Utility Knife Blades • 20 Packs	10 Snap-Off Blades	0.5 x 18 x 100mm	Special Alloy Steel	N/A

Measuring Tape

Hook with hook slot | Belt Clip
Auto-Lock with Lock Release button for precise measuring



M-TAPE3M

M-TAPE5M

M-TAPE

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	MEASURING LENGTH	BLADE WIDTH	BLADE COLOUR	COLOUR	HOUSING	PCS/CRT
M-TAPE	Measuring Tape	10m	25mm	White	Black	60mm x 60mm	96
M-TAPE5M	Measuring Tape	5m	25mm	White	Black	60mm x 70mm	180
M-TAPE3M	Measuring Tape	3m	20mm	White	Black	55mm x 60mm	240

Nylon Cable Tie

- Material: Nylon 66
- Enhanced UV Protection



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	PCS PER PACK	MATERIAL	TENSILE STRENGTH	COLOUR		L x W mm	PCS/CRT
CT/650X12.0B	Cable Tie	100	Nylon 66	1117 N		Black	650mm x 12mm	20
CT/400X5.2B	Cable Tie	100	Nylon 66	245 N		Black	400mm x 5.2mm	80
CT/400X7.6B	Cable Tie	100	Nylon 66	540 N		Black	400mm x 7.6mm	50
CT/300X4.6B	Cable Tie	100	Nylon 66	216 N		Black	300mm x 4.6mm	140
CT/200X4.6B	Cable Tie	100	Nylon 66	216 N		Black	200mm x 4.6mm	180
CT/150X3.5B	Cable Tie	100	Nylon 66	176 N		Black	150mm x 3.5mm	300
CT/100X2.5B	Cable Tie	100	Nylon 66	78 N		Black	100mm x 2.5mm	600
CT/650X12.0W	Cable Tie	100	Nylon 66	1117 N		White	650mm x 12mm	20
CT/400X5.2W	Cable Tie	100	Nylon 66	245 N		White	400mm x 5.2mm	80
CT/400X7.6W	Cable Tie	100	Nylon 66	540 N		White	400mm x 7.6mm	50
CT/300X4.6W	Cable Tie	100	Nylon 66	216 N		White	300mm x 4.6mm	140
CT/200X4.6W	Cable Tie	100	Nylon 66	216 N		White	200mm x 4.6mm	180
CT/150X3.5W	Cable Tie	100	Nylon 66	176 N		White	150mm x 3.5mm	300
CT/100X2.5W	Cable Tie	100	Nylon 66	78 N		White	100mm x 2.5mm	600

Cable Clips



Cable Clip - Square



Cable Clip - Round



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SHAPE	PCS PER PACK	COLOUR	Clip mm	PCS/CRT
CC/4MM	Cable Clips	Round	100	White	4mm	500
CC/5MM	Cable Clips	Round	100	White	5mm	500
CC/6MM	Cable Clips	Round	100	White	6mm	400
CC/8MM	Cable Clips	Round	100	White	8mm	300
CC/9MM	Cable Clips	Round	100	White	9mm	250
CC/10MM	Cable Clips	Round	100	White	10mm	250
CC/20MM	Cable Clips	Round	100	White	20mm	50
CCSQ/4MM	Cable Clips	Square	100	White	4mm	500
CCSQ/5MM	Cable Clips	Square	100	White	5mm	500
CCSQ/6MM	Cable Clips	Square	100	White	6mm	400
CCSQ/8MM	Cable Clips	Square	100	White	8mm	300
CCSQ/9MM	Cable Clips	Square	100	White	9mm	250
CCSQ/10MM	Cable Clips	Square	100	White	10mm	250

Duct Tape



F/DC10MS



F/DC20MS

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	THICKNESS	WIDTH	LENGTH	COLOUR
F/DC10MS	Duct Tape	0.2mm	50mm	10m	Silver
F/DC20MS	Duct Tape	0.2mm	50mm	20m	Silver

LED RGB USB Fairylights with Remote · 3 Year Guarante

14 Customizable Features



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LED QTY	MATERIAL	VOLTAGE	COLOUR TEMPERATURE	L (MM)	IP	PKG
BL/SL5MUSB	LED RGB USB Fairylight	100	ABS / PVC / Copper	5VDC	RGB	5m	IP20	Blister Pack
BL/SL10MUSB	LED RGB USB Fairylight	100	ABS / PVC / Copper	5VDC	RGB	10m	IP20	Blister Pack

Halogen PAR38 Infrared Lamp [230V 50Hz] · 1 Year Guarante



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	LAMP HOLDER	POWER FACTOR	COLOUR	H X D (MM)	IP
HL/PR38IF	Halogen PAR38 Infrared Lamp	175W	E27	1	Red	145mm x 120mm	IP20

Insect Killers [230V 50Hz] · 3 Year Guarante

Suspendable / Free standing
T5 & T8 UV-A Fluorescent Tubes



Insect Killer - Rectangular
N-GC2-12



Insect Killer - Rectangular
N-GC2-20



Insect Killer - Round
N-GP2-4A



LED Insect Killer Lamp
N-DYT-80BC

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	WATTAGE	LAMP CAP	MATERIAL	COLOUR / TEMPERATURE	L X W X D (MM)	IP	PCS/CRT
N-GP2-4A	Insect Killer - Round	6.5W	T5	ABS Fire Resistant	Black	240mm x 110mm	IP20	20
N-GC2-12	Insect Killer - Rectangular	6W x 2	T5 x 2	ABS Fire Resistant	Grey	288mm x 75mm x 265mm	IP20	8
N-GC2-20	Insect Killer - Rectangular	10W x 2	T8 x 2	ABS Fire Resistant	Grey	405mm x 70mm x 260mm	IP20	5
N-DYT-80BC	LED Insect Killer Lamp	6W	B22	ABS & PC	6500K	155mm x 79mm	IP20	40

Flash School Project Kit

Build Your Own Lighting Circuit
Includes:

- 2 x 6 Volt Torch Lamps
- 2 x E10 Lampholders
- 1 x 9 Volt Alkaline Battery
- 1 x Battery Clip
- 1 x Push Button Lamp Switch
- 1 x 500mm Rip Cord



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	TORCH LAMPS	CAP / LAMPHOLDER	BATTERY	CORD LENGTH	TOTAL PCS / KIT
SP-KIT	Flash School Project Kit - Build Your Own Lighting Circuit	6V	E10	9V Alkaline Battery	500mm	8

Torches · 1 Year Guarantee



YF/TH30B



YF/PS24-2D



YF/PS25-2AA



YF/RB08-3D



YF/RB07-2D



YF/RB06-2AA



YF/PS10-3AAA

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	BATTERIES	MATERIAL	COLOUR	L X W X D (MM)	PACKAGING	PCS/CRT
YF/PS10-3AAA	13 LED Torch with Carry-strap - Weather Proof	3 x AAA [Excl.]	Plastic	Assorted - Black / Yellow	94mm x 29mm	12 pcs / Tray	96
YF/RB06-2AA	3 LED Torch with Carry-strap	2 x AA [Excl.]	Rubber	Black	150mm x 40mm	Blister Pack	120
YF/RB07-2D	3 LED Torch with Carry-strap	2 x D [Excl.]	Rubber	Black	200mm x 65mm	Blister Pack	60
YF/RB08-3D	3 LED Torch with Carry-strap	3 x D [Excl.]	Rubber	Black	250mm x 65mm	Blister Pack	60
YF/TH30B	13 LED Carry Torch	4 x D [Excl.]	Plastic	Yellow	200mm x 110mm	Box	36
YF/PS24-2D	3 LED Torch	2 x D [Excl.]	Plastic	Assorted - Blue / Red	190mm x 55mm	12 pcs / Tray	96
YF/PS25-2AA	3 LED Torch	2 x AA [Excl.]	Plastic	Assorted - Blue / Yellow	150mm x 40mm	16 pcs / Tray	128

FLASH™

Torches & Lanterns

LED Work Lights & Key Chain
with Magnetic Base [Battery Operated]
1 Year Guarantee

Torches &
Lanterns



BL/WL057

- LED COB
- Magnetic Base
- Front: 3W
- Top: 1W
- Daylight 6000K
- Battery: 3 x AAA (Excl.)

BL/WL018

- Front: 20 LED
- Top: 3 LED
- Magnetic Base
- 360° Hanger · Adjustable
- Daylight 6000K
- Battery: 3 x AAA (Excl.)

BL/WL33B

- LED COB
- Magnetic base
- Daylight 6000K
- Battery: 3 x AA (Excl.)

BL/KC51-BR

- 3 Light Modes:
 - 100% Brightness
 - 60% Brightness
 - Strobe Light
- LED COB
- Magnetic base
- Daylight 6000K
- Battery: 2 x CR2032 (Incl.)



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	BATTERIES	MATERIAL	COLOUR	L X W X D (MM)	PACKAGING	PCS/CRT
BL/WL33B	3W LED Work Light with Magnetic Base	3 x AA [Excl.]	ABS	Black	N/A	12 pcs / Tray	144
BL/KC51-BR	1W LED Key Chain with Magnetic Base	2 x CR2032 [Incl.]	Plastic & Aluminium	Black / Red	N/A	24 pcs / Tray	129
BL/WL018	2 in 1 LED Work Light with Magnetic Base	3 x AAA [Excl.]	Rubberised PC	Black / Red	N/A	12 pcs / Tray	72
BL/WL057	3 in 1 LED Work Light with Magnetic Base	3 x AAA [Excl.]	Rubberised PC	Black / Red	N/A	12 pcs / Tray	48

LED Night Light Switch [Battery Operated] · 3 Year Guarantee

Integrated LED Light | No Additional Lamp Required
Recommended Batteries [Excluded]: Flash AAA Alkaline Batteries
Mounting Features: Velcro / Magnets / Hook slot



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	BATTERY	MATERIAL	COLOUR	L X W X D (MM)	PCS/CRT
BL/NL-WW	LED Night Light Switch	50 lm	1W	 3000K	4 x AAA	PC	 White	100mm x 80mm	100

Ultra Bright Apollo Rechargeable LED Lantern [230V 50Hz] · 1 Year Guarantee

Features:

- High power battery with built-in protection.
- AC Cable (2-pin plug) Included.
- USB 5V output suitable to charge most mobile phones
- Carry handle and wall mounting options.
- Lasts up to 60 hours when fully charged.
- 6V 4Ah Lead Acid Battery
- 10 Hours Charge Time
- Indoor IP20

- 2 working modes:
- High-Power 24 LED, 6W 1000lm
 - Power-Saving 8 LED, 3W 400lm



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	COLOUR	L X W X D (MM)
OJ-2790	Ultra Bright Apollo Rechargeable LED Lantern	1000 lm	6W	 6500K	 Black	195mm x 85mm x 95mm

LED Portable Lanterns [230V 50Hz] · 1 Year Guarantee
Rechargeable [AC Power cable Included]

Torches & Lanterns



OJ-7205

- High powered built-in battery
- Lasts up to 6 hours on a full charge



OJ-7260



YF/TL-CAL54M

- Dimmable Function
- High powered built-in battery
- Lasts up to 6 hours on a full charge
- 360° lamp rotation



YF/TL-CAL65B

- Switch Function Pull Out / Push-In
- USB [For charging only]
- 3 Hours charging time
- Lasts up to 5-6 hours on a full charge
- Optional: Can be battery powered [3 x AA batteries Excluded]



TECHNICAL SPECIFICATIONS


ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	COLOUR	L X W X D (MM)	PCS/CRT
OJ-7205	30 LED Lantern	150 lm	1.5W	6000K	 White	200mm x 55mm x 28mm	50
OJ-7260	60 LED Lantern	250 lm	2.5W	6000K	 White	350mm x 55mm x 31mm	50
YF/TL-CAL54M	40LED Dimmable Camping Lantern	350 lm	5W	6400K	 White	190mm x 125mm	15
YF/TL-CAL65B	LED Mini Lantern	N/A	3W	6000K	 Black	185mm x 85mm	48

Alkaline & Super Heavy Duty Batteries

Packaging: Blister Pack

Alkaline Batteries - 0% Mercury & Cadmium

Super Heavy Duty Batteries

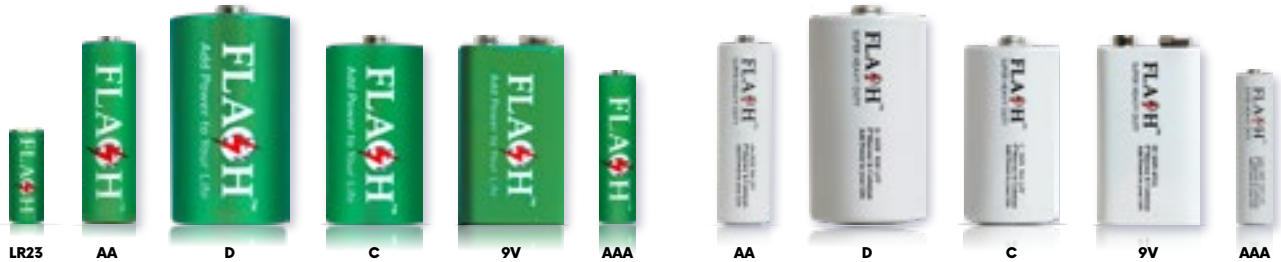


TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SIZE	VOLTAGE	L X W X D (MM)	PCS / BLISTER PACK	PCS / INNER BOX	PCS/CRT
6LR61	Alkaline Battery	6LR61	9V	48mm x 26mm	1 Piece	12	144
LR03/2	Alkaline Battery	AAA	1.5V	44mm x 10mm	2 Pieces	12	144
LR03/4	Alkaline Battery	AAA	1.5V	44mm x 10mm	4 Pieces	12	144
LR14	Alkaline Battery	C	1.5V	49mm x 25mm	2 Pieces	6	120
LR20	Alkaline Battery	D	1.5V	61mm x 33mm	2 Pieces	6	72
LR23	Alkaline Battery	LR23	12V	28mm x 10mm	1 Piece	12	144
LR6/2	Alkaline Battery	AA	1.5V	50mm x 14mm	2 Pieces	12	144
LR6/4	Alkaline Battery	AA	1.5V	50mm x 14mm	4 Pieces	12	144
R03P/2	Super Heavy Duty	AAA	1.5V	44mm x 10mm	2 Pieces	12	144
R03P/4	Super Heavy Duty	AAA	1.5V	44mm x 10mm	4 Pieces	12	144
R14P	Super Heavy Duty	C	1.5V	49mm x 25mm	2 Pieces	6	120
R6P/2	Super Heavy Duty	AA	1.5V	50mm x 14mm	2 Pieces	12	144
R6P/4	Super Heavy Duty	AA	1.5V	50mm x 14mm	4 Pieces	12	144
R20P	Super Heavy Duty	D	1.5V	61mm x 33mm	2 Pieces	6	72
R20P-20	Super Heavy Duty	D	1.5V	61mm x 33mm	12 Pieces	12	144
6F22	Super Heavy Duty	6F22	9V	48mm x 26mm	1 Piece	12	144

TESTED

FLASH Alkaline Batteries last as long as international leading brands.

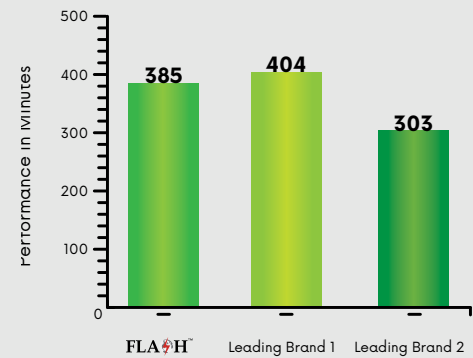

SABS Performance Comparison Test

A total of 30 AA FLASH Alkaline batteries were tested continuously using a 3.9 resistor. The discharge cut-off time was recorded at 0.9V

SABS Reference: Report No. 7246/2401596/TY15A

Flint / Piezo / Jet flame/ BBQ Lighters
[Non-refillable & Refillable]



Lighters



Flint Lighter
FL/HP-01



Piezo Lighter
FL/DY-075



Jet Flame Lighter
FL/ZL-10



Jet Flame Lighter
FL/HC-706



BBQ Lighter
FL/HC1011



BBQ Lighter
FL/HC1009

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	REFILL / NON REFILL	MATERIAL	L X W X H (MM)	COLOUR	PCS/TRAY/BLISTER	PCS/CRT
DY-075	Piezo Lighter	Refillable	ABS	80mm x 24mm x 11mm	 Assorted - Black / Red / Blue / White	50 Pcs / Tray	1000
FL/HC1009	BBQ Lighter Adjustable Nozzle	Refillable	ABS & Steel	275mm x 46mm x 26mm	 Red & Black	1 Blister	120
FL/HC1011	BBQ Lighter Straight Nozzle	Refillable	ABS & Steel	260mm x 41mm x 26mm	 Black & Red	25 Pcs / Tray	200
HP-01	Flint Lighter	Non Refillable	ABS	80mm x 24mm x 11mm	 Assorted - Black / Red / Blue / White	50 Pcs / Tray	1000
ZL-10	Jet Flame Lighter	Refillable	Plastic / Rubber finish	71.5mm x 38mm x 19mm	 Assorted - Black / Red / Blue / White	20 Pcs / Tray	500
HC-706	Jet Flame Lighter	Refillable	Plastic / Rubber finish	71.5mm x 38mm x 19mm	 Assorted - Blue / Black	20 Pcs / Tray	500



Everyday Essentials!

You need it? We've got it!



Evolution



Evolution is a high-performance brand for commercial, rural, and mining applications. Built with durability and higher technical specifications.

Modular Slim LED Floodlight [100V - 280V 50Hz] Non-Dimmable · 3 Year Guarantee

Evolution


LED: Philips [Lumileds]
Surge Protection
>0.9 Power Factor
Isolated Driver
Modular Connecting
Brackets Included

100W

Total Lumen:
15000lm
Wattage: 100W

150W

Total Lumen:
22500lm
Wattage: 150W

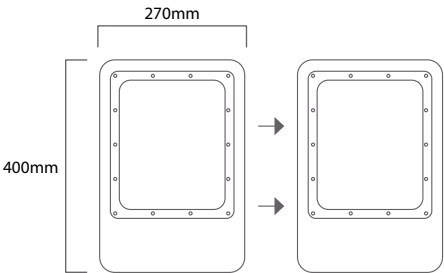

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	VOLTAGE	COLOUR TEMPERATURE	SURGE PROTECTION	COLOUR	H X W (MM)	PCS/CRT
EV/MO100W	MODULAR SLIM LED FLOODLIGHT	15000 LM	100W	100V-280V · 50HZ	6000K	4KV	Matt Grey	400 X 270	5
EV/MO150W	MODULAR SLIM LED FLOODLIGHT	22500 LM	150W	100V-280V · 50HZ	6000K	4KV	Matt Grey	400 X 270	5

*Note: This product has a 3 year guarantee for domestic and commercial use. For industrial and hazardous applications such as mines, quarries, processing plants or for mounting onto moving or vibrating machinery, the guarantee is 18 months.

Slim LED Floodlights [100V-280V 50Hz] Non-Dimmable · 3 Year Guarantee

LED: Philips [Lumileds]
CRI: 80
5KV Protection
>0.9 Power Factor
Isolated Driver

150lm/W

120°

IP65



3
YEAR
GUARANTEE

CRI 80 +

50W
Total Lumen: 7500lm
Wattage: 50W



ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	VOLTAGE	COLOUR TEMPERATURE	SURGE PROTECTION	COLOUR	H X W (MM)	PCS/CRT
EV/FL050W	SLIM LED FLOODLIGHT	7500 LM	50W	180V-280V · 50HZ	6000K	5KV	Matt Grey	220 X 210	10

High Power LED Floodlight [100V-280V 50Hz] Non-Dimmable · 3 Year Guarantee

LED: Philips [Lumileds]
CRI: 80
5KV Protection
THD <12%
>0.9 Power Factor
Isolated Driver

150lm/W

120°

IP65



3
YEAR
GUARANTEE

CRI 80 +

600W
Total Lumen: 90000lm
Wattage: 600W



ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	VOLTAGE	COLOUR TEMPERATURE	SURGE PROTECTION	COLOUR	H X W (MM)	PCS/CRT
EV/FL600W	HIGH POWER LED FLOODLIGHT	90000 LM	600W	100V-280V · 50HZ	6000K	5KV	Matt Grey	775 X 459	1

*Note: This product has a 3 year guarantee for domestic and commercial use. For industrial and hazardous applications such as mines, quarries, processing plants or for mounting onto moving or vibrating machinery, the guarantee is 18 months.

High Power LED Floodlight [230V 50Hz]
Non-Dimmable · 3 Year Guarantee

Evolution



LED: Philips [Lumileds]
CRI: 80
6KV Protection
>0.9 Power Factor
Isolated Driver

1000W

Total Lumen: 110000lm
Wattage: 1000W



ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	VOLTAGE	COLOUR TEMPERATURE	SURGE PROTECTION	COLOUR	H X W x D (MM)	PCS/CRT
EV/FL100W	HIGH POWER LED FLOODLIGHT	110000 LM	1000W	230V · 50HZ	 6500K	6KV	 Matt Grey	775 X 459	1

*Note: This product has a 3 year guarantee for domestic and commercial use. For industrial and hazardous applications such as mines, quarries, processing plants or for mounting onto moving or vibrating machinery, the guarantee is 18 months.

LED *basic*

A budget-friendly range with a 1-year guarantee, ideal as a second-price point offering alongside Flash.



LED BASIC A60 Lamps [230V 50Hz] Non-Dimmable · 1 Year Guarantee

LED basic



Wattages

4W

7W

Available Caps

E27

B22



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	LAMP SHAPE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	L X W X D (MM)	PCS/CRT
E/XLED-A6004	4E26	A60	LED Lamp	420 lm	4W	E27	6000K	100mm x 60mm	50
E/XLED-A6004	4E23	A60	LED Lamp	420 lm	4W	E27	3000K	100mm x 60mm	50
E/XLED-A6004	4B6	A60	LED Lamp	420 lm	4W	B22	6000K	100mm x 60mm	50
E/XLED-A6004	4B3	A60	LED Lamp	420 lm	4W	B22	3000K	100mm x 60mm	50
E/XLED-A6007	7E26	A60	LED Lamp	735 lm	7W	E27	6000K	100mm x 60mm	50
E/XLED-A6007	7B6	A60	LED Lamp	735 lm	7W	B22	6000K	100mm x 60mm	50

LED Basic GU10 Lamps [230V 50Hz] Non-Dimmable · 1 Year Guarantee

Body & Lens Style May Vary



Wattage



Cap



TECHNICAL SPECIFICATIONS

ITEM NUMBER	AUX NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	L X W X D (MM)	PCS/CRT
E/BA/SMD3	3G6	Frosted	Non-Dimmable SMD LED Lamp	315 lm	3W	GU10	6000K	60mm x 49mm	100

LED Basic Integrated LED Downlight [230V 50Hz] Non-Dimmable · 1 Year Guarantee

No Additional Lamp Required
60° Adjustable [Tilt] · Round

Wattage



TECHNICAL SPECIFICATIONS

ITEM NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	MATERIAL	COLOUR TEMPERATURE	Ø X D (MM)	CUT-OUT	IP RATING
BL/PLSS-5DL	COB	Integrated LED Downlight	325lm	5W	ABS	6000K	Ø90mm x 18mm	72mm	IP20

LED Basic 3 in 1 Downlight Kit [230V 50Hz] Non-Dimmable · 1 Year Guarantee

LED Basic GU10 Lamp + Downlight Fitting + Lampholder
Lamp Body & Lens Style May Vary

Wattage

3W



TECHNICAL SPECIFICATIONS

ITEM NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	L X W X D (MM)
DL/3IN1-D	Frosted	3 in 1 Downlight Kit	315 lm	3W	GU10	 6000K	60mm x 49mm
DL/3IN1-WW	Frosted	3 in 1 Downlight Kit	315 lm	3W	GU10	 3000K	60mm x 49mm

LED Basic 3 in 1 Downlight Kit Value Pack [230V 50Hz] Non-Dimmable · 1 Year Guarantee

10 x LED Basic GU10 Lamps + 10 x Downlight Fittings + 10 x Lampholders
Lamp Body & Lens Style May Vary

Wattage

4W



TECHNICAL SPECIFICATIONS

ITEM NUMBER	STYLE	DESCRIPTION	LUMEN	WATTAGE	CAP	COLOUR TEMPERATURE	L X W X D (MM)
DL/3IN1VP-D	Frosted	3 in 1 Downlight Kit Value Pack	315 lm	3W	GU10	 6000K	60mm x 49mm

LED Basic Floodlights [230V 50Hz] • 1 Year Guarantee

Beam Angle 120° • Body Material - Aluminium • Colour - Black

LED basic



TECHNICAL SPECIFICATIONS

ITEM NUMBER	SURGE PROTECTION	DESCRIPTION	LUMEN	WATTAGE	MATERIAL	COLOUR TEMPERATURE	L X W X D (MM)	PCS/CRT
BA-ZR-TG005	2.5KV	Slim LED Floodlight	650 lm	10W	Aluminium	6000K	120mm x 86mm	100
BA-ZR-TG002	2.5KV	Slim LED Floodlight	1300 lm	20W	Aluminium	6000K	107mm x 76mm	60
BA-ZR-TG008	2.5KV	Slim LED Floodlight	2000 lm	30W	Aluminium	6000K	148mm x 115mm	40
BA-ZR-TG009	2.5KV	Slim LED Floodlight	3300 lm	50W	Aluminium	6000K	190mm x 140mm	40
BA-ZR-TG100	4KV	Slim LED Floodlight	6500 lm	100W	Aluminium	6000K	265mm x 200mm	16
BA-ZR-TG150	4KV	Slim LED Floodlight	9750 lm	150W	Aluminium	6000K	300mm x 200mm	10
BA-ZR-TG200	4KV	Slim LED Floodlight	13000 lm	200W	Aluminium	6000K	340mm x 200mm	6


LED *basic*

LED Basic UFO High Bay Lamp [230V 50Hz]

Non-Dimmable · 1 Year Guarantee

Integrated LED Light | No additional lamp required
Suspension mounted (chain excl.)

LED basic

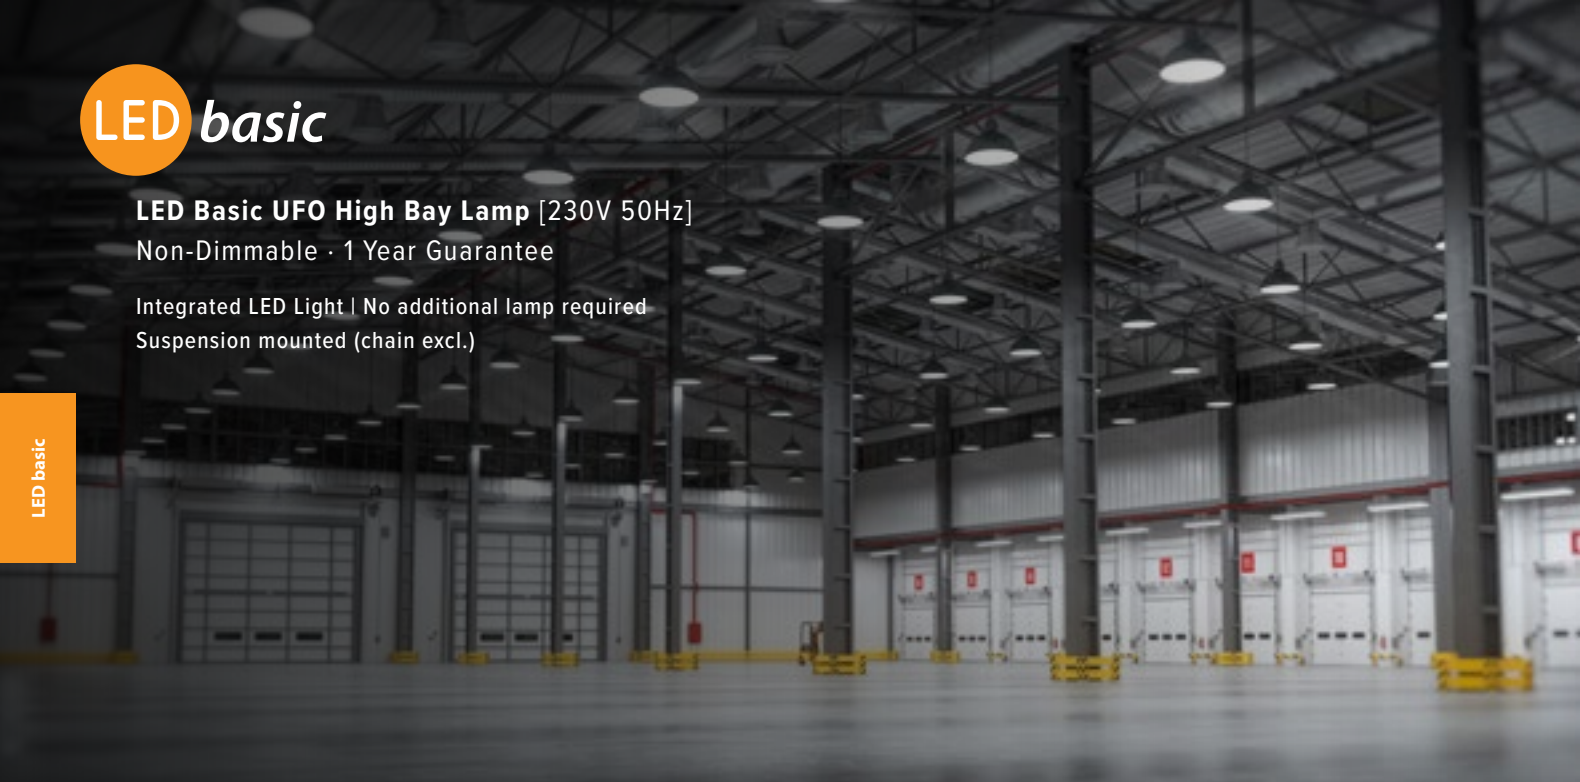

Wattages

150W 200W



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LUMEN	WATTAGE	COLOUR TEMPERATURE	SURGE PROTECTION	L X W X D (MM)
BA/UFO150W	Non-Dimmable LED Integrated High Bay	15000 lm	150W	6500K	4KV	40mm x 270mm
BA/UFO200W	Non-Dimmable LED Integrated High Bay	20000 lm	200W	6500K	4KV	40mm x 330mm



HARRY'S HOMWARE

A carefully curated selection of home essentials including pots, pans, and glassware, catering to everyday household needs.



Borosilicate Glass Food Containers

Heat-resistant, safe for microwave, oven, freezer, and dishwasher use.



Borosilicate Glass Food Container with French Lock Lid



Borosilicate Glass Food Container with Click Lock Lid

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	LID LOCK	SIZE	SHAPE	MATERIAL	L X W X D (MM)	PCS/CRT
HH/G/CRC370	Rectangle Borosilicate Glass Food Container	Click Lock Lid	370ml	Rectangle	Borosilicate Glass	155mm x 115mm x 60mm	24
HH/G/CRC640	Rectangle Borosilicate Glass Food Container	Click Lock Lid	640ml	Rectangle	Borosilicate Glass	179mm x 137mm x 63mm	24
HH/G/CRF370	Rectangle Borosilicate Glass Food Container	French Lock Lid	370ml	Rectangle	Borosilicate Glass	176mm x 110mm x 52mm	60
HH/G/CRF640	Rectangle Borosilicate Glass Food Container	French Lock Lid	640ml	Rectangle	Borosilicate Glass	200mm x 132mm x 55mm	48
HH/G/CRF1040	Rectangle Borosilicate Glass Food Container	French Lock Lid	1040ml	Rectangle	Borosilicate Glass	225mm x 155mm x 65mm	36
HH/G/CSQF800	Square Borosilicate Glass Food Container	French Lock Lid	800ml	Square	Borosilicate Glass	177mm x 157mm x 65mm	36

Borosilicate Glass Oven Dish

Oven, dishwasher, microwave, and freezer safe.



Oval Borosilicate Glass Oven Dish



Rectangle Borosilicate Glass Oven Dish

TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SIZE	SHAPE	MATERIAL	L X W X D (MM)	PCS/CRT
HH/G/OO0.7L	Oval Borosilicate Glass Oven Dish	700ml	Oval	Borosilicate Glass	206mm x 136mm x 50mm	24
HH/G/OO1.6L	Oval Borosilicate Glass Oven Dish	1.6L	Oval	Borosilicate Glass	260mm x 180mm x 65mm	24
HH/G/OO2.4L	Oval Borosilicate Glass Oven Dish	2.4L	Oval	Borosilicate Glass	304mm x 213mm x 70mm	60
HH/G/OS1.6L	Borosilicate Glass Oven Dish	1.6L	Rectangle	Borosilicate Glass	295mm x 175mm x 60mm	48
HH/G/OS2.2L	Rectangle Borosilicate Glass Oven Dish	2.2L	Rectangle	Borosilicate Glass	345mm x 205mm x 60mm	36



7 Piece Aluminium Cookware Set

Non-stick, heat-resistant coating, dot induction base,
bakelite handle, blue outer finish

Includes:

- 16cm Sauce Pan with lid
- 20cm Casserole Pot with lid
- 24cm Casserole Pot with lid
- 24cm Frying Pan



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SET SIZE	COLOUR	MATERIAL	INCLUDES	PCS/CRT
HH/AL/SET	7 Piece Aluminium Cookware Set	7 Pieces	Blue	Aluminium	Sauce Pan, 2 x Casserole Pots, Frying Pan	1

Aluminium Non-Stick Frying Pan

Non-stick, heat-resistant coating, dot induction base,
bakelite handle, blue outer finish



TECHNICAL SPECIFICATIONS

ITEM NUMBER	DESCRIPTION	SIZE	COLOUR	MATERIAL	L X W X D (MM)	PCS/CRT
HH/AL/P20B	20cm Aluminium Non-Stick Frying Pan	20cm	Blue	Aluminium	386mm x 200mm x 63mm	6
HH/AL/P24B	24cm Aluminium Non-Stick Frying Pan	24cm	Blue	Aluminium	425mm x 240mm x 63mm	6
HH/AL/P26B	26cm Aluminium Non-Stick Frying Pan	26cm	Blue	Aluminium	446mm x 260mm x 63mm	6
HH/AL/P28B	28cm Aluminium Non-Stick Frying Pan	28cm	Blue	Aluminium	466mm x 280mm x 63mm	6

Icon Glossary

 5W Wattage	 Beam Angle 38°	 PIR Sensor	 Radar Motion Sensor	 3 Year Guarantee
 E27 Cap	 3-Step Dimmable	 Dimmable	 Surge Protection	 2 Year Guarantee
 E14 Cap	 T8 Tube	 12V 12 Volts	 USB Port	 1 Year Guarantee
 B22 Cap	 Frosted Tube	 IP Rating IP65	 Day / Night Sensor	 LED Integrated
 GU10 Cap	 Clear Tube	 Magnetic	 Linkable	 Tunable White LED LIGHT
 MR16 Cap	 Bright	 300mm Size	 Square Shape	 LAST UP TO 60hrs
 180° Detection Angle	 Speaker for Music	 Bluetooth	 USB Port	 Type C USB Port

Evolution Icons

 150lm/W Lumen Per Watt	 120° Beam Angle	 IP65 IP Rating	 Surge Protection
--	---	--	---

WHAT OUR CLIENTS SAY ABOUT US

"I have been dealing with Flash for a couple of years now and they are unlike any other supplier when it comes to service... definitely the best! The products are really good." - P

"On behalf of everyone within the Legendary Retail Brands Group, I would like to take this opportunity to recognize and personally thank you for your tireless efforts in maintaining supply to our stores around the country." - LRB

"This is the first time ever I have received assistance of this nature. Thank you for the effort you have put in to assist me." - D

"You always step up your game! I am extremely pleased with the deals. Thank you again for your continued support and cooperation, it's well noticed." - PdL

"I purchased some Flash LED lamps from a supplier some time back, and I am so impressed with your product that I don't want to use anything else." - RR

"I just want to say thank you so much for the excellent service and for arranging the supply of the lights so promptly. I will be recommending Flash products to all my clients going forward." - HT

"I have been using your LED globes now for more than a year, they are awesome!!! We have two big homes in our family and they are 90% converted to your LED globes by now." - KK

"Just some feedback on that Flash lighting job... The guys have been superbly helpful all the way through. I can only have good things to say about the service. Thank you. Super Chuffed!! Thanks a mill!" - J

"...due to her (Lee-Ann Meyer) excellent product knowledge and communication skills resulting in an increase of the Flash Brand name in our store, but more importantly our town." - ST

"Thank you (Roceal) for being so good to us. Your service is excellent; your product quality is good, your prices are reasonable, our customers are very happy." - DM

"I would just like to compliment your company on your service and technical support, I ended up having a nice chat with one of your technicians about my inquiry. I thought it might have been a dumb question but it was valuable to me as well as the follow up from your side. Keep up the good work and I like the spirit that you represent every time that we have spoken on the phone." - MA

"So I'm 22 years old and decided to start an online hardware store with mother and we've been with Flash for 5 months so far and I can't believe how quick it's grown and a big part of it that has made it possible is the Homemakers deals and the excellent sales team, they are always willing to help you out." - M

"Hello TEAM FLASH. Thank you for the brilliant catalogue "Understanding Lighting" that has been sent around with your sales rep in KZN. This is the first since LED technology came into the market that we were presented with such an outstanding tool to help us market LED. Finally now we can sell LED products with great confidence and knowledge that we never had before. Keep up the great work of being leaders in innovation and price." - NN

"I would like to thank you for the outstanding service offered by your company. It is unusual in these times to receive the outstanding service your staff offer." - SI

"I must admit that I was greatly impressed by your test/evaluation facility as it gives one so much more confidence in selling, knowing that the product available has actually been evaluated and tested, making sure that the standards required are met, and that Flash is NOT just another importer trying to flog a product into the African market place." - JP

"We at Avravision have used your Homemakers promotion for the past year. We are excited to give you some feedback. It's been very positive as it has allowed us to give our customers these specials on a monthly basis. And with the prices being fixed, it has allowed fair trade with a fixed low mark up, this allows the consumer to get the best possible deal. We hope that Flash continues with this 'tradition' ." - N

"We are grateful to have an excellent sales rep who continues to market his products with such confidence and enthusiasm. It has not been easy for him to get his foot in our doors but persistence pays!!! Also not forgetting one of the country's TOP NOTCH sales lady, LAUREN who works for Flash. My word, she is good at her job and never gives up promoting her lines. Very professional and dedicated in her duties. Keep up the good work you two!!!" - NN

"Super company with super service! Thank you!" - P

"The monthly advertising in Flash Homemakers has not only brought more feet to our store but also made people realise how big we are, most clients thought we only supplied DIY products but now realise we supply material for all parts of a house from construction to decorating."

"After several years with Flash, we found the service to be great and the product to be value for money. We started reselling the product in the midst of "Load-shedding" encouraging people to go to more efficient and power saving globes and products, that's where it all started for us. Flash has been a product that became part of our family items that will stay for years to come."

"It has been a pleasure working with the staff and the products at Flash. When new products come in, they keep us up to date. They give us assistance when we need it, and the staff is very friendly, from the lady that answers the switchboard to the sales personnel. We keep our customers happy with the good quality product and good price. Thank you very much Flash for the great service we get from you." - LS

"Everything about your product just spells CLASS! From the packaging, the simple operating instructions, the soldered cable ends..... and the fact that they worked exactly as they should have."

"We started working with Flash a month ago and they created a newsletter for us which we mail to our clients, a new way of communicating with them. This helps us to showcase our product range to our customers, specials we can offer them, getting orders on email and getting our products marketed, it's been working great for us" - LV

"Since we started the Homemakers in March 2017, we were a little sceptic to see how this could impact our business as we don't even get the magazine for kilometres surrounding us. After being convinced by your friendly and helpful staff that it's not just about the advertising but the pricing too, we jumped right into the next wave of the Flash business. We started off with a bang, made a separate section in our front store for the monthly specials. Sent out some photos of the special on email and our community Whatsapp groups. Since the get-go the special products flew off our shelves. The 'Homemakers' have become a speaking item among the people of our town and people can't wait to see what's next on special. Thank you for the amazing initiative of starting this awesome venture" - RC

Flash Components (Pty) Ltd

info@flash.za.com • www.flash.za.com

Tel: +27 (0) 21 788 5532

Head Office Cape Town

14 Gateway Close, Capricorn Business Park

Muizenberg, 7945, Cape Town, South Africa

Flash Components (Pty) Ltd

info@flash.za.com • www.flash.za.com

Tel: +27 21 788 5532

Head Office Cape Town

**14 Gateway Close, Capricorn Business Park
Muizenberg, 7945, Cape Town, South Africa**



**Lighting Africa
Saving Energy
Saving You Money**